


PSU-1208-L(P)

Description & Features

PSU-1208-L(P) is a plastic box UPS power supply, its main output is 13.8V / 8A with additional 750mA charge current. It could be used for various security and automation systems.

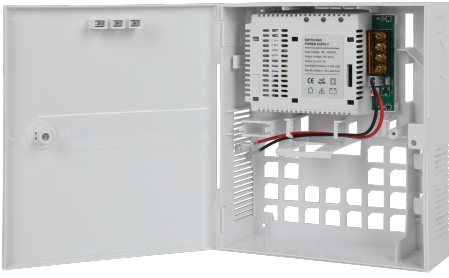

- High efficiency up to 88%, long life and high reliability
- Protections: overload / over voltage / short circuit / battery deep discharging
- Multi-functional LED indicators
- No delay battery boots up
- Patented plastic box design, wall mount installation
- Optional modules to extend the usages
- 100% full load burn-in test



SPECIFICATION

INPUT	Voltage Range	190 - 265VAC	
	Frequency Range	50 - 60Hz	
	Efficiency (Typ.)	>88%	
OUTPUT	Voltage	13.8V	
	Rated Current	8A	
	Rated Power (Max.)	120W (includes charging)	
	Ripple & Noise	<100mVp-p	
	Line Regulation	±2%	
	Load Regulation	±2%	
	Channel	1 channel	
CHARGING	Voltage	13.8V	
	Current	750mA	
		Constant current mode	
PROTECTION	Overload	115% ±5%	
		Hiccup mode (resumes automatically after fault condition is removed)	
	Over Voltage	16V ±5%	
		Hiccup mode (resumes automatically after fault condition is removed)	
	Short Circuit	Hiccup mode (resumes automatically after fault condition is removed)	
	Battery Deep Discharging	10V ±2% (shuts down until AC power resumes)	
ENVIRONMENT	Temperature	Working: -20 - 50℃	Storage: -30 - 80℃
	Humidity	Working: 20 - 80%RH	Storage: 10 - 90%RH
LED INDICATOR	AC Power (Red)	On	AC input is okay
	Battery (Yellow)	On	Battery is fully charged
		Off	Battery is discharging
		Flickering	Battery is charging
	DC Output (Green)	On	DC output is okay
CONFORMITY	EMC Standard	EN 55032, EN 55035, EN 61000-3-2, EN 61000-3-3	
	LVD Standard	EN 62368	
DIMENSION	Plastic Box	228 x 195 x 78mm (fits for a 12V 7-9Ah battery)	
	Package	45 x 42.5 x 26.5cm / CTN, 10kg / CTN, 10pcs / CTN	