

10 Ports Full Giga PoE Switch

8*GE POE+1*Giga RJ45+1*Giga*SFP PoE Switch

EWIND



- 8*10/100/1000M POE+ 1*1000M RJ45 Port +1*1000M SFP Port PoE Switch,1-8 ports support IEEE 802.3af/at;
- Comply with IEEE 802.3, IEEE 802.3u, IEEE802.3ab,IEEE802.3z standards;
- PoE port support AF/AT intelligent recognition. Standard power is 15.4W/port, Maximum power: 30W/port;
- **Support AI Watchdog, Port self-healing, VLAN, extend 300meter distance, Auto Speed Change, Priority port & reduce the after-resale;**
- Supports POE devices such as wireless access points (APs) and network surveillance cameras through Category 5/6 Ethernet cables;
- The power supply total is 120W;
- 3 years warranty.

RoHS **FC** **CE**

Introduction

The EW-S1910CFG-DP series is a gigabit unmanaged PoE switch. It has 8*10/100/1000M POE+ 1*1000M RJ45 Port +1*1000M SFP Port. Port 1-8 can support IEEE 802.3af/at standard PoE power supply. single port PoE power reaches 30W, and the maximum PoE output power is 120W(at-250W). As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable. It can supply power to POE terminal equipment such as wireless AP, webcam, VoIP phone, building visual access control intercom, etc. through a network cable to meet the network environment that needs high-density PoE power supply. It is suitable for hotels, campuses, parks, shopping malls, scenic spots, hospitals, factory dormitory and small and medium-sized enterprise.


TECHNICAL SPECIFICATION

Model	EW-S1910CFG-DP
Fixed Port	8*10/100/1000Base-T/TXPoE ports (Data/Power) 1*10/100/1000Base-T/TX Uplink RJ45 ports (Data) 1*100/1000Base-X Uplink SFP ports (Data)

PoE Port	Port 1-8 support PoE @ IEEE802.3af/at
Feature	With the Dial code switch, support port priority by default. E: AI Extend 300meters transmission and auto speed change of single port (limit 10Mbps), other ports maintain 100M/1000M within 100 meters; V: Turn on, 1-4 Port support each port Isolation & VLAN; D: Turn on, 1-4 Port support AI-PoE Network self-healing mode (PoE Watchdog function), Automatic solve the camera problem & reduce after-sale.
Network Protocol	IEEE802.3 10BASE-T; IEEE802.3i 10Base-T; IEEE802.3u 100Base-TX; IEEE802.3ab 1000Base-T; IEEE802.3z 1000base-X; IEEE802.3x.
PoE Standard	IEEE802.3af/at
Ethernet Port	10/100/1000Base-T(X) 10/100/1000 Base-T automatic detection, full/half Duplex
Feature	MDI/MDI-X adaptive
Forwarding Mode	Store and Forward
Switching Capacity	20Gbps
Forwarding Rate	14.88Mpps
MAC	8K
Buffer Memory	2M
Twisted Pair	10BASE-T: Cat5 UTP (≤ 300 meter)
Transmission	100BASE-TX: Cat5 or later UTP (≤ 100 meter) 1000BASE-T: Cat5 or later UTP (≤ 100 meter)
Power Supply Pin	Default 1/2(+), 3/6(-);
MAX / AVERAGE Power Per Port	30W/15.4W
Total PWR / Input Voltage	120W (52VDC)
Power Consumption	Standby:<4W; Full load:<120W
LED Indicator	Power indicator: PWR (Green); Network indicator: 1-8(Link/Act)/ (Green),9-10(Link/Act)/ (Green); POE indicator: 1-8PoE (Orange)
Power Supply	External power adapter

Operation TEMP / Humidity	-20~+55° C;5%~90% RH non condensing
Storage TEMP / Humidity	-40~+75° C;5%~95% RH non condensing
Dimension	200*105*29mm
Net /Gross Weight	<1.8kg / <2.5kg
Installation Method	desktop type, wall mounted
Protection	IEC61000-4-2(ESD): ±8kV contact discharge, ±15kV air discharge IEC61000-4-5(Lightning protection/Surge): Power:CM ±4kV/DM ±2kV; Port: ±4kV
Protection Level	IP30
Certification	CCC; CE mark, commercial;CE/LVD EN60950; FCC Part 15 Class B;RoHS
Warranty	3 years, lifetime maintenance.

DIMENSION

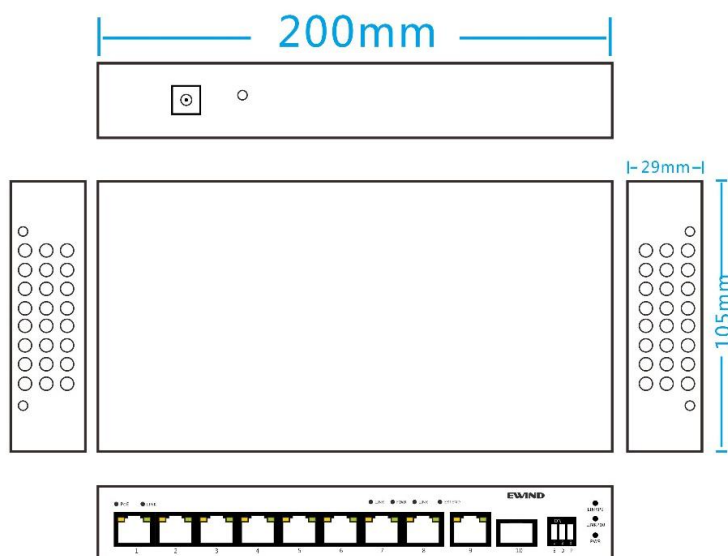

APPLICATION



PACKING LIST

CONTENT	QTY	UNIT
10 Ports Full Giga PoE Switch (EW-S1910CFG-DP)	1	SET
External Power Adapter (120W)	1	PC
User Guide	1	PC
Warranty Card	1	PC