

High Speed HDMI™ Kabel mit Ethernet

Hochgeschwindigkeitskabel für HD- und 3D-TV

Erleben Sie Filme und Spiele klar, hochauflösend und umwerfend, auch in 3D. Was dieses Kabel mit einem Audio-Video-Signal anstellt? Nichts. Aber das macht es sehr gut. Dank reiner Materialien, präziser Verarbeitung und moderner Technik verbindet es Ihren Fernseher mit weiteren Geräten und dem Internet. Wie es sich für eine anspruchsvolle Anlage gehört. So sind Sie sicher, dass Ihr Erlebnis so ankommt, wie es gedacht war.

- reine Kupferleiter und 2-fach Schirmung für klare Signalqualität
- High Speed HDMI™ für 3D und HDTV bis 4K (2160p)
- integrierter Ethernet-Kanal spart zusätzliche Netzwerk- oder Audiokabel
- 24-Karat vergoldete Kontakte für minimale Übertragungswiderstände

Technische Daten

Anschlüsse

Steckermaterial:	3-fach umspritztes PVC / ABS
Kontakmaterial:	24-Karat-vergoldet
Schirmung:	ja
Anschluss 1, Typ:	HDMI™ Stecker (Typ A)
Anschluss 1, Steckerlänge (mm):	42,1 (0,5-3 m) 47,3 (7,5-20 m)
Anschluss 1, Steckerbreite (mm):	20,4 (0,5-3 m) 20,9 (7,5-20 m)
Anschluss 1, Steckerhöhe (mm):	11,4 (0,5-20 m)
Anschluss 2, Typ:	HDMI™ Stecker (Typ A)
Anschluss 2, Steckerlänge (mm):	42,1 (0,5-3 m) 47,3 (7,5-20 m)
Anschluss 2, Steckerbreite (mm):	20,4 (0,5-3 m) 20,9 (7,5-20 m)
Anschluss 2, Steckerhöhe (mm):	11,4 (0,5-20 m)

Kabel

Typ:	Rundkabel
Länge (m):	0,5 1 1,5 2 3 5 7,5 10 15 20
Material Innenleiter:	OFC (sauerstofffreies Kupfer)
Durchmesser Innenleiter (mm):	1 x 0,250 (0,5-3 m) 1 x 0,410 (5 m) 1 x 0,200 (7,5-20 m)
AWG:	30 (0,5-3 m) 26 (5 m) 24 (7,5-20 m)
Anzahl Schirmungen:	2 x
Typ 1. Schirmung:	Aluminium-Folie
Typ 2. Schirmung:	Kupfer-Geflecht 112 Adern x 0,10 mm Querschnitt (0,5-3 m) Kupfer-Geflecht 160 Adern x 0,10 mm Querschnitt (5-20 m)
Material Außenmantel:	hochelastisches PVC
Durchmesser Außenmantel (mm):	6,0 (0,5-3 m) 8,0 (5 m) 9,5 (7,5-20 m)
Knickschutz:	beidseitig

Signalübertragung

Übertragungsarten:	digitale Audio- und Videosignale
max. Bandbreite (MHz):	340 (0,5-7,5 m) 195 (10 m) 75 (15-20 m)
max. Übertragungsrate (Gbit/s):	10,2 (0,5-7,5 m) 4,95 (10 m) 2,25 (15-20 m)
max. Auflösung:	4K (2160p) (0,5-7,5 m) Full HD (1080p) (10-20 m)
unterstützte Farbräume:	16/24 bit RGB/YUV, Deep Color, x.v.Color™
unterstützte Audiostandards:	Audio-Return Channel (ARC), Dolby Digital/Plus, Dolby TrueHD, DTS-HD Master Audio™, DVD-Audio, SA-CD
weitere unterstützte Standards:	HDMI™ Ethernet Channel (HEC), 3D, HDCP, CEC, 4K (2160i/p), Full HD (1080i/p), HD ready (720i/p), SDTV (480i/p)
Wellenwiderstand (Ω):	100


Allgemein

Betriebstemperatur von / bis (°C):	-10 / +80
Zertifizierung:	(ATC) Authorized Testing Centers 0,5-7,5 m: Hi Speed, 10-20 m: Standard
Garantie (Jahre):	10


clicktronic®

entertainment.
pure.


casual

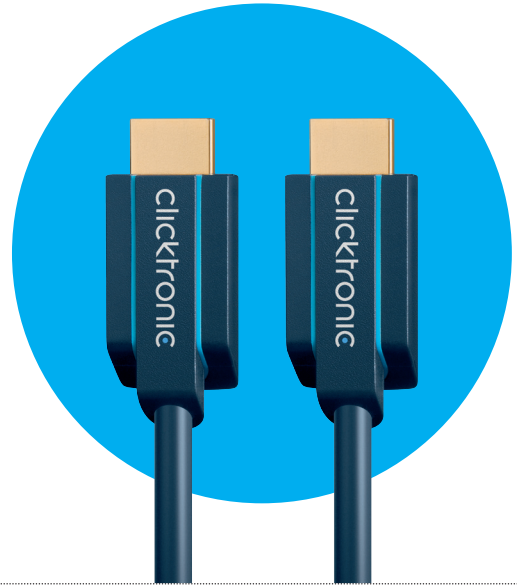

HDMI™ Stecker (Typ A) HDMI™ Stecker (Typ A)



Kabelquerschnitt



Schaltplan











Type A PIN	Signal Assignment	Type A PIN
1		1
2		2
3		3
4		4
5		5
6		6
7		7
8		8
9		9
10		10
11		11
12		12
14		14
17		17
19		19
13	CEC	13
15	SCL	15
16	SDA	16
18	+5 Volts Power	18

Designed in Germany 10 Years Warranty OFC 99,99% Oxygen Free Copper 24 Carat Gold Anti Resistance Connections 2x Cable Shielding

High Speed HDMI™ Kabel mit Ethernet

Hochgeschwindigkeitskabel für HD- und 3D-TV

clicktronic®
entertainment.
pure.

Artikelnr.	Kabellängen (m)	Verpackung (Maße in mm)	Gewicht (kg)	Abbildung	EAN Code
70300	0.50	Einzelkarton: 185 x 80 x 25 Export VPE (40 Stk.): 400 x 295 x 235	Einzelkarton: 0.08 Export VPE: 4.50		4 040849 703003
70301	1.00	Einzelkarton: 185 x 80 x 25 Export VPE (40 Stk.): 400 x 295 x 235	Einzelkarton: 0.10 Export VPE: 5.40		4 040849 703010
70302	1.50	Einzelkarton: 185 x 80 x 25 Export VPE (40 Stk.): 400 x 295 x 235	Einzelkarton: 0.13 Export VPE: 6.30		4 040849 703027
70303	2.00	Einzelkarton: 185 x 80 x 35 Export VPE (30 Stk.): 425 x 270 x 235	Einzelkarton: 0.15 Export VPE: 5.40		4 040849 703034
70304	3.00	Einzelkarton: 185 x 180 x 40 Export VPE (24 Stk.): 400 x 285 x 435	Einzelkarton: 0.25 Export VPE: 7.50		4 040849 703041
70305	5.00	Einzelkarton: 185 x 180 x 55 Export VPE (20 Stk.): 400 x 310 x 435	Einzelkarton: 0.52 Export VPE: 11.70		4 040849 703058
70306	7.50	Einzelkarton: 185 x 180 x 75 Export VPE (16 Stk.): 400 x 335 x 435	Einzelkarton: 0.95 Export VPE: 16.80		4 040849 703065
70307	10.00	Einzelkarton: 370 x 185 x 70 Export VPE (8 Stk.): 400 x 315 x 420	Einzelkarton: 1.35 Export VPE: 12.70		4 040849 703072
70309	15.00	Einzelkarton: 370 x 185 x 70 Export VPE (8 Stk.): 400 x 315 x 420	Einzelkarton: 1.83 Export VPE: 17.00		4 040849 703096
70310	20.00	Einzelkarton: 370 x 185 x 85 Export VPE (6 Stk.): 400 x 285 x 420	Einzelkarton: 2.45 Export VPE: 16.30		4 040849 703102

TARIC-Code: 85444290900

Bei Clicktronic® werden alle Kabel oberhalb einer Länge von 7,5 Metern gemäß der Testkriterien als Standard HDMI™-Kabel bezeichnet, auch wenn sie ursprünglich als High Speed HDMI™-Kabel ausgelegt wurden und ggf. auch über größere Distanzen eine deutliche Mehrleistung zeigen.

Alle enthaltenen Firmennamen und Produktbezeichnungen sind Warenzeichen der jeweiligen Inhaber. Alle Rechte vorbehalten. Bei HDMI™ handelt es sich um eine eingetragene Marke der HDMI Licensing L.L.C.

Der Inhalt kann von den Abbildungen abweichen. Druckfehler und Änderungen an Produkt, Verpackung oder Dokumentation behalten wir uns vor. Clicktronic®, Pilmannstraße 12, D-38112 Braunschweig

High Speed HDMI™ cable with Ethernet

high-speed cable for HD and 3D TV

Enjoy movies and games with high clarity, high resolution and dazzling quality, even in 3D. What does this cable do to an audio video signal? Nothing. It is, however, precisely this feature which proves its quality. Thanks to pure materials, precise processing, and modern technology, it combines your TV with other devices and the Internet. Just as befits a sophisticated system! Therefore, you can be sure that you get the experience exactly as it was meant to be.

- pure copper conductor and 2-way shielding for clear signal quality
- High Speed HDMI™ for 3D and HDTV up to 4K (2160p)
- integrated Ethernet channel saves additional network or audio cables
- 24-Karat gold plated contacts for minimum transfer resistances



Specifications

Connections	
Plug material:	triple-coated PVC / ABS
Contact material:	24-Karat gold plated
Shielding:	yes
Port 1, type:	HDMI™ connector (type A)
Connector 1, connector length (mm):	42.1 (0.5-3 m) 47.3 (7.5-20 m)
Connector 1, connector width (mm):	20.4 (0.5-3 m) 20.9 (7.5-20 m)
Connector 1, connector height (mm):	11.4 (0.5-20 m)
Port 2, type:	HDMI™ connector (type A)
Connector 2, connector length (mm):	42.1 (0.5-3 m) 47.3 (7.5-20 m)
Connector 2, connector width (mm):	20.4 (0.5-3 m) 20.9 (7.5-20 m)
Connector 2, connector height (mm):	11.4 (0.5-20 m)
cable	
Type:	Round cable
Length (m):	0.5 1 1.5 2 3 5 7.5 10 15 20
Inner conductor material:	OFC (Oxygen free copper)
Inner conductor diameter (mm):	1 x 0.250 (0.5-3 m) 1 x 0.410 (5 m) 7 x 0.200 (7.5-20 m)
AWG:	30 (0.5-3 m) 26 (5 m) 24 (7.5-20 m)
Number of shieldings:	2 x
Type of 1st shielding	Aluminium foil
Type of 2nd shielding	Copper braid 112 wires x 0.10 mm cross section (0.5-3 m) Copper braid 160 wires x 0.10 mm cross section (5-20 m)
Outer sheath material:	highly elastic PVC
Outer sheath diameter (mm):	6.0 (0.5-3 m) 8.0 (5 m) 9.5 (7.5-20 m)
Kink protection:	on both sides
Signal transmission	
Transmission modes:	digital audio and video signals
max. Bandwidth (MHz):	340 (0.5-7.5 m) 195 (10 m) 75 (15-20 m)
max. Transfer rate (Gb / s)	10.2 (0.5-7.5 m) 4.95 (10 m) 2.25 (15-20 m)
max. Resolution:	4K (2160p) (0.5-7.5 m) Full HD (1080p) (10-20 m)
Supported color spaces:	16/24 bit RGB/YUV, Deep Color, x.v.Color™
Supported audio standards:	Audio-Return Channel (ARC), Dolby Digital/Plus, Dolby TrueHD, DTS-HD Master Audio™, DVD-Audio, SA-CD
Other supported standards:	HDMI™ Ethernet Channel (HEC), 3D, HDCP, CEC, 4K (2160i/p), Full HD (1080i/p), HD ready (720i/p), SDTV (480i/p)
Characteristic impedance (Ω):	100
General	
Operating temperature from / to (°C):	-10 / +80
Certification::	(ATC) Authorized Testing Centers 0.5-7.5 m Hi-Speed 10-20 m Standard
Warranty (years):	10


clicktronic®

entertainment.
pure.

casual

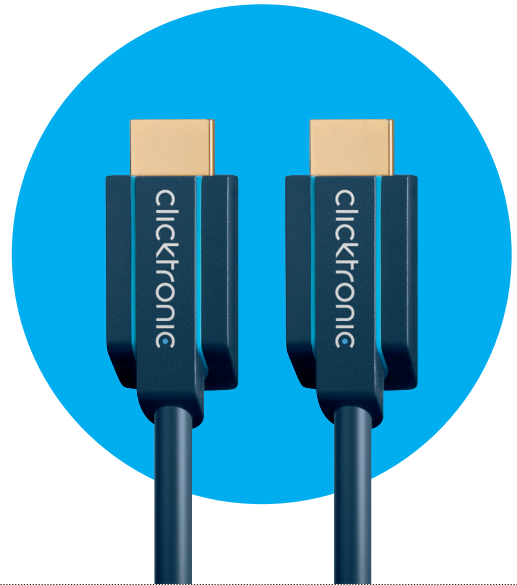

Cross section



Wiring diagram

Type A PIN	Signal Assignment	Type A PIN
1	[Wiring diagram for pins 1-3]	1
2		2
3		3
4	[Wiring diagram for pins 4-6]	4
5		5
6		6
7	[Wiring diagram for pins 7-9]	7
8		8
9		9
10	[Wiring diagram for pins 10-12]	10
11		11
12		12
14	[Wiring diagram for pins 14-16]	14
17		17
19		19
13	CEC	13
15	SCL	15
16	SDA	16
18	+5 Volts Power	18











● ● ● **10 Years Warranty** **OFC** **24 Carat Gold** **2x**
 Designed in Germany High-Quality Assurance 99.99% Oxygen Free Copper Anti Resistance Connections Cable Shielding

High Speed HDMI™ cable with Ethernet

high-speed cable for HD and 3D TV

clicktronic®

entertainment.
pure.

Article no.	Cable lengths (m)	Packaging dimensions (mm)	Weight (kg)	Figure	EAN Code
70300	0.50	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: 0.08 Master carton: 4.50		4 040849 703003
70301	1.00	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: 0.10 Master carton: 5.40		4 040849 703010
70302	1.50	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: 0.13 Master carton: 6.30		4 040849 703027
70303	2.00	Single carton: 185 x 80 x 35 Master carton (30 pcs.): 425 x 270 x 235	Single carton: 0.15 Master carton: 5.40		4 040849 703034
70304	3.00	Single carton: 185 x 180 x 40 Master carton (24 pcs.): 400 x 285 x 435	Single carton: 0.25 Master carton: 7.50		4 040849 703041
70305	5.00	Single carton: 185 x 180 x 55 Master carton (20 pcs.): 400 x 310 x 435	Single carton: 0.52 Master carton: 11.70		4 040849 703058
70306	7.50	Single carton: 185 x 180 x 75 Master carton (16 pcs.): 400 x 335 x 435	Single carton: 0.95 Master carton: 16.80		4 040849 703065
70307	10.00	Single carton: 370 x 185 x 70 Master carton (8 pcs.): 400 x 315 x 420	Single carton: 1.35 Master carton: 12.70		4 040849 703072
70309	15.00	Single carton: 370 x 185 x 70 Master carton (8 pcs.): 400 x 315 x 420	Single carton: 1.83 Master carton: 17.00		4 040849 703096
70310	20.00	Single carton: 370 x 185 x 85 Master carton (6 pcs.): 400 x 285 x 420	Single carton: 2.45 Master carton: 16.30		4 040849 703102

TARIC Code: 85444290900

At Clicktronic® cables are designated as standard HDMI™ cables above a length of 7.5 meters, according to the test criteria, even if they originally are designed as High Speed HDMI™ cables and mostly show a significant power increase over long distances.

All company and product names are trademarks of their respective owners. All rights reserved. HDMI™ is a registered trademark of HDMI Licensing L.L.C.

The content may differ from those shown. We reserve the right for printing errors and changes to product packaging or documentation.
Clicktronic®, Pillmannstraße 12, D-38112 Braunschweig/Germany