


Ruijie Reyee RG-EG Series Routers

ReyeeOS 2.342 Configuration Guide

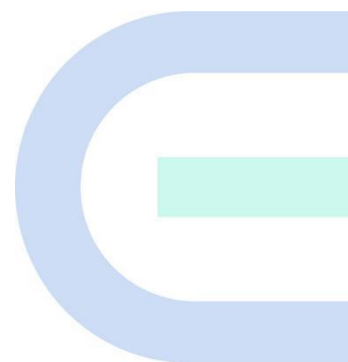

Copyright

Copyright © 2025 Ruijie Networks

All rights are reserved in this document and this statement.

Any reproduction, excerpt, backup, modification, transmission, translation, or commercial use of this document or any portion of this document, in any form or by any means, without the prior written consent of Ruijie Networks is prohibited.



and other Ruijie networks logos are trademarks of Ruijie Networks.

All other trademarks or registered trademarks mentioned in this document are owned by their respective owners.

Disclaimer

The products, services, or features you purchase are subject to commercial contracts and terms, and some or all of the products, services, or features described in this document may not be available for you to purchase or use. Except for the agreement in the contract, Ruijie Networks makes no explicit or implicit statements or warranties with respect to the content of this document.

The names, links, descriptions, screenshots, and any other information regarding third-party software mentioned in this document are provided for your reference only. Ruijie Networks does not explicitly or implicitly endorse or recommend the use of any third-party software and does not make any assurances or guarantees concerning the applicability, security, or legality of such software. You should choose and use third-party software based on your business requirements and obtain proper authorization. Ruijie Networks assumes no liability for any risks or damages arising from your use of third-party software.

The content of this document will be updated from time to time due to product version upgrades or other reasons. Ruijie Networks reserves the right to modify the content of the document without any notice or prompt.

This manual is designed merely as a user guide. Ruijie Networks has tried its best to ensure the accuracy and reliability of the content when compiling this manual, but it does not guarantee that the content of the manual is completely free of errors or omissions, and all the information in this manual does not constitute any explicit or implicit warranties.

Preface

Intended Audience

This document is intended for:

- Network engineers
- Technical support and servicing engineers
- Network administrators

Technical Support

- Ruijie Reye website: <https://reyee.ruijie.com>
- Online support center: <https://reyee.ruijie.com/en-global/support>
- Case portal: <https://www.ruijie.com/support/caseportal>
- Community: <https://community.ruijie.com>
- Email support: service_rj@ruijie.com
- Live chat: <https://reyee.ruijie.com/en-global/rita>

Conventions

1. GUI Symbols

Interface symbol	Description	Example
Boldface	1. Button names 2. Window names, tab name, field name and menu items 3. Link	1. Click OK . 2. Select Config Wizard . 3. Click the Download File link.
>	Multi-level menus items	Select System > Time .

2. Signs

The signs used in this document are described as follows:



Warning

An alert that calls attention to important rules and information that if not understood or followed can result in data loss or equipment damage.



Caution

An alert that calls attention to essential information that if not understood or followed can result in function failure or performance degradation.



Note

An alert that contains additional or supplementary information that if not understood or followed will not lead to serious consequences.

 Specification

An alert that contains a description of product or version support.

3. Note

The manual offers configuration information (including model, description, port type, software interface) for indicative purpose only. In case of any discrepancy or inconsistency between the manual and the actual version, the actual version prevails.

Contents

Preface	I
1 Change Description.....	1
1.1 ReyeeOS 2.342	1
1.1.1 Hardware Change.....	1
1.1.2 Software Feature Changes.....	1
2 Login.....	2
2.1 Configuration Environment Requirements	2
2.1.1 PC	2
2.2 Default Configuration	2
2.3 Login to Web Interface.....	2
2.3.1 Connecting to the Router.....	2
2.3.2 Configuring the IP Address of the Management Client	2
2.3.3 Login	3
2.3.4 Frequently-Used Controls on the Web Page.....	4
2.4 Work Mode.....	5
2.4.1 Router Mode	5
2.4.2 AC Mode	5
2.5 Configuration Wizard (Router Mode).....	5
2.5.1 Getting Started.....	5
2.5.2 Configuration Steps	6
2.5.3 Forgetting the PPPoE Account	7
2.6 Configuration Wizard (AC Mode).....	8
2.6.1 Getting Started.....	8

2.6.2 Configuration Steps	8
2.7 Switching the Work Mode	9
3 Network-Wide Monitoring.....	12
3.1 Viewing Networking Information	12
3.2 Adding Networking Devices.....	15
3.2.1 Wired Connection	15
3.2.2 AP Mesh.....	16
3.3 Configuring the Service Network.....	19
3.3.1 Configuring the Wired Network.....	19
3.3.2 Configuring the Wireless Network	21
3.4 Supporting Traffic Monitoring	24
3.4.1 Viewing Real-Time Traffic	24
3.4.2 Viewing Historical Traffic.....	28
3.5 Supporting the URL Logging Function	31
3.6 Processing Alerts	32
4 Network Settings	34
4.1 Switching the Work Mode	34
4.1.1 Work Mode.....	34
4.1.2 Self-Organizing Network Discovery	34
4.1.3 Configuration Steps	34
4.2 Port Settings	35
4.2.1 Setting the Port Parameters	35
4.2.2 Viewing the Port Information.....	37
4.3 Configuring the WAN Ports	37

4.3.1 Configuring the Internet Access Mode.....	37
4.3.2 Modifying the MAC Address	38
4.3.3 Modifying the MTU.....	39
4.3.4 Configuring the Private Line	40
4.3.5 Configuring the VLAN Tag	41
4.3.6 Configuring NAT Mode.....	41
4.3.7 Configuring the Multi-Line Load Balancing Mode	42
4.3.8 Configuring Link Detection.....	47
4.3.9 Configuring Data Plan.....	50
4.4 Configuring Speed Test.....	52
4.5 Configuring the LAN Ports.....	52
4.5.1 Modifying the LAN Port IP Address	52
4.5.2 Modifying the MAC Address	53
4.6 Configuring VLAN	54
4.6.1 VLAN Overview.....	54
4.6.2 Creating a VLAN	55
4.6.3 Configuring a Port VLAN	56
4.7 Configuring DNS.....	57
4.7.1 Local DNS.....	57
4.7.2 DNS Policy	57
4.7.3 DNS Proxy	59
4.8 Configuring IPv6	59
4.8.1 IPv6 Overview.....	59
4.8.2 IPv6 Basics	60

4.8.3 IPv6 Address Allocation Modes	60
4.8.4 Enabling the IPv6 Function.....	61
4.8.5 Configuring an IPv6 Address for the WAN Interface	61
4.8.6 Configuring an IPv6 Address for the LAN Port.....	62
4.8.7 Viewing the DHCPv6 Client.....	64
4.8.8 Configuring the Static DHCPv6 Address	65
4.8.9 Configuring the IPv6 Neighbor List.....	65
4.9 Configuring a DHCP Server	66
4.9.1 DHCP Server Overview	66
4.9.2 Address Allocation Mechanism.....	66
4.9.3 Configuring the DHCP Server.....	67
4.9.4 Viewing the DHCP Client.....	69
4.9.5 Configuring Static IP Addresses	69
4.10 Configuring Routes	71
4.10.1 Configuring Static Routes	71
4.10.2 Configuring PBR	73
4.10.3 Configuring RIP.....	81
4.10.4 Configuring RIPng	88
4.10.5 OSPFv2.....	93
4.10.6 OSPFv3.....	103
4.10.7 Viewing Routing Tables	112
4.10.8 Setting URL Routes	112
4.10.9 Configuring BGP Routes	114
4.11 Configuring ARP Binding and ARP Guard	126

4.11.1 Overview	126
4.11.2 Configuring ARP Binding	126
4.11.3 Configuring ARP Guard.....	127
4.12 Configuring MAC Address Filtering	128
4.12.1 Overview	128
4.12.2 Configuration Steps	128
4.13 Port Mapping.....	129
4.13.1 Overview	129
4.13.2 Getting Started.....	129
4.13.3 Configuration Steps	129
4.13.4 Verification and Test.....	131
4.13.5 Solution to Test Failure	131
4.13.6 Configuration Steps (DMZ).....	131
4.14 UPnP.....	133
4.14.1 Overview	133
4.14.2 Configuring UPnP	133
4.14.3 Verifying Configuration.....	134
4.15 Dynamic DNS	134
4.15.1 Overview	134
4.15.2 Getting Started.....	134
4.15.3 Configuring DDNS	134
4.16 Connecting to IPTV.....	137
4.16.1 Getting Started.....	137
4.16.2 Configuration Steps (VLAN Type)	137

4.16.3 Configuration Steps (IGMP Type)	138
4.17 Limiting the Number of Connections	139
4.18 Configuring Local Security	141
4.18.1 Configuring an Admin IP Address	141
4.18.2 Configuring Security Zones	143
4.18.3 Configuring Session Attack Prevention	145
4.18.4 Checking the Security Log	147
4.19 Configuring TTL Rules	148
4.19.1 Overview	148
4.19.2 Configuring TTL Rules	148
4.20 Disk Management	150
4.20.1 Configuring Local Storage Settings	150
4.20.2 Configuring External Storage Settings	151
4.20.3 Configuring Log Settings	152
4.21 Audit Log Reports	152
4.21.1 NAT Log	152
4.21.2 Authentication Log	153
4.21.3 DHCP Log	154
4.22 Configuring Audit Log	155
4.23 Other Settings	157
5 AP Management	159
5.1 Configuring AP Groups	159
5.1.1 Overview	159
5.1.2 Configuration Steps	159

5.2 Configuring Wi-Fi	160
5.2.1 Adding a Wi-Fi Network	160
5.2.2 Configuring Guest Wi-Fi	165
5.2.3 Managing Wi-Fi Networks.....	165
5.3 Healthy Mode.....	167
5.4 RF Settings	167
5.5 Configuring Wi-Fi Blocklist or Allowlist	169
5.5.1 Overview	169
5.5.2 Configuring a Global Blocklist/Allowlist	170
5.5.3 Configuring an SSID-based Blocklist/Allowlist	170
5.6 Configuring AP Load Balancing.....	171
5.6.1 Overview	171
5.6.2 Configuring Client Load Balancing	171
5.6.3 Configuring Traffic Load Balancing.....	173
5.7 Configuring Wireless Rate Limiting	174
5.7.1 Overview	174
5.7.2 Configuration Steps	175
5.8 Wireless Network Optimization.....	178
5.8.1 One-Click Wireless Optimization	178
5.8.2 Scheduled Wireless Optimization.....	181
5.8.3 Wi-Fi Roaming Optimization (802.11k/v)	182
5.9 Reye Mesh Settings.....	183
5.10 Configuring the LAN Port of Downlink Access Point.....	184
5.11 Configuring Domain Proxy.....	185

5.12 Client Association	186
5.12.1 Configuring Intelligent Association.....	186
5.12.2 Configuring Client Association.....	186
6 Switch Management.....	188
6.1 Configuring RLDLP	188
6.1.1 Overview	188
6.1.2 Configuration Steps	188
6.2 Configuring DHCP Snooping.....	189
6.2.1 Overview	189
6.2.2 Configuration Steps	190
6.3 Batch Configuring Switches.....	191
6.3.1 Overview	191
6.3.2 Configuration Steps	191
6.3.3 Verifying Configuration.....	193
7 Firewall Management.....	194
7.1 Viewing Firewall Information.....	194
7.2 Configuring Firewall Port	195
8 Authentication Management	196
8.1 Web Authentication.....	196
8.1.1 Overview	196
8.1.2 Getting Started.....	196
8.1.3 WiFiDog Authentication	196
8.1.4 Configuring Third-Party Authentication.....	198
8.1.5 Local Account Authentication.....	204

8.1.6 Authorized Guest Authentication	210
8.1.7 Guest Authentication through QR Code Scanning	212
8.1.8 Authentication-Free	214
8.1.9 Custom Portal Page	217
8.1.10 Global Configuration	218
8.2 Configuring the PPPoE Server	218
8.2.1 Overview	218
8.2.2 Global Settings	219
8.2.3 Configuring the PPPoE User Groups	220
8.2.4 Configuring a PPPoE User Account	221
8.2.5 Configuring Exceptional IP Addresses	223
8.3 Online User Management	224
9 Online Behavior Management	225
9.1 Overview	225
9.2 User Management	225
9.2.1 Overview	225
9.2.2 User Group	225
9.2.3 Authentication Group	228
9.3 Time Management	230
9.3.1 Configuring a Schedule by Week	230
9.3.2 Configuring a Schedule by Date	231
9.4 App Control	232
9.4.1 Overview	232
9.4.2 Configuring App Control	232

9.4.3 Custom App	234
9.4.4 Custom Application Group	236
9.5 Website Management.....	237
9.5.1 Overview	237
9.5.2 Configuration Steps	237
9.6 QoS	240
9.6.1 Overview	240
9.6.2 Smart QoS	240
9.6.3 Custom Policies	241
9.6.4 Application Priority	250
9.7 Access Control.....	252
9.7.1 Overview	252
9.7.2 Configuration Steps	252
9.8 Clients Management.....	258
9.8.1 Managing Online Clients.....	258
9.8.2 Managing Client Groups	260
9.8.3 Upgrading a Client Application Library	263
9.9 Upgrading the Application Library	263
9.9.1 Overview	263
9.9.2 Local Upgrade.....	264
9.9.3 Online Upgrade.....	264
9.10 Network Behavior Settings	264
9.10.1 Internet Alert.....	264
9.10.2 Online Time Control	266

9.10.3 Internet Block Policy	266
10 Online Client Management	267
10.1 Overview	267
10.2 Configuring Client IP Binding.....	268
10.3 Configuring Client Access Control.....	269
10.4 Configuring Client Association.....	270
10.5 Blocking Clients	271
10.6 Configuring Client Rate Limiting	272
11 VPN	275
11.1 Configuring IPsec VPN	275
11.1.1 Overview	275
11.1.2 Configuring the IPsec Server	275
11.1.3 Configuring the IPsec Client	282
11.1.4 Setting WAN Interface Priority	285
11.1.5 Viewing the IPsec Connection Status	287
11.1.6 Typical Configuration Example	288
11.1.7 Solution to IPsec VPN Connection Failure	291
11.2 Configuring L2TP VPN	292
11.2.1 Overview	292
11.2.2 Configuring the L2TP Server	292
11.2.3 Configuring the L2TP Client.....	299
11.2.4 Viewing the L2TP Tunnel Information.....	301
11.2.5 Typical Configuration Example	302
11.2.6 Solution to L2TP VPN Connection Failure.....	313

11.3 Configuring PPTP VPN	313
11.3.1 Overview	313
11.3.2 Configuring the PPTP Service	313
11.3.3 Configuring the PPTP Client	317
11.3.4 Viewing the PPTP Tunnel Information	318
11.3.5 Typical Configuration Example	319
11.3.6 Solution to PPTP VPN Connection Failure	328
11.4 Configuring OpenVPN	329
11.4.1 Overview	329
11.4.2 Configuring the OpenVPN Server	329
11.4.3 Configuring the OpenVPN Client	334
11.4.4 Viewing the OpenVPN Tunnel Information	339
11.4.5 Typical Configuration Example	339
11.5 Configuring WireGuard VPN	347
11.5.1 Overview	347
11.5.2 Configuring the WireGuard VPN Server	347
11.5.3 Configuring a WireGuard VPN Client	352
11.5.4 Checking the Status of a WireGuard VPN Connection	355
12 SD-WAN	357
13 System Management	358
13.1 System Logs	358
13.1.1 Viewing System Logs	358
13.1.2 Configuring System Logs	360
13.2 Setting the Login Password	365

13.3 Setting the Session Timeout Duration.....	365
13.4 Restoring Factory Settings	366
13.4.1 Restoring the Current Device to Factory Settings.....	366
13.4.2 Restoring All Devices to Factory Settings	366
13.5 Configuring SNMP	367
13.5.1 Overview	367
13.5.2 Global Configuration	367
13.5.3 View/Group/Community/User Access Control.....	369
13.5.4 SNMP Service Typical Configuration Examples.....	377
13.5.5 Configuring Trap Service	382
13.5.6 Trap Service Typical Configuration Examples.....	386
13.6 Configure IEEE 802.1X authentication.....	389
13.6.1 Overview	389
13.6.2 Configuring 802.1X Globally	389
13.6.3 Configuring the RADIUS Server	392
13.6.4 Checking Authentication User List.....	394
13.7 Configuring Reboot.....	395
13.7.1 Rebooting the Current Device	395
13.7.2 Rebooting All Devices in the Network	395
13.7.3 Rebooting the Specified Device	396
13.8 Configuring Scheduled Reboot.....	396
13.9 Setting and Displaying System Time.....	397
13.10 Configuring Backup and Import.....	398
13.11 Configuring LEDs.....	398

13.12 Configuring Diagnostics.....	400
13.12.1 Network Check.....	400
13.12.2 Alerts	400
13.12.3 Network Tools	401
13.12.4 Packet Capture	404
13.12.5 Fault Collection	405
13.12.6 Viewing Flow Statistics	405
13.13 Performing Upgrade and Checking System Version	406
13.13.1 Online Upgrade.....	406
13.13.2 Local Upgrade.....	406
13.14 Switching System Language	407
13.15 Configuring Cloud Service.....	408
13.15.1 Overview	408
13.15.2 Configuration Steps	408
13.15.3 Unbinding Cloud Service	409
14 FAQs	411
14.1 Login Failure	411
14.2 Password Loss/Factory Setting Restoration	411
14.3 Internet Access Failure	411

1 Change Description

This chapter describes the major changes in software and hardware of different versions and related documentation. For details about hardware changes, see the release notes published with software versions.

1.1 ReyeeOS 2.342

1.1.1 Hardware Change

The following table lists the applicable hardware models of this version.

Model	Hardware Version
RG-EG710XS	1.xx
RG-EG406XS	1.xx
RG-EG406XS-P	1.xx

1.1.2 Software Feature Changes

Compared with ReyeeOS 2.340, this version has no software feature changes.

2 Login

2.1 Configuration Environment Requirements

2.1.1 PC

- Browser: Google Chrome, Internet Explorer 9.0, 10.0, and 11.0, and some Chromium/Internet Explorer kernel-based browsers (such as 360 Extreme Explorer) are supported. Exceptions such as garble or format error may occur if an unsupported browser is used.
- Resolution: 1024 x 768 or a higher resolution is recommended. If other resolutions are used, the page fonts and formats may not be aligned, the GUI is less artistic, or other exceptions may occur.

2.2 Default Configuration

Table 2-1 Default Web Configuration

Item	Default
IP address	192.168.110.1
Password	The default password is "admin".

2.3 Login to Web Interface

2.3.1 Connecting to the Router

You can open the management page and complete Internet access configuration only after connecting a client to the router in either of the following ways:

- Wired Connection

Connect a local area network (LAN) port of the router to the network port of the PC, and set the IP address of the PC. For details, see Section [2.3.2 Configuring the IP Address of the Management Client](#).

- Wireless Connection

Connect the LAN port to the uplink port on the AP and power on the AP. On a mobile phone or laptop, search for wireless network @Ruijie-mXXXX (XXXX is the last four digits of the MAC address of each device). In this mode, you do not need to set the IP address of the management client, and you can skip the operation in Section [2.3.2 Configuring the IP Address of the Management Client](#).

2.3.2 Configuring the IP Address of the Management Client

Configure an IP address for the management client in the same network segment as the default IP address of the device (The default device IP address is 192.168.110.1, and the subnet mask is 255.255.255.0.) so that the management client can access the device. For example, set the IP address of the management client to 192.168.110.200.

2.3.3 Login

Enter the IP address (192.168.110.1 by default) of the router in the address bar of the browser to open the login page.

Note

If the static IP address of the device is changed, or the device obtains a new dynamic IP address, the new IP address can be used to access the web management system of the device as long as the management client and the device are in the same network segment of a LAN.

- (1) On the web page, enter the password and click **Log In** to enter the web management system.

The image shows the login page for a Ruijie Reyee EG710XS router. The page has a blue border. At the top, the 'Ruijie | Reyee' logo is displayed. Below the logo is a small image of the router with the letter 'R' and five asterisks. Underneath the image, the model number 'EG710XS' is shown. There is a password input field with the placeholder text 'Password' and a toggle icon for visibility. Below the password field is a checkbox with the text 'I have read and agreed User Agreement and Reyee Data Processing Agreement.' Below the checkbox is a large blue 'Log In' button. At the bottom right of the login area is a link that says 'Forgot Password' with a question mark icon. At the very bottom of the page, within the blue border, is a footer that reads: 'Google Chrome and Internet Explorer browser 9, 10 or 11 are supported. Copyright©2000-2025 Ruijie Networks Co., Ltd.'

You can use the default password **admin** to log in to the device for the first time.

For security purposes, you are advised to change the default password as soon as possible after logging in, and to regularly update your password thereafter.







If you forget the IP address or password, hold down the **Reset** button on the device panel for more than 5 seconds when the device is connected to the power supply to restore factory settings. After restoration, you can use the default IP address and password to log in.



Caution

Restoring factory settings will delete the existing configuration and you are required to configure the device again at your next login. Therefore, exercise caution when performing this operation.

2.3.4 Frequently-Used Controls on the Web Page

Table 2-2 Frequently-Used Controls on the Web Page

Control	Description
	Monitor: Click it to view the topology of the self-organizing network and monitor device traffic trend, client traffic usage, device port status, and so on. Config: Click it to configure all functions available on the local device.
	Click it to search or select features for quick configuration.
	The navigation bar is arranged horizontally on the top when the device acts as the slave device, and vertically on the left when the device acts as the master device.
	Click it to access the alert list.
	Click it to change the language.
	Click it to log out of the web management system.
	Click it to connect the device to the cloud by scanning the QR code for remote management.
	Click Add or Batch Add to add one or more table entries in the dialog box that appears. After adding the table entries, you can view the added table entries on this page.
	Click it to delete the selected table entries in batches.
	Quickly locate the table entry you want to find through the drop-down list or by entering a keyword.
	Click them to edit, delete, or bind a table entry.
	If the toggle switch is displayed in gray and the button is on the left, the related function is disabled. If the toggle switch is displayed in blue and the button is on the right, the related function is enabled.

Control	Description
	Update data on the current page.
	Set the number of table entries displayed on a page. Click a page number or specify the page number to access the corresponding page.

2.4 Work Mode

The device can work in router mode and AC mode. The system menu pages and configuration function scope vary depending on the work mode. By default, the EG router works in router mode. To modify the work mode, see Section [4.1 Switching the Work Mode](#).

2.4.1 Router Mode

The device supports routing functions such as route-based forwarding and network address translation (NAT), VPN, and behavior management. It can allocate addresses to downlink devices, forward network data based on routes, and perform NAT operations.

In the router mode, the device can access the network through Point-to-Point Protocol over Ethernet (PPPoE) dialing, dynamic IP address, and static IP address. It can also directly connect to a fiber-to-the-home (FTTH) network cable or an uplink device to provide network access and manage downlink devices.

2.4.2 AC Mode

The device supports Layer 2 forwarding only. The device does not provide the routing and Dynamic Host Configuration Protocol (DHCP) server functions. By default, the WAN interface obtains IP addresses through DHCP. The AC mode is applicable to the scenario where the network is working normally. In AC mode, the device serves as the management controller to access the network in bypass mode and manage the AP.

2.5 Configuration Wizard (Router Mode)

2.5.1 Getting Started

- (1) Power on the device. Connect the WAN interface of the device to an uplink device using an Ethernet cable, or connect the device to the optical modem directly.
- (2) Configure the Internet connection type according to requirements of the local Internet Service Provider (ISP). Otherwise, the Internet access may fail due to improper configuration. You are advised to contact your local ISP to confirm the Internet connection type:
 - o Figure out whether the Internet connection type is PPPoE, DHCP mode, or static IP address mode.
 - o In the PPPoE mode, a username, a password, and possibly a service name are needed.
 - o In the static IP address mode, an IP address, a subnet mask, a gateway, and a DNS server need to be configured.

2.5.2 Configuration Steps

1. Adding a Device to Network

You can manage and configure all devices in the network in batches by default. Please verify the device count and network status before configuration.


Note

New devices will join in a network automatically after being powered on. You only need to verify the device count.

If a new device is detected not in the network, click **Add to My Network** and enter its management password to add the device manually.

Note

If there is a firewall device in the network, the **Firewall Port Config** page appears. Select the corresponding port for configuration.

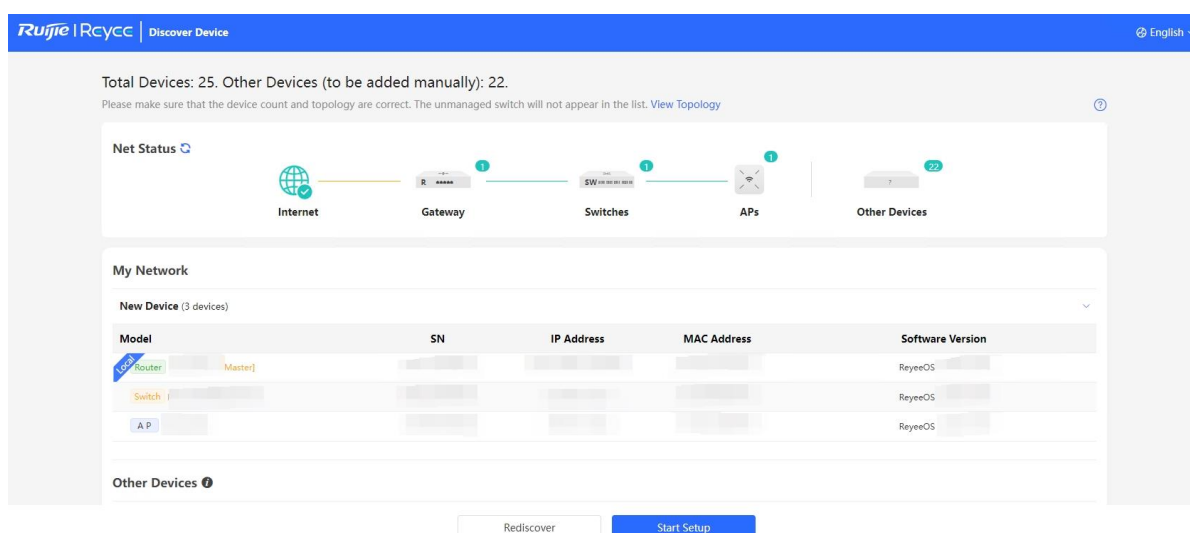

2. Creating a Network Project

(1) Click **Start Setup** to configure the Internet connection type and management password.

Note

Parameters displayed on the **Network Settings** page vary according to device types on the network. The following parameters are displayed when the network contains gateways, switches, and APs.

- **Internet:** Configure the Internet connection type according to the requirements of the local ISP.
 - **DHCP:** The router detects whether it can obtain an IP address via DHCP by default. If the router connects to the Internet successfully, you can click **Next** without entering an account.
 - **PPPoE:** Click **PPPoE**, and enter the username, password, and service name. Click **Next**.

- **Static IP:** Enter the IP address, subnet mask, gateway, and DNS server, and click **Next**.
- **Country/Region:** You are advised to select the actual country or region.
- **Time Zone:** Set the system time. The network time server is enabled by default to provide the time service. You are advised to select the actual time zone.
- **Network Name:** Identify the network where the device is located.
- **Management Password:** The password is used for logging in to the management page.

The first screenshot shows the 'Network Settings' step (1) of the configuration wizard. It includes a progress bar with three steps: 1. Network Settings, 2. Project Settings, and 3. Project Binding. Under 'Internet', there are radio buttons for PPPoE, DHCP (selected), and Static IP. Below this, it says 'Current Settings: DHCP'. A dashed line separates this from the 'Country/Region/Time Zone' section. There are two dropdown menus: '* Country/Region' set to 'United States (US)' and '* Time Zone' set to '(GMT-5:00)America/New_York'.

The second screenshot shows the 'Project Settings' step (2). The progress bar now highlights step 2. The 'Project Name' field contains 'EG310G'. Below it, there are radio buttons for 'Password' with options 'Use Old Management Password' (selected) and 'Edit'.

(2) Click **Create Network & Connect**. The device will deliver the initialization and check the network connectivity. The device can access the Internet now. Bind the device with a Ruijie Cloud account for remote management. Follow the instruction to log in to Ruijie Cloud for further configuration.

Note

- If your device is not connected to the Internet, click **Service is unavailable** in the displayed **Internet connection failed** dialog box to exit the configuration wizard.
- Please log in again with the new password if you change the management password.

2.5.3 Forgetting the PPPoE Account

- (1) Consult your local ISP.
- (2) If you replace the old router with a new one, click **Obtain Account from Old Device**. Connect the old and new routers to a power supply and start them. Insert one end of an Ethernet cable into the WAN interface of the old router and connect the other end to a LAN port of the new router, and click **Obtain**. The new router automatically fetches the PPPoE account of the old router. Click **Save** to make the configuration take effect.

Internet ☒ PPPoE ☐ DHCP ☐ Static IP

✳️ Checking IP assignment

* Username

* Password 

Service Name

🔔 Forgot Account? [Obtain Account from Old Device](#)

* SSID

Wi-Fi Password ☒ Security ☐ Open

Obtain PPPoE Account from Old Router



Steps:

1. Transmit Power on the old router and new router.
2. Connect one end of a cable to the WAN port of the old router and connect the other end to the LAN port of the new router.
3. Click "Obtain".

Obtain

2.6 Configuration Wizard (AC Mode)

2.6.1 Getting Started

- Power on the device and connect the device to an uplink device.
- Make sure that the device can access the Internet.

2.6.2 Configuration Steps

- (1) On the work mode setting page, change the work mode from router mode to AC mode. For details, see Section [4.1 Switching the Work Mode](#).

Working Mode



Description:

1. The device IP address may change upon mode change.
2. Change the endpoint IP address and ping the device.
3. Enter the new IP address into the address bar of the browser to access Eweb.
4. The system menu varies with different work modes.
5. The device will be restored and rebooted up on mode change.

Working Mode ?

AC

Self-Organizing Network ? ☒


Cancel

Save

- (2) After mode switching, the device will restart. After restart, the WAN interface on the device obtains an IP address through DHCP and accesses the network by using a dynamic IP address. The default Internet connection type is DHCP mode. You can use the default value or manually configure a static IP address for the WAN interface. For details, see Section [2.5.2 Configuration Steps](#).

2.7 Switching the Work Mode


When the self-organizing network discovery function is disabled, which is enabled by default, the web interface will switch to the local device mode. For details, see Section [4.1 Switching the Work Mode](#).

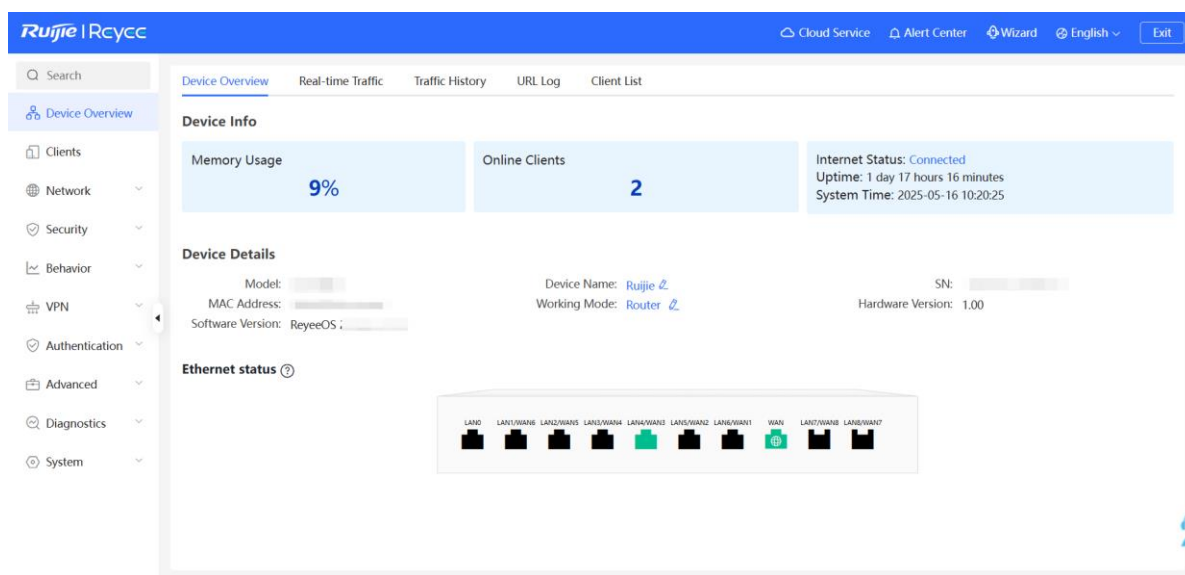

When the self-organizing network discovery function is enabled, you can switch the web interface between network-wide mode and local device mode.


- Network-wide mode: You can view and configure all devices on the network from a network perspective.

Click **Workspace** in the left navigation bar to access the corresponding functions for network-wide configuration in the secondary menu.

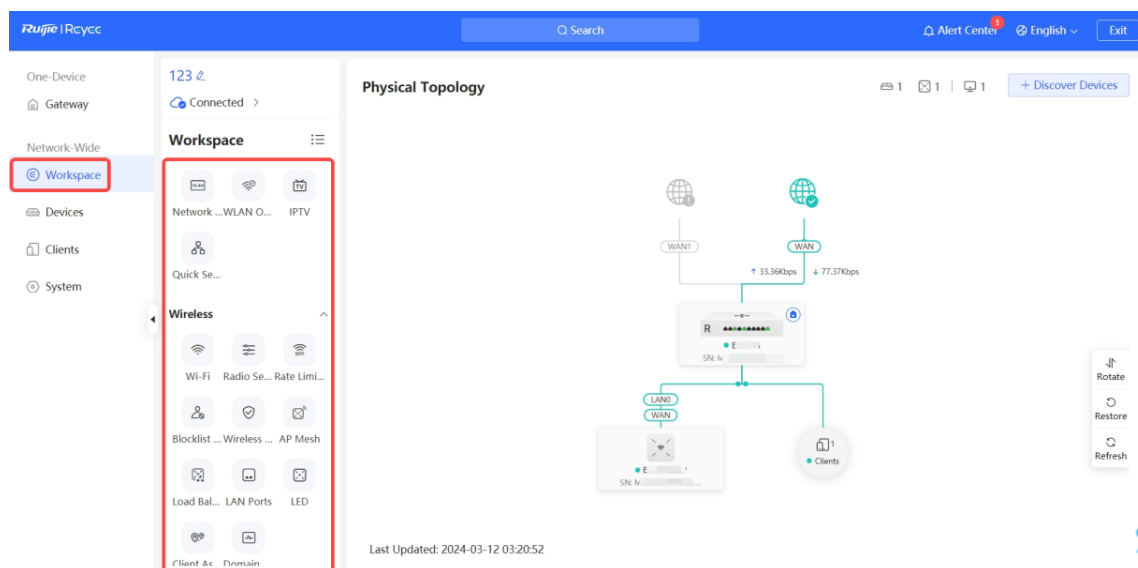

- Local device mode: You can configure only one device on the network. The configuration and management of an individual device can be accessed as follows:

- Method 1: Choose **Gateway** > **Config** under the **One-Device** menu. On the displayed page, you can access the corresponding functions for single-device configuration in the secondary menu. This method only supports configuring gateway devices on the network.

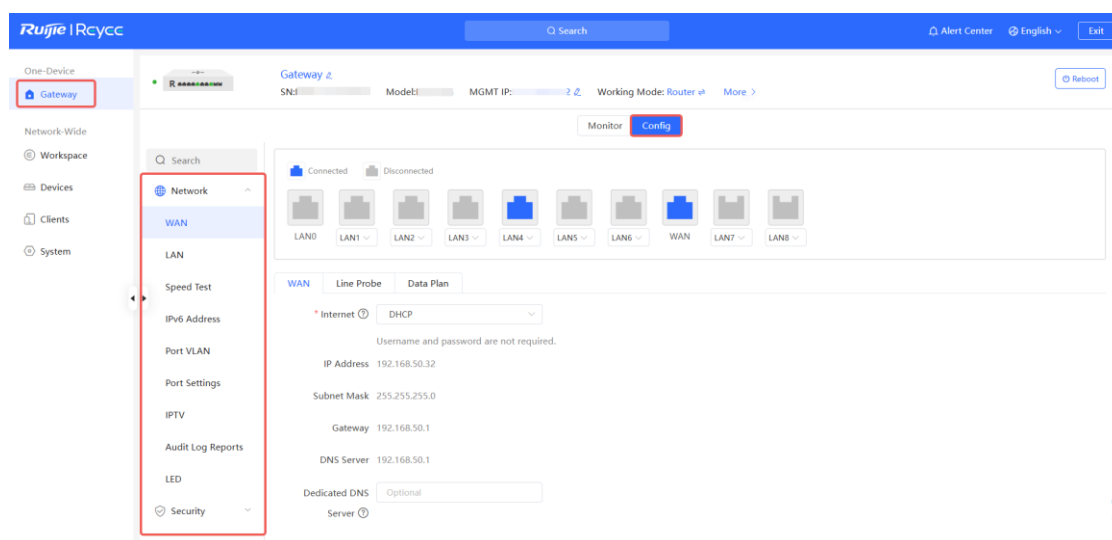

- Method 2: Choose **Network-Wide** > **Devices**. In the device list, click the **Manage** button next to the target device. This method supports configuring any type of device on the network.

One-Device

Gateway

Network-Wide

Workspace

Devices

Clients

All (1) Gateway (1) AP (0) Switch (0) AC (0) Router (0)

Select Reboot Delete Offline IP/MAC/hostname/SN/Si


	Username	Model	SN	IP/MAC	Software Version	Action
Total	Gateway [Master]			1	ReyeeOS	Manage Reboot

Total 1 < 1 > 10/page

3 Network-Wide Monitoring

Choose **Network-Wide > Workspace > Physical Topology**.

The **Workspace** page displays the current network topology, uplink and downlink real-time traffic, network connection status. On the current page, you can monitor, configure, and manage the network status of the entire network.


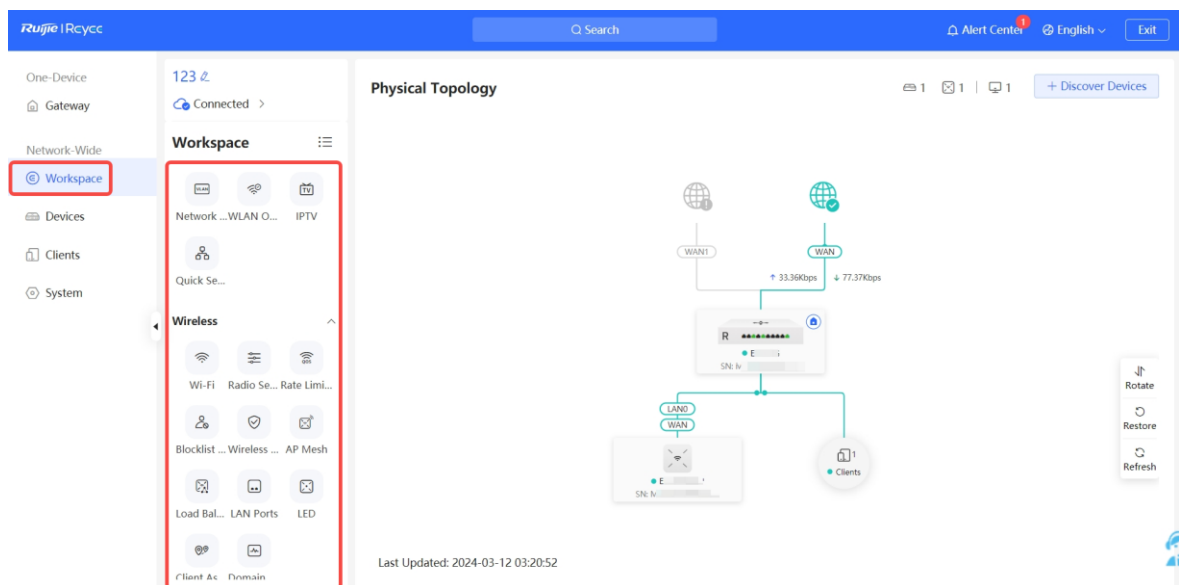


3.1 Viewing Networking Information

The networking topology contains information about online devices, connected port numbers, device SNs, and uplink and downlink real-time traffic.

Physical Topology

1 | 2

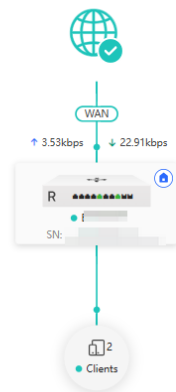[+ Discover Devices](#)

Last Updated: 2025-05-16 07:00:10

- Click the traffic data to view the bandwidth and real-time rates.


WAN

Rate : 1000M


Real-time rate : ↑ 29.14Kbps ↓

140.87Kbps

- Click a device in the topology to view the running status and configuration of the device and configure device functions. By default, the product model is used as the device name. Click  to modify the device name so that the description can distinguish devices from one another.

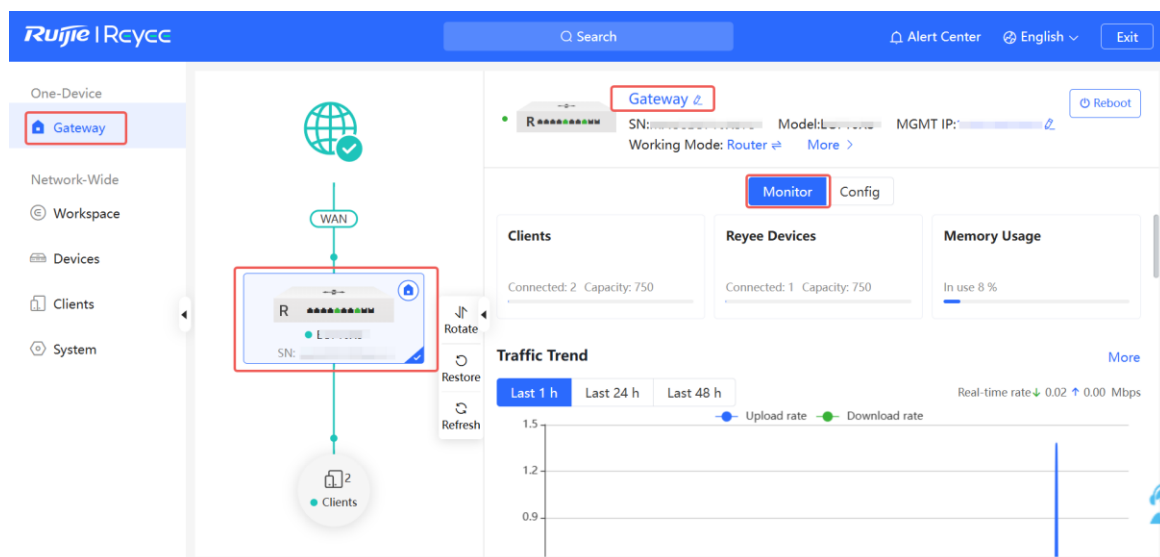



- Choose **Network-Wide > Devices** to view the devices on the current network. Click **Manage** to monitor the device status and perform configuration. Click **Reboot** to reboot the device.

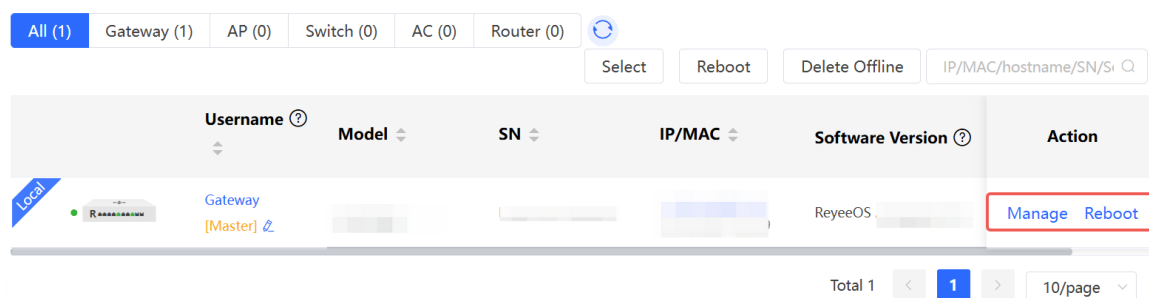

- The update time is displayed in the lower-left corner of the topology view. Click **Refresh** to update the topology to the latest state. It takes some time to update the topology data. Please wait patiently.

Physical Topology

1 | 2

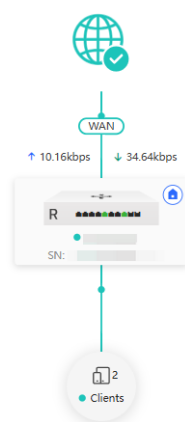[+ Discover Devices](#)


Last Updated: 2025-05-16 07:00:10



3.2 Adding Networking Devices

3.2.1 Wired Connection

- (1) When a new device is connected to the network via a wired connection, the system will display a prompt message indicating the presence of a new device and other unconnected devices. You can click **Handle** to add the new device and other unconnected devices to the network.

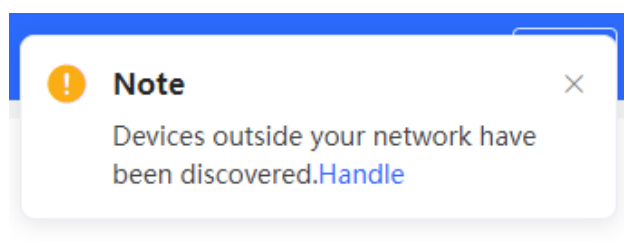

- (2) After the system switches to the **Network List** page, click **Other Network**. In the **Other Network** section, select the device to be added to the network and click **Add to My Network**.

Every network varies in devices and configuration. You can add devices of Other Network to My Network.

My Network

(1 devices)

Model	SN	IP Address	MAC Address	Software Version
Router: [Master]	N0000000000000000	192.168.1.1	08:00:00:00:00:00	ReyeeOS

New Device List

New Device (1 devices) [+ Add to My Network](#)

Other Network

XXXX (2 devices) [+ Add to My Network](#)

Model	SN	IP Address	MAC Address	Software Version
☒ Switch: NBS3100-8GT25FP	N0000000000000002	192.168.1.2	8E:8E:8E:8E:8E:8E	ReyeeOS 1
☒ Switch: NBS3200-48GT4XS	12010102070000	192.168.1.3	08:00:00:00:00:00	ReyeeOS 2

123 (1 devices) [+ Add to My Network](#)

R11088_ (1 devices) [+ Add to My Network](#)

(1 devices) [+ Add to My Network](#)

- (3) You do not need to enter the password if the device is newly delivered from factory. If the device has a password, enter the management password of the device. Device addition fails if the password is incorrect.

Add Device to My Network ×

* Password

[Forgot Password](#) [Add](#)

3.2.2 AP Mesh


If the AP supports the AP Mesh (Reyee Mesh) function, you do not need to connect cables after powering on the AP. The AP can be added to the current network in Reyee Mesh mode, establish a mesh networking with other wireless devices, and automatically synchronize Wi-Fi configuration.



Caution

- To scan the AP, the Reyee Mesh function must be enabled on the current network. (For details, see Section [5.9 Reyee Mesh Settings](#).) The AP should be powered on nearby. It may fail to be scanned in case of long distance or obstacle blocking.
- You can scan to discover new APs on the AP Mesh page only when there are APs supporting the AP Mesh function on the network.

- Power on the new AP and place it near the AP or EGW router on the target network.
- Log in to the web interface of a device on the target network. In **Network-Wide** mode, click **+Discover Devices** in the upper right corner of the **Physical Topology** page to scan the APs in other networks not plugged in with Ethernet cables.

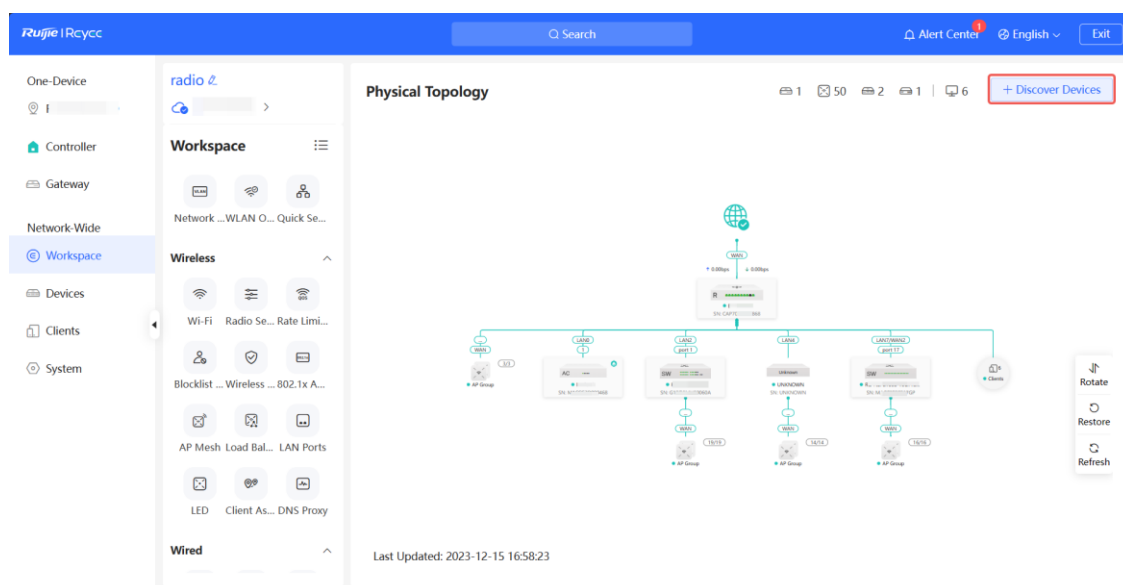

- (3) On the **AP Mesh** page, click **Scan to Add Devices** to scan devices that are not connected to the network via an Ethernet cable.

Device Networking **AP Mesh**

AP Mesh



When AP Mesh is enabled, Devices that support the AP Mesh function can form a network either wirelessly or through a wired connection. The system will automatically optimize mesh links by considering factors such as signal strength, wireless mode, number of antenna streams, channel width, and signal loss across mesh hops to choose the optimal uplink.

Mesh Networking ☒

Old Device ☐

Compatibility ?

Configure Mesh Wi-Fi **Scan to Add Devices**


Mesh Devices List

Username	Model	SN	IP/MAC	Uplink	Status	Connectivity Quality
AP					Offline	


Total 1 **1** 10/page

- (4) Select the APs to be added and click **Mesh Networking**. Up to eight APs can be selected at a time. Wait until network merging finishes.

[← Back](#)

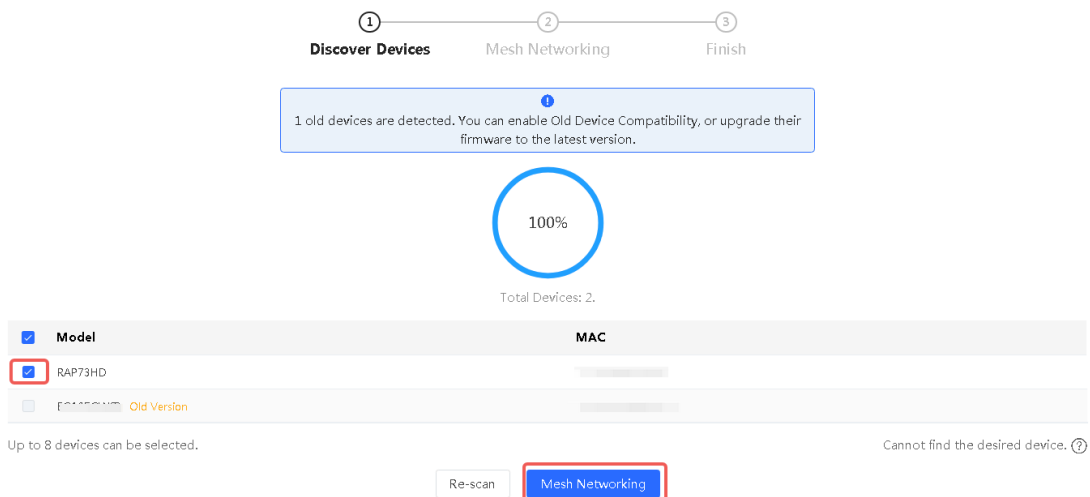

[← Back](#)

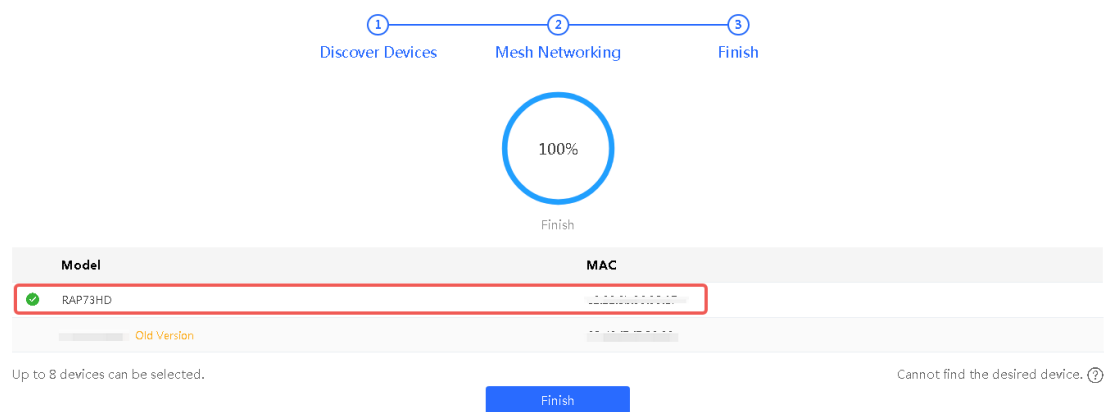

- (5) Check the topology on the **Physical Topology** page to make sure that the new AP has connected to the uplink device in wireless mode.



- (6) Power off the new AP and install it as planned.
- (7) Log in to the web interface of a device on the target network. In **Network-Wide** mode, choose **Devices > AP**.

Make sure that the new AP is online and the corresponding entry contains icon  in the **Relay Information** column. The icon indicates that wireless backhaul is performed through the 5 GHz radio.

All (54) Gateway (1) **AP (50)** Switch (2) AC (1) Router (0) 

Select Reboot Batch Upgrade  Delete Offline IP/MAC/hostname/SN/Sr Q

 Devices outside your network have been discovered. [Handle](#)

Group: **All Groups** [Expand !\[\]\(053ecc0f11ce3eaaf59579a64bc6e912_img.jpg\)](#) [Change Group !\[\]\(fb8baa27ba84e6b5f4f4533f09b4c70a_img.jpg\)](#) **Basic Info** ☐ RF Information ☐ Model

	Username 	Model	Clients	Device Group	Relay Information	Software Version 	Action
	AP ?		0	Default	 View Details	ReyeeOS	Manage Reboot
	AP ?		0	Default	 View Details	ReyeeOS	Manage Reboot
	AP ?		0	Default	 View Details	ReyeeOS	Manage Reboot
	AP ?		0	Default	 View Details	ReyeeOS	Manage Reboot
	AP ?		0	Default	 View Details	ReyeeOS	Manage Reboot

- (8) Click **View Details** following the  icon to obtain information about the uplink device and RSSI.

	AP ?		0	Default	 View Details
	AP ?		0	Default	 View Details
	AP ?		0	Default	 View Details
	AP ?		0	Default	 View Details
	AP ?		0	Default	 View Details
	AP ?		0	Default	 View Details

Noise Floor: -82 dBm
Channel Utilization: 16 %
RSSI: -26 dBm **Good**
Negotiation Rate: 173 Mbps
Uptime: 13 minutes 18 seconds

Uplink  Local

AP  AP 

Model:  Model: 
SN: ZASL-923 SN: G1NC-79
IP: 192.155 IP: 192.131


- (9) Select the target AP to add it to the current network. You do not need to enter the password if the device to add is new. If the device has a password, enter the management password of the device.

3.3 Configuring the Service Network

3.3.1 Configuring the Wired Network

Choose **Network-Wide > Workspace > Network Planning**

- (1) Click **Add Wired VLAN** to add wired network configuration, or select an existing wired VLAN and click **Setup** to modify its configuration.

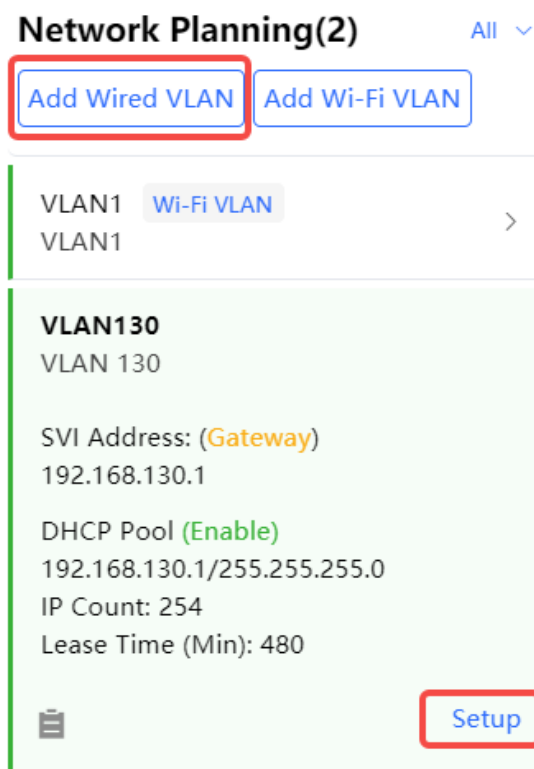

- (2) Configure a VLAN for wired access, specify the address pool server for access clients in this VLAN, and determine whether to create a new DHCP address pool. By default, the gateway is used as the address pool server to allocate addresses to access clients. If an access switch is available in this networking, you can select this switch as the address pool server. After setting the service parameters, click **Next**.

* Description:

VLAN:

* VLAN ID:

Address Pool ☒ Gateway


Server (?)

Gateway/Mask: /


DHCP Pool: ☒

IP Range: -

- (3) Select the switch to configure in the topology, select the switch ports added to this VLAN, and click **Next**.

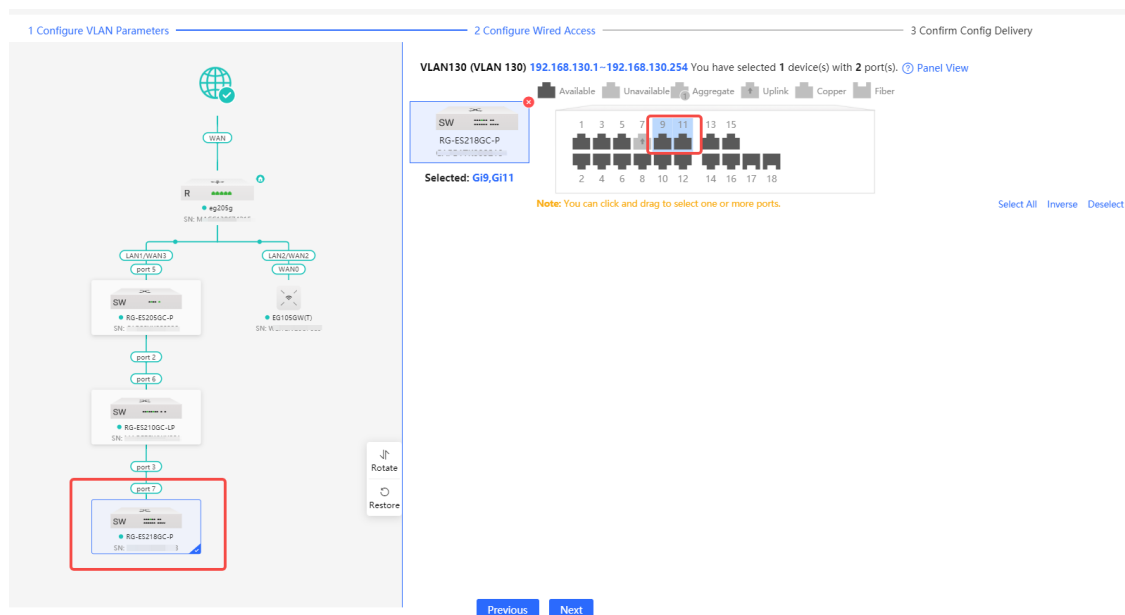

- (4) Confirm that the configuration items to be delivered are correct and then click **Save**. Wait a moment for the configuration to take effect.

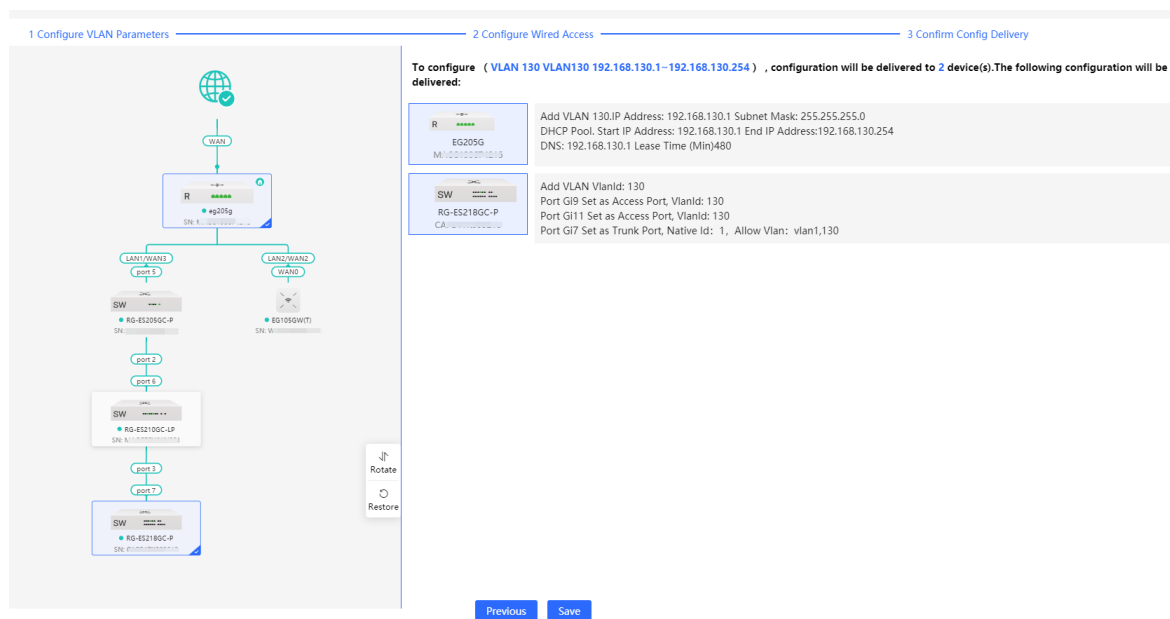

3.3.2 Configuring the Wireless Network

Choose **Network-Wide > Workspace > Network Planning**.

- (1) Click **Add Wi-Fi VLAN** to add wireless network configuration, or select an existing Wi-Fi VLAN and click **Setup** to modify its configuration.

Network Planning(3) All ▾

Add Wired VLAN
Add Wi-Fi VLAN

VLAN1 Wi-Fi VLAN >
VLAN1

VLAN120 Wi-Fi VLAN
VLAN 120

SVI Address: (Gateway)
192.168.120.1

DHCP Pool (Enable)
192.168.120.1/255.255.255.0
IP Count: 254
Lease Time (Min): 480


Setup

VLAN130 >
VLAN 130

(2) Set the SSID, Wi-Fi password, and applicable bands. Click **Next**.

Add

×

* SSID ⓘ

Purpose ⓘ General | IoT | Guest

Band ⓘ ☒ 2.4G ☒ 5G

No available frequency band? Log in to Ruijie Cloud to add or re-identify the target frequency band. [Re-identify](#) [View Causes](#)

Encryption ☐ Open ☒ Security ☐ 802.1x (Enterprise) ⓘ

* Security ⓘ WPA2-PSK ▾

* Wi-Fi Password 

----- [Advanced Settings](#) -----

Cancel

OK

Applicable bands include 2.4 GHz, 5 GHz, and 2.4 GHz + 5 GHz.

Encryption modes include: **Open**, **Security**, and **802.1x (Enterprise)**. When the encryption mode is set to **Security**, you need to set the Wi-Fi password.

Click **Advanced Settings** to configure the advanced parameters, including Wi-Fi Standard, Wireless Schedule, Hide SSID, Client Isolation and so on.

----- [Advanced Settings](#) -----

SSID Encoding

Wi-Fi Standard

Schedule

VLAN

Hide SSID ☐ The SSID is hidden and must be manually entered.

Client Isolation ☐ Prevent mutual access between clients connected to this SSID on this AP.

Layer 2 Isolation ☐ Prevent mutual access between clients connected to this SSID on all APs.

Band Steering ☒ The 5G-supported client will access 5G radio preferentially.

XPress ☐ The client will experience faster speed.

Layer 3 Roaming ☐ The client will keep the IP address unchanged on the Wi-Fi network.

802.11r ☐ After this feature is enabled, roaming time is reduced to achieve fast transition.

LimitSpeed ☐

[Do you want to edit RF parameters? Navigate to Radio Frequency for configuration.](#)

Cancel OK

- (3) Configure a VLAN for wireless access, specify the address pool server for access clients in this VLAN, and determine whether to create a new DHCP address pool. By default, the gateway is used as the address pool server to allocate addresses to access clients. If an access switch is available in this networking, you can select this switch as the address pool server. After setting the service parameters, click **Next**.

* Description:

VLAN:

* VLAN ID:

Address Pool ☒ Gateway

Server ?

Gateway/Mask: /

DHCP Pool: ☒

IP Range: -

- (4) Confirm that the configuration items to be delivered are correct and then click **Save**. Wait a moment for the configuration to take effect.

1 Configure Wireless Access 2 Configure VLAN Parameters 3 Confirm Config Delivery

To configure (VLAN 120 VLAN120 192.168.120.1-192.168.120.254), configuration will be delivered to 3 device(s). The following configuration will be delivered:

- AP: SSID:Test Password:Open
- EG205G: Add VLAN 120, IP Address: 192.168.120.1 Subnet Mask: 255.255.255.0
DHCP Pool: Start IP Address: 192.168.120.1 End IP Address: 192.168.120.254
DNS: 192.168.120.1 Lease Time (Min):480
- SW: Add VLAN Vlanid: 120
Port G17 Set as Trunk Port, Native Id: 1, Allow Vlan: vlan1,120

Previous Save

3.4 Supporting Traffic Monitoring

Traffic monitoring can be carried out based on ports, users, and applications. The real-time or historical uplink traffic, downlink traffic, and number of sessions can be displayed.


3.4.1 Viewing Real-Time Traffic

Choose **One-Device > Gateway > Monitor**.

Click **More** to the right of **Traffic Trend** to access the gateway's monitoring details page. On the page that is displayed, click the **Real-time Traffic** tab.



Select a refresh frequency to set the frequency of real-time traffic refresh.

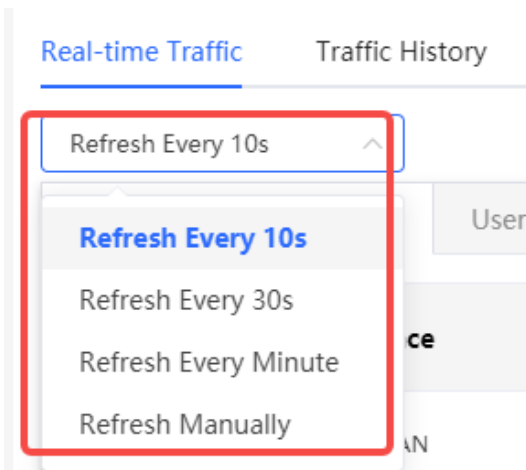

1. Viewing Real-time Traffic of an Interface

Click the **Interface Real-Time Traffic** tab to view the uplink or downlink traffic of an interface or the entire device.

Interface Real-time Traffic

User Real-time Traffic

App Real-time Traffic

Interface

Traffic Rate

Downlink

Uplink

Mbps

ALL-WAN

0.02Mbps

0.10Mbps


WAN

0.02Mbps

0.10Mbps

- View traffic in the recent one hour

Select an interface or **ALL-WAN** in the **Interface** drop-down menu. You can view the traffic and sessions of the interface or device in the last one hour, including the sessions of the excluded WAN interface.

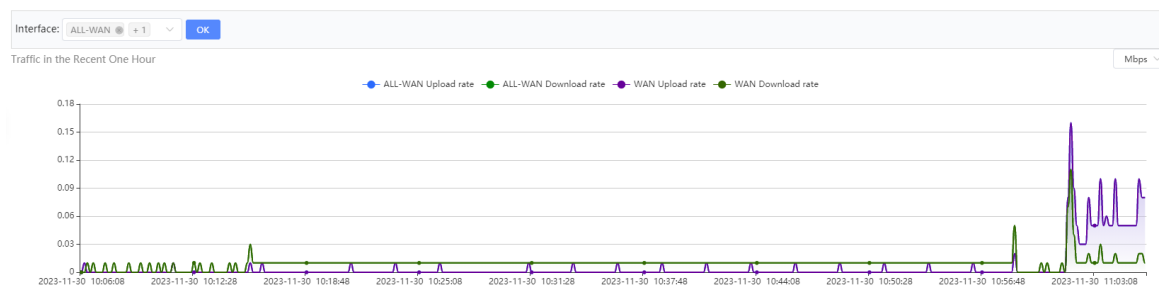


Note

Uplink traffic and downlink traffic are color-coded in the figure. You can move the cursor over a curve to view uplink traffic and downlink traffic at a certain time.

- View the number of sessions and half-open connections in the last one hour

Select an interface or **ALL-WAN** in the **Interface** drop-down menu to check the number of sessions and half-open connections in the last one hour (including the session information of the excluded WAN interface).

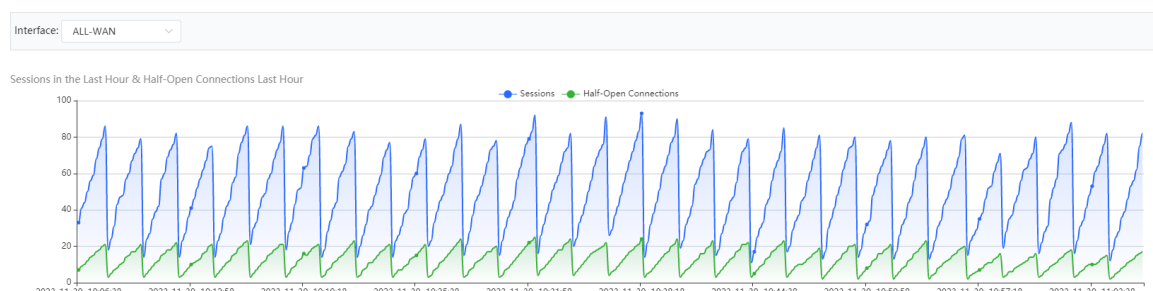

2. Viewing Real-time Traffic of a Client

Click the **User Real-Time Traffic** tab to view the IP address, name, online duration, number of sessions, and uplink and downlink traffic of each client.

If there are multiple clients, the system displays traffic data by downlink traffic in descending order by default. The sorting mode can be switched based on uplink traffic or downlink traffic. You can set the traffic unit, number of items to be displayed on the current page, paging display, and other functions based on service requirements.

No.	IP	Name	Online Duration	Sessions	Flow Rate		Detailed
					Sort by downlink traffic	Mbps	
1	1.1.1.2	1.1.1.2	15 days 7 hours 19 minutes 21 seconds	38		0.00Mbps 0.00Mbps	Detailed

Total 1 1 10/page

Click **Detailed**. The system displays the uplink and downlink traffic rates of various applications used by the current client. You can set the sorting mode (by downlink traffic or uplink traffic), unit, and other parameters based on service requirements.

Note

To view real-time traffic of a client, ensure that the **Traffic Audit** function is enabled on the **App Real-time Traffic** page.

(1.1.1.2) Real-Time Flow Details

Refresh Every 10s X

App	Flow Rate		Sort by downlink traffic	Kbps
	Downlink	Uplink		
DNS				0.35Kbps 0.18Kbps
HTTPS				0.07Kbps 0.12Kbps
SYN_ACK				0.00Kbps 0.00Kbps
Analyzing_APP				0.00Kbps 0.00Kbps
HTTP-BROWSE				0.00Kbps 0.04Kbps

Total 5 < 1 > 10/page

3. Viewing Real-time Traffic of an App

Click the **App Real-Time Traffic** tab and enable **Traffic Audit**. You can view the name, application group, uplink traffic, and downlink traffic of each app.

If there are multiple apps, the system displays traffic data by downlink traffic in descending order by default. The sorting mode can be switched based on uplink traffic or downlink traffic. You can set the traffic unit, number of items to be displayed on the current page, paging display, and other functions based on service requirements.

No.	App	App Group	Flow Rate		Action
			Downlink	Uplink	
1	DNS	Other			0.00Mbps 0.00Mbps
2	HTTPS	Other			0.00Mbps 0.00Mbps
3	Analyzing_APP	Other			0.00Mbps 0.00Mbps
4	SYN_ACK	Other			0.00Mbps 0.00Mbps
5	HTTP-BROWSE	Other			0.00Mbps 0.00Mbps

Total 5 < 1 > 10/page

Click **Detailed**. The details of the traffic used by each user of the current application are displayed in the pop-up dialog box. You can set the sorting mode (by downlink traffic or uplink traffic), unit, and other parameters based on service requirements.

(DNS) Real-Time Flow Details Refresh Every 10s ×

ip	Name	Flow Rate		Sort by downlink traffic	Kbps
		Downlink	Uplink		
1.1.1.2	1.1.1.2				0.69Kbps 0.37Kbps

Total 1 < 1 > 10/page

Click **Block**. In the displayed message, click **OK** to block the corresponding application.

Tips

Are you sure you want to block the current application?

Cancel

OK


3.4.2 Viewing Historical Traffic

Choose **One-Device > Gateway > Monitor**.

Click **More** to the right of the **Traffic Trend** tab. On the gateway monitoring details page, click the **Traffic History** tab.




Select a refresh frequency to set the frequency of historical traffic refresh.

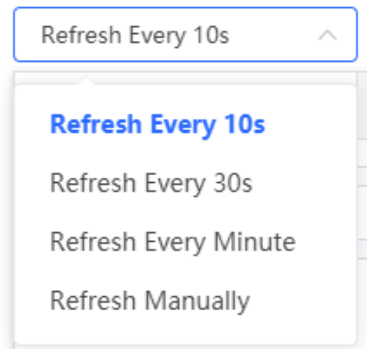

1. Viewing Historical Traffic of an Interface

- (1) Click the **Traffic History** tab.
- (2) Select an interface or ALL-WAN in the Interface drop-down menu.
- (3) Select a time range.
- (4) The system displays historical traffic, session, and half-open connection statistics of an interface or the device within a specified period.

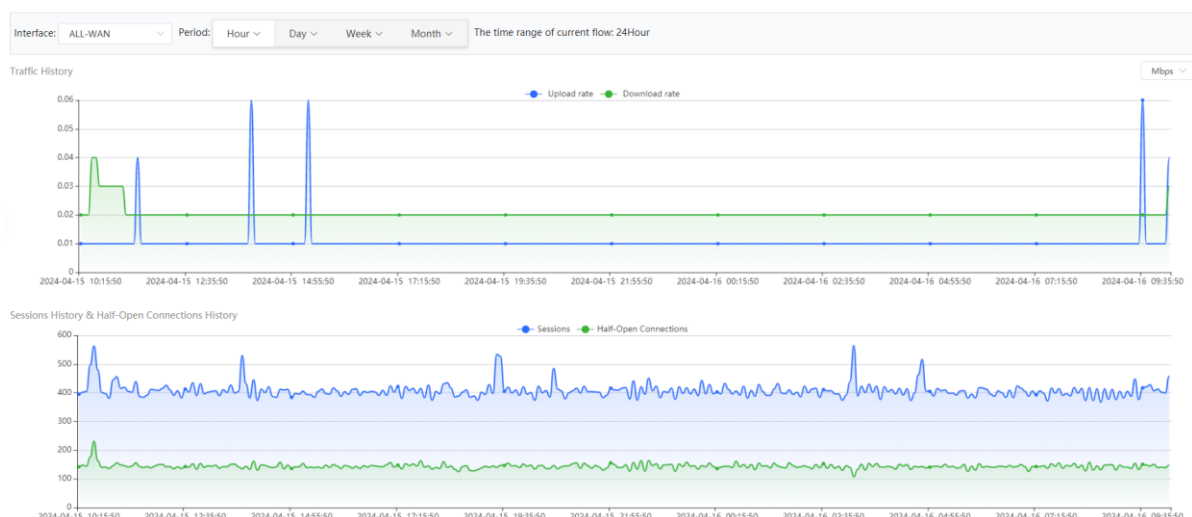

Note

Uplink traffic and downlink traffic are color-coded in the figure. You can move the cursor over a curve to view uplink traffic and downlink traffic at a certain time.

2. View Historical Traffic of a Client

Click the **User Traffic History** tab. Select a time range. You can view historical traffic data of clients today or this week on the **User Traffic History** page.

If there are multiple clients, the system displays the traffic data by downlink traffic in descending order by default. You can view the online duration, uplink traffic, and downlink traffic of each client in the time span. The sorting mode can be switched based on the uplink traffic or downlink traffic. You can set the traffic unit, number of items to be displayed on the current page, paging display, and other functions based on service requirements.

Period: Day Week Month The time range of current flow: Today

No.	IP	Name	Online Duration	Traffic History		Detailed
1	1.1.1.2	1.1.1.2	10 hours 9 minutes 10 seconds	Downlink Uplink	Sort by downlink traffic MB	2.59MB 1.49MB Detailed

Total 1 < 1 > 10/page

Click **Detailed**. The details of the current client's app usage, including the traffic size and online duration, are displayed in a pop-up dialog box. You can set the sorting mode (by downlink traffic or uplink traffic), unit, and other parameters based on service requirements.

Note

To view historical traffic of a client, ensure that the **Traffic Audit** function is enabled on the **App Real-Time Traffic** page.

(1.1.1.2) Today Flow Details Refresh Every 10s ×

App	Online Duration	Traffic History	
DNS	10 hours 36 minutes 36 seconds	Downlink Uplink	2.59MB 1.41MB
HTTPS	10 hours 36 minutes 36 seconds	Downlink Uplink	0.06MB 0.09MB
HTTP-BROWSE	2 hours 50 minutes 36 seconds	Downlink Uplink	0.05MB 0.04MB
SYN_ACK	2 hours 18 minutes 4 seconds	Downlink Uplink	0.01MB 0.01MB
Analyzing_APP	2 hours 12 minutes 16 seconds	Downlink Uplink	0.01MB 0.00MB
			0.00MB

Total 6 < 1 > 10/page

3. View Historical Traffic of an App


Click the **Traffic History** tab, enable the **Traffic Audit** function, and view the application historical traffic.

Note


The status of **Traffic Audit** switch is consistent with that on the **App Real-Time Traffic** page. After it is enabled, the **App Real-Time Traffic** function and **App History Traffic** function are enabled.

On the **App History Traffic** page, you can view historical traffic of an application today or this week.

If there are multiple applications, the system displays traffic data by downlink traffic in descending order by default. You can view the name, application group, uplink traffic, and downlink traffic of each application in the time span. The sorting mode can be switched based on uplink traffic or downlink traffic. You can set the traffic unit, number of items to be displayed on the current page, paging display, and other functions based on service requirements.

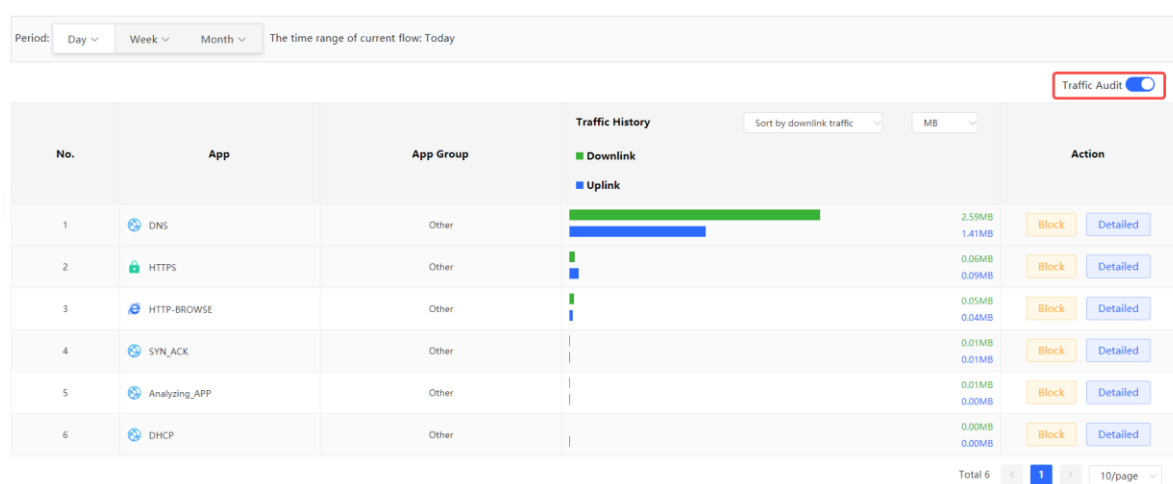

Click **Detailed**. The system displays details about the traffic used by each client of the current application in a pop-up dialog box. You can set the sorting mode (by downlink traffic or uplink traffic), unit, and other parameters based on service requirements.

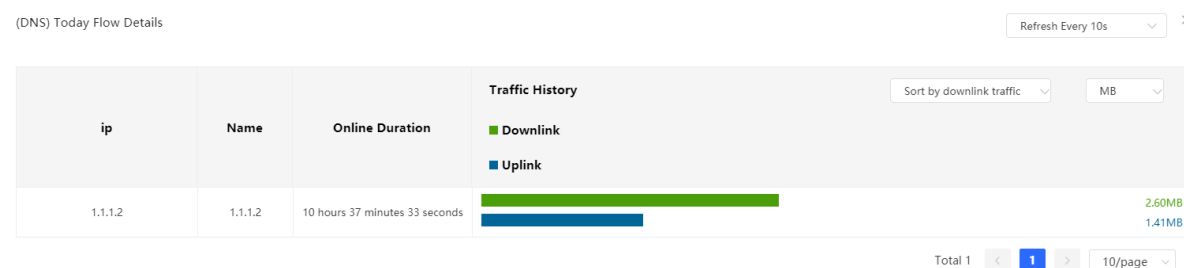

Click **Block**. In the displayed message, click **OK** to block the corresponding application.

Tips



Are you sure you want to block the current application?

Cancel

OK

3.5 Supporting the URL Logging Function

URL logs record and display website domain names accessed by devices connected to LAN ports within a certain minute, access count, and audit results.

Choose **One-Device > Gateway > Monitor**.

Click **More** to the right of the **Traffic Trend** tab. On the page that is displayed, click the **URL Log** tab.

(1) Toggle on the **Enable** switch. On the pop-up dialog box, click **OK**.

Enable ☐

Tips



! Are you sure you want to enable the URL Log?

Cancel

OK

(2) (Optional) Configure **record IP**.

The system records access records of all devices connected to LAN ports by default. If you need to view access records of a single device, set **record IP**.

Enter the device IP address in **record IP** and click **Save**.

Enable ☒ Record IP Only ⓘ 192.168.110.11 Save Enter IP or URL for search Refresh

Time	IP	Access Count	URL	Action
2023-11-30 15:17	192.168.110.11	2	http://conf.wsm.360.cn	Allow
2023-11-30 15:17	192.168.110.11	2	http://qup.f.360.cn	Allow

Note

If you need to restore access records of all devices connected to LAN ports, clear information in **Record IP Only** and click **Save**.

(3) Check access records.

The system displays detailed access records, including the time, IP address.

You can search for access records by IP address or URL.

Enable ☒ Record IP Only ⓘ Example: 1.1.1.1 Save 192.168.110.11 Refresh

Time	IP	Access Count	URL	Action
2023-11-30 15:20	192.168.110.11	2	http://conf.wsm.360.cn	Allow
2023-11-30 15:20	192.168.110.11	2	http://qup.f.360.cn	Allow
2023-11-30 15:20	192.168.110.11	1	https://msgmq.rj.link	Allow

3.6 Processing Alerts

When a network exception occurs, the system generates an alert and provides suggested actions. Click **Alert Center** in the navigation bar to view the faulty device, alert details, and suggested actions. You can troubleshoot the fault based on the suggested actions.

Ruijie iRcyc Search Alert Center English Exit

View and manage alarms.

Alert List View Unfollowed Alert

Expand	Alerts	Suggestion	Action
▼	The IP address of the downlink device is already in use.	Please check the IP address of the downlink device. If it is a static IP address, please change the IP address.	Delete Unfollow

Device Name	SN	Type	Time	Details	Action
		DOWNLINK	2023-12-11 14:38:55	An IP address conflict occurs. IP address: 10.52.48.25. Conflicting MAC address: 08:00:27:00:00:00:5 and f	Delete

Total 1 1 10/page

4 Network Settings

4.1 Switching the Work Mode

4.1.1 Work Mode

For details, see Section [2.4 Work Mode](#).

4.1.2 Self-Organizing Network Discovery

When setting the work mode, you can set whether to enable the self-organizing network discovery function. This function is enabled by default.

After the self-organizing network discovery function is enabled, the device can be discovered in the network and discover other devices in the network. Devices network with each other based on the device status and synchronize global configuration. You can log in to the Web management page of any device in the network to check information about all devices in the network. After this function is enabled, clients can maintain and manage the current network more efficiently. You are advised to keep this function enabled.

If the self-organizing network discovery function is disabled, the device will not be discovered in the network and it runs in standalone mode. After logging in to the Web page, you can configure and manage only the currently logged in device. If only one device is configured or global configuration does not need to be synchronized to the device, you can disable the self-organizing network discovery function.



Note

- In AC mode, the self-organizing network discovery function is enabled by default.
- After the self-organizing network discovery function is enabled, you can view the self-organizing role of the device on the Device Details page.
- The menus on the Web page vary depending on whether the self-organizing network discovery function is enabled. (For details, see Section [2.7 Switching the Work Mode](#).) Find the configuration entry for this function according to the instructions in Configuration Steps below.

4.1.3 Configuration Steps

Choose **One-Device** > **Gateway**.

Click the current work mode to edit the work mode.



Caution

After you switch the work mode, the device will restore factory settings and restart. Please proceed with caution.



Gateway [↗](#)

SN:

Model:

MGMT IP:

Working Mode: Router [↔](#)

[More >](#)

[Reboot](#)

AC function switch: If a device works in the router mode and the self-organizing network discovery function is enabled, you can enable or disable the AC function. After the AC function is enabled, the device in the router

mode supports the virtual AC function and can manage downlink devices. If this function is disabled, the device needs to be elected as an AC in self-organizing network mode and then manage downlink devices.

Working Mode ✕

Description:

1. The device IP address may change upon mode change.
2. Change the endpoint IP address and ping the device.
3. Enter the new IP address into the address bar of the browser to access Eweb.
4. The system menu varies with different work modes.
5. The device will be restored and rebooted up on mode change.

Working Mode ? Router ▼

Self-Organizing Network ? ✔ i Tips

AC ? ✔

Cancel

Save

4.2 Port Settings

You can choose **Port Settings** to set port parameters and view the port information.

4.2.1 Setting the Port Parameters

Choose **One-Device > Gateway > Config > Network > Port Settings > Basic Settings**.

Basic Settings Port Info

i Configure port status, duplex mode, rate and flow control.

Port	Status	Duplex Mode/Rate		Flow Control		Action
		Config Status	Actual Status	Config Status	Actual Status	
LAN0	Enable	Auto/Auto	Unknown/Unknown	Disable	Unknown	Edit
LAN1/WAN3	Enable	Auto/Auto	Full-Duplex/1000M	Disable	Disable	Edit
LAN2/WAN2	Enable	Auto/Auto	Full-Duplex/1000M	Disable	Disable	Edit
LAN3/WAN1	Enable	Auto/Auto	Full-Duplex/1000M	Disable	Disable	Edit
WAN	Enable	Auto/Auto	Full-Duplex/1000M	Disable	Disable	Edit

- (1) Choose the target port and click **Edit**.

Port:LAN0

✕

Status: Rate: Working Mode: Flow Control:

Cancel

OK

Table 4-1 Port Configuration Parameters

Parameter	Description
Status	Enable or disable the port.
Rate	Set the data transmission rate of the port. The options are Auto , 10M , 100M , and 1000M . When selecting the port rate, ensure that the connected device can communicate at the same rate. If a device only supports a rate of 100 Mbps, but the port rate is set to 1000 Mbps, communication may fail due to rate mismatch.
Working Mode	Set the working mode of the port: ● Auto: The port automatically detects the working mode of the connected device and automatically selects the full-duplex or half-duplex mode based on the connected device. ● Full-duplex: In full-duplex mode, a port can send and receive data simultaneously, achieving bidirectional communication. ● Half-duplex: In half-duplex mode, a port can only send or receive data, but not both.  Caution When the WAN0 port of the RG-EG406XS operates at 10 Mbps or 100 Mbps, the port's working mode cannot be set to half-duplex mode.
Flow Control	When wired ports of the device work in different rates, data blocking may occur, leading to slow network speed. Enabling port flow control helps relieve the data congestion.  Caution When flow control is enabled on the LAN4/WAN4 port of the RG-EG406XS but disabled on the peer device, the actual flow control status displayed on the local device is "Enable."

(2) Set the port parameters and click **OK**.

4.2.2 Viewing the Port Information

Choose **One-Device > Gateway > Config > Network > Port Settings > Port Info.**

Basic Settings [Port Info](#)

Traffic data is updated every 5 minutes. [Refresh](#) [Clear All](#)

Port	Rate	Rx/Tx Speed (kbps)	Rx/Tx Bytes	Rx/Tx Packets	CRC/FCS Error Packets	Corrupted/Oversized Packets	Conflicts
LAN0	Disconnected	0/0	1.09G/1.73G	8386170/7207651	0/0	0/0	0
LAN1/WAN3	1000M	0/0	93.37M/34.26M	256091/173024	0/0	0/0	0
LAN2/WAN2	1000M	0/0	49.28M/34.04M	240416/239703	0/0	0/0	0
LAN3/WAN1	1000M	0/8	364.87M/615.33M	1046197/1163807	0/0	0/0	0
WAN	1000M	48/8	2.95G/1.54G	12632449/9913297	0/0	0/0	0

4.3 Configuring the WAN Ports

Choose **One-Device > Gateway > Config > Network > WAN.**

You can configure multi-line access for the device to allow multiple lines to work simultaneously. After you switch to multi-line access, you need to specify the egress provider of the lines and set the load balancing mode, in addition to setting basic network parameters for the WAN interfaces.

Caution

The number of lines supported varies with the product. The actual configuration prevails.

4.3.1 Configuring the Internet Access Mode

Choose **One-Device > Gateway > Config > Network > WAN.**

The device can access the WAN in one of the following three methods: static IP, DHCP, and PPPoE dialing. Select a proper method based on the actual broadband line type. For details, see Section [2.5 Configuration Wizard \(Router Mode\)](#).

When the Internet access mode is not **DHCP** or **PPPoE**, you can specify a DNS server to ensure that the device can correctly parse domain names and access Internet resources, thereby improving the access speed and security.

Single Line

Dual-Line

Three Lines

Four Lines

WAN

Line Detection

* Internet ?

DHCP

Username and password are not required.

IP Address 10.52.48.172

Subnet Mask 255.255.248.0

Gateway 10.52.48.1

DNS Server 172.30.44.20 192.168.5.28

Dedicated DNS

Optional

Server ?

----- [Advanced Settings](#) -----

Save

4.3.2 Modifying the MAC Address

Choose **One-Device > Gateway > Config > Network > WAN**.

Sometimes, the provider restricts Internet access of devices with unknown MAC addresses out of security considerations. In this case, you can change the MAC addresses of the WAN interfaces to valid MAC addresses.

Select the target WAN interface. Click **Advanced Settings**, enter a MAC address, and click **Save**. You do not need to modify the default MAC address unless otherwise specified.

----- **Advanced Settings** -----

* MTU (?) [MTU Detection](#)

* MAC Address (?)

802.1Q Tag ☐

Private Line (?) ☐

NAT Mode (?) ☒

[Save](#)

4.3.3 Modifying the MTU

Choose **One-Device > Gateway > Config > Network > WAN**.

1. Modifying the MTU

MTU specifies the maximum transmission unit allowed to pass a WAN interface. By default, the MTU of a WAN interface is 1500 bytes. Sometimes, large data packets are limited in transmission speed or prohibited in the ISP network, leading to slow network speed or even network disconnection. If this occurs, you can click **Advanced Settings**, set the MTU to a smaller value.

----- [Advanced Settings](#) -----

* MTU (?) [MTU Detection](#)

* MAC Address (?)

802.1Q Tag ☐

Private Line (?) ☐

NAT Mode (?) ☒

[Save](#)

If the MTU value is unknown, click **MTU Detection** to configure the one-click MTU detection, and adjust the MTU settings based on the results obtained from MTU detection.

2. Detecting the MTU

Click **MTU Detection** to configure the one-click MTU detection to determine the MTU between two communication devices.

Enter the destination IP/domain name, retry count, ICMP echo request timeout, minimum MTU, maximum MTU, and click **Start** to start the detection.

MTU Detection



* IP Address/Domain	www.google.com
* Retry Count	1
* ICMP Echo Request Timeout	1 s
* Min. MTU	576
* Max. MTU	1500
Start Stop	
Result	

4.3.4 Configuring the Private Line

Choose **One-Device > Gateway > Config > Network > WAN**.

Click **Advanced Settings**, turn on **Private Line** and determine whether to set the current WAN line as a private line. Generally, private lines are used for access to specific internal networks but not the Internet. Private lines provide higher network security.

----- Advanced Settings -----

* MTU (?) [MTU Detection](#)

* MAC Address (?)

802.1Q Tag ☐

Private Line (?) ☒

NAT Mode (?) ☒

[Save](#)

4.3.5 Configuring the VLAN Tag

Choose **One-Device > Gateway > Config > Network > WAN**.

Some ISPs require that packets transmitted to their networks carry VLAN IDs. In this case, you can click **Advanced Settings**, enable the **802.1Q Tag** function and set a **VLAN ID** and **Priority** for the WAN interface. By default, the VLAN tag function is disabled. You are advised to keep the VLAN tag function disabled unless otherwise specified.

----- Advanced Settings -----

* MTU (?) [MTU Detection](#)

* MAC Address (?)

802.1Q Tag ☒

*** VLAN ID**

Private Line (?) ☐

NAT Mode (?) ☒

[Save](#)

4.3.6 Configuring NAT Mode

Choose **One-Device > Gateway > Config > Network > WAN**.

When an intranet needs to communicate with an extranet, Network Address Translation (NAT) must be configured to convert the private IP address into a globally unique IP address, so that the private network can access the public network.

Click **Advanced Settings**, toggle on **NAT Mode** to enable the NAT mode. When the NAT mode is disabled, this router operates in router mode to forward data packets, enabling mutual access between hosts connected to the LAN and the WAN interfaces of this router.

----- Advanced Settings -----

* MTU (?) [MTU Detection](#)

* MAC Address (?)

802.1Q Tag ☐

Private Line (?) ☒

NAT Mode (?) ☒

[Save](#)

⚠ Caution

Disabling NAT mode may potentially impact the functionality of the self-organizing network (SON) feature.

4.3.7 Configuring the Multi-Line Load Balancing Mode

Choose **One-Device > Gateway > Config > Network > Single Line/Dual-Line/Three Lines/Four Lines > WAN > Load Settings**.

When multiple links are available, some traffic is forwarded along the link selected based on the address library and the remaining traffic is distributed to other links in load balancing mode.

Table 4-2 Load balancing modes

Load Balancing Mode	Description
Loading balancing	The traffic will be distributed across multiple links according to the weight of each WAN interface. Larger traffic will be distributed to the WAN interface with a higher weight. When you select this mode, you must specify the weight of each WAN interface. For example, if the weight of WAN and WAN 1 ports is set to 3 and 2 respectively, then, 60% of the total traffic will be routed over WAN and 40% over WAN 1.

Load Balancing Mode	Description
Active/Secondary	All traffic is routed over the primary interface. Once the primary interface fails, traffic will be switched over to the secondary interface. If there are multiple primary or secondary interfaces, the weight of these interfaces must be set. (See balanced mode.)
Forced Switch	With Load Mode switched from Load balancing to Active/Secondary , if Forced Switch is not selected, traffic of new connections will be routed through the specified primary interface, while the egress for the traffic of existing connections remains unchanged. When Forced Switch is selected, traffic of both new and existing connections will be routed to the primary interface.

The system supports IPv4 and IPv6 multi-link load balancing. IPv4 multi-link load balancing is enabled by default, while IPv6 multi-link load balancing needs to be enabled manually.

1. Configuring IPv4 Multi-Link Balancing

Load Balancing Settings v4

Load Mode (?) Loading balancing

Load Balancing Policy Smart Load Balancing

WAN Rate

* Uplink 1000 Mbps * Downlink 1000 Mbps

WAN1 Rate

* Uplink 1000 Mbps * Downlink 1000 Mbps

Load Balancing Settings v4

Load Mode (?) Active/Secondary ▾ (?) ☐ Forced Switch

Load Balancing Policy Smart Load Balancing ▾

WAN0 Set as Primary Interface ▾

* Uplink 1000 Mbps * Downlink 1000 Mbps

WAN1 Set as Secondary Interface ▾

* Uplink 1000 Mbps * Downlink 1000 Mbps

- (1) Select a load balancing mode from the **Load Mode** drop-down list.
- (2) Select a loading balancing policy from the **Load Balancing Policy** drop-down list.

Table 4-3 Description of Load Balancing Policies (IPv4)

Load Balancing Policy	Description
Based on Connections	After you enable this policy, the traffic is routed over multiple links based on the links. Packets with the same source IP address, destination IP address, source port, destination port, and protocol are routed over the same link.
Based on Src IP Address	After you enable this policy, the traffic is routed over multiple links based on the source IP address. The traffic from the same user (same source IP address) will be routed to the same interface. This policy prevents traffic from the same user from being routed to different links, lowering the risks of network access exceptions.
Based on Src and Dest IP Address	After you enable this policy, the traffic is routed over multiple links based on the source IP address and destination. The traffic of the same source IP address and destination IP address will be routed to the same interface.
Smart Load Balancing	After you enable this feature, the traffic is routed over multiple links based on the link bandwidth, the actual loads of the links, application recognition and traffic prediction.

- (3) Set the uplink and downlink bandwidths or the weight for each WAN interface.
- When the load balancing policy is set to **Based on Connections**, **Based on Src IP Address**, or **Based on Src and Dest IP Address**, a weight must be set for each WAN interface.

Load Balancing Settings v4

Load Mode (?) Loading balancing ▼

Load Balancing Policy Based on Src IP Addresses ▼

* WAN Weight 1

* WAN1 Weight 1

Note

The higher the value of the weight, the more traffic is directed to the WAN interface.

- When the load balancing policy is set to **Smart Load Balancing**, the uplink and downlink bandwidths must be set for each WAN interface.

Load Mode Loading balancing ▼

Load Balancing Policy Smart Load Balancing ▼

WAN0 Rate

* Uplink 1000 Mbps * Downlink 1000 Mbps

WAN1 Rate

* Uplink 1000 Mbps * Downlink 1000 Mbps

- (4) Click **Save**.

2. Configuring IPv6 Multi-Link Balancing

Load Balancing Settings v6

Enable ☒

Load Mode (?) Loading balancing

Load Balancing Policy Based on Connections

If you fail to access online bank service, please select Based on Src IP Address.

* WAN Weight 1

* WAN1 Weight 1

Save

- (1) Toggle on **Enable** to enable the IPv6 multi-link load balancing mode.
- (2) Select a load balancing mode from the **Load Mode** drop-down list.
- (3) Select a loading balancing policy from the **Load Balancing Policy** drop-down list.

Table 4-4 Description of Load Balancing Policies (IPv6)

Load Balancing Policy	Description
Based on Connections	After you enable this policy, the traffic is routed over multiple links based on the links. Packets with the same source IP address, destination IP address, source port, destination port, and protocol are routed over the same link.
Based on Src IP Address	After you enable this policy, the traffic is routed over multiple links based on the source IP address. The traffic from the same user (same source IP address) will be routed to the same interface. This policy prevents traffic from the same user from being routed to different links, lowering the risks of network access exceptions.
Based on Src and Dest IP Address	After you enable this policy, the traffic is routed over multiple links based on the source IP address and destination. The traffic of the same source IP address and destination IP address will be routed to the same interface.

- (4) Set a weight for each WAN interface.

The valid range of weight is 1 to 100000.

Note

The higher the value of the weight, the more traffic is directed to the WAN interface.

- (5) Click **Save**.

4.3.8 Configuring Link Detection

Choose **One-Device > Gateway > Config > Network > Single Line/Dual-Line/Three Lines/Four Lines > Line Detection**.

After configuring multiple WAN interfaces, use the link detection function to check whether lines are connected to the external network. If the network is down, the system does not select a route based on the interface, such as load balancing, policy-based routing, and ISP routing.

The system supports IPv4 and IPv6 WAN link detection, which can be enabled separately.

1. Configuring IPv4 WAN Link Detection

- (1) On the **IPv4 WAN Link Probe** page, select a WAN interface, and toggle on **Enable** to enable IPv4 WAN link detection.

IPv4 WAN Link Probe

Interface	Enable	Destination IP	Latency/ms	Packet loss/%	Status	Action
WAN0		8.8.8.8 www.google.com	23.49	0.00	Online	Edit
WAN1		8.8.8.8 www.google.com	0.00	0.00	Online	Edit

- (2) In the WAN interface list, select a WAN interface for link detection, and click **Edit**.
- (3) Configure the parameters of the link detection function, and click **OK**.

Edit

×

Destination IP	8.8.8.8	Add
	www.google.com	Delete

----- [Advanced Settings](#) -----

* Probe Interval (s)	1
* Timeout (s)	3
* Number of Consecutive Probe Successes	40
* Probe Rounds for Going Offline	2

Cancel

OK

Table 4-5 Description of Link Detection (IPv4)

Parameter	Description
Destination IP	The destination IP address to which the system sends ping messages. You can set up to three destination IP addresses. The system sends ping messages to one of the IP addresses randomly during detection.
Probe Interval (s)	Interval for the system to perform connectivity detection. The default value is 1 second.
Timeout (s)	The maximum timeout period during which the device waits for a response after sending a ping message to the destination IP address. If no response is received within this time, the probe packet is marked as timed out. The default value is 3 seconds.
Number of Consecutive Probe Successes	The system periodically sends a ping message to a detection destination IP address at the specified interval. If the ping succeeds and the number of consecutive successful pings reaches the set number of Number of Consecutive Probe Successes , the WAN interface is set to be online.
Probe Rounds for Going Offline	The system periodically sends a ping message to a detection destination IP address at the specified interval. If the ping fails and the number of consecutive unsuccessful pings reaches the set number of Probe Rounds for Going Offline , the WAN interface is set to be offline.

(4) Click **OK**.

2. Configuring IPv6 WAN Link Detection

(1) On the **IPv6 WAN Link Detection** page, toggle on **Enable** to enable IPv6 WAN link detection.

IPv6 WAN Link Probe

Interface	Enable	Destination IP	Latency/ms	Packet loss/%	Status	Action
WAN0	☐	2001:4860:4860::888 8 2001:4860:4860::884 4	0.00	0.00	Offline	Edit
WAN1	☐	2001:4860:4860::888 8 2001:4860:4860::884 4	0.00	0.00	Online	Edit

[Save](#)

(2) In the WAN interface list, select a WAN interface for link detection, and click **Edit**.

(3) Configure the link detection parameters, and click **OK**.

Edit

✕

Destination IP

----- Advanced Settings -----

* Probe Interval (s)

* Timeout (s)

* Number of Consecutive Probe Successes

* Probe Rounds for Going Offline

Cancel

OK

Table 4-6 Description of Link Detection (IPv6)

Parameter	Description
Destination IP	The destination IP address (IPv6) to which the system sends ping messages. You can set up to three destination IP addresses. The system sends ping messages to one of the IP addresses randomly during detection.
Probe Interval (s)	Interval for the system to perform connectivity detection. The default value is 1 second.
Timeout (s)	The maximum timeout period during which the device waits for a response after sending a ping message to the destination IP address. If no response is received within this time, the probe packet is marked as timed out. The default value is 3 seconds.
Number of Consecutive Probe Successes	The system periodically sends a ping message to a detection destination IP address at the specified interval. If the ping succeeds and the number of consecutive successful pings reaches the set number of Number of Consecutive Probe Successes , the WAN interface is set to be online.

Parameter	Description
Probe Rounds for Going Offline	The system periodically sends a ping message to a detection destination IP address at the specified interval. If the ping fails and the number of consecutive unsuccessful pings reaches the set number of Probe Rounds for Going Offline , the WAN interface is set to be offline.

(4) Click **Save**.

4.3.9 Configuring Data Plan

Note

Due to the overheads and conversions of different network protocols, the data volume reported by this device does not represent the actual billable data usage measured by your network provider.

Choose **One-Device > Gateway > Config > Network > WAN > Data Plan**.

When a traffic limit is set on the WAN interface, traffic to the WAN interface may be blocked or the load balancing ratio of WAN interfaces may be adjusted if this threshold is exceeded.

(1) Click **Add**.

Single Line
Dual-Line
Three Lines
Four Lines

WAN0
WAN1
WAN2
Load Settings
Line Probe
Data Plan

 Due to the overheads and conversions of different network protocols, the data volume reported by this device does not represent the actual billable data usage measured by your network provider.

Data Plan 

+ Add

Interface	Schedule	Accounting Status	Action	Action
	Billing Cycle: Monthly Settlement Date: 1	Total Data: 50GB	Quota alert threshold: 80% Action: Block	Edit Delete

(2) Configure the parameters.

×

* Interface Select ▼

Billing Cycle ☒ Monthly ☐ Daily ☐ Single time

* Settlement Date ? 1

* Total Data MB ▼

Quota Alert ☒ %

Action ? Block ▼

Cancel
OK


Table 4-7 Description of Data Plan

Parameter	Description
Interface	The interface on the network that require traffic limiting configuration. Only one traffic limit policy can be applied to each interface.
Billing Cycle	Cycle for traffic quota settlement: ● Monthly: The used quota is reset to zero at 00:00 on the settlement day of each month, and billing of traffic usage starts again. ● Daily: The used quota is reset to zero at 00:00 daily, and billing of traffic usage starts again. ● Single Time: The used quota is not reset cyclically. Once the applied traffic reaches the total limit, billing is stopped.
Settlement Date	Required when the Billing Cycle is set to Monthly . At 0:00 on the settlement date, the used quota is reset to zero.
Total Data	The traffic quota for the WAN interface.
Quota Alert	When Quota Alert is enabled, an alert is generated on Ruijie Cloud if the proportion of used traffic to Total Data exceeds the specified percentage.
Action	Action after traffic quota is reached: ● None: Continue to apply the current traffic forwarding policy. ● Block: Block any traffic from being routed over this WAN interface. ● Adjust Load Balance Ratio: Adjust the load balancing ratio of each WAN interface on the network. Once "Adjust Load Balancing Ratio" is selected for one WAN interface, it cannot be selected for others simultaneously.

4.4 Configuring Speed Test

You can use the rate test function to easily monitor the transmission rate of individual ports. In the case of ports with low transmission rates, you can identify and address potential issues to ensure that service quality remains high.

Choose **One-Device > Gateway > Config > Network > Speed Test**.

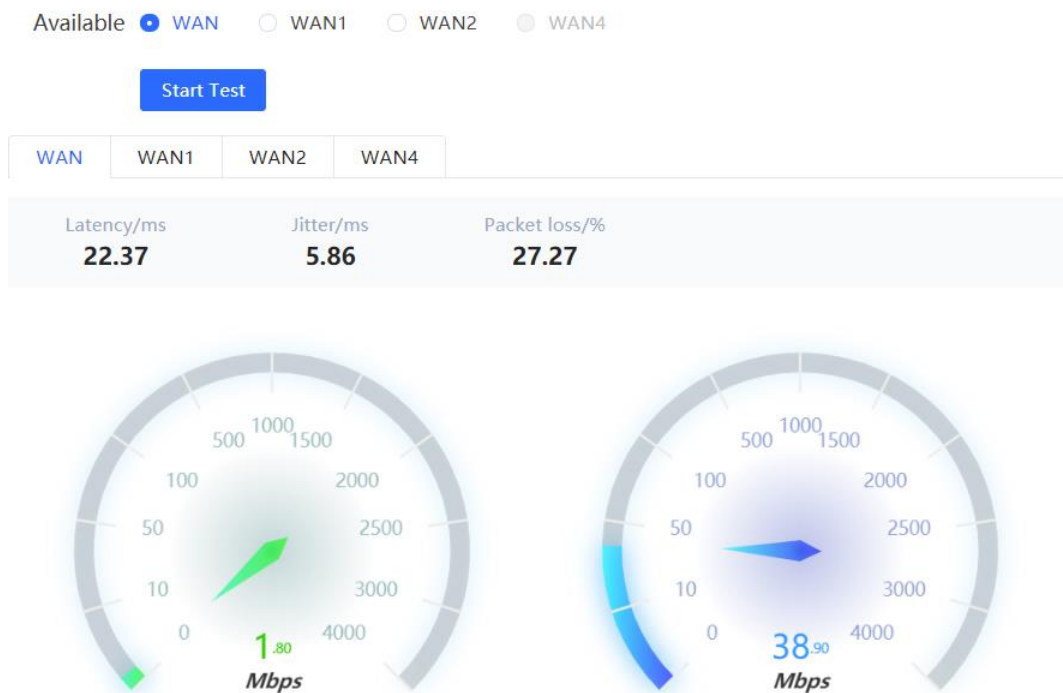

- (1) Select the WAN interface to be tested. You can click **Select All** to select all WAN interfaces for the rate test.
- (2) Click **Start Test**.
- (3) After the rate test is complete, the system will display the test results, including latency, jitter, and packet loss.

Speed Test History				
Date	WAN	WAN1	WAN2	WAN4
2024-02-28 15:08:35	-	-	Down: 471Mbps Up: 160Mbps	-
2024-02-28 15:04:50	Down: 1Mbps Up: 38Mbps	-	-	-

4.5 Configuring the LAN Ports

4.5.1 Modifying the LAN Port IP Address

Choose **One-Device > Gateway > Config > Network > LAN > LAN Settings**.

Click **Edit**. In the dialog box that appears, enter the IP address and subnet mask, and then click **OK**. After you modify the LAN port IP address, you need to enter the new IP address in the browser to log in to the device again before you can configure and manage this device.

LAN Settings

+ Add

Delete Selected

☐	IP Address ?	Subnet Ma... ?	VLAN ID ?	Remarks	DHCP Serv... ?	Start IP Address ?	IP Count ?	Lease Time (Min) ?	Action
☐	192.168.2.1	255.255.255.0	Default VLAN	-	Enabled	192.168.2.1	254	8	Edit Delete

Edit

✕

* IP Address * Subnet Mask Remarks MAC Address DHCP Server ☒* Start IP Address * IP Count * Lease Time (Min)

DNS Server 192.168.2.1 ⓘ

Cancel

OK

4.5.2 Modifying the MAC Address

Choose **One-Device > Gateway > Config > Network > LAN > LAN Settings**.

If a static Address Resolution Protocol (ARP) entry (binding between IP address and MAC address of the gateway) is configured to prevent ARP attacks to clients in the LAN, the gateway IP address remains unchanged but its MAC address changes when the gateway is replaced. As a result, the client may fail to learn the gateway MAC address. You can modify the static ARP entry of the client to prevent this problem. You can also change the LAN port MAC address of the new device to the MAC address of the original device to allow clients in the LAN to access the Internet normally.

Click **Edit**. In the dialog box that appears, enter the MAC address, and then click **OK**. You do not need to modify the default LAN port MAC address unless otherwise specified.

Edit

×

* IP Address	192.168.2.1
* Subnet Mask	255.255.255.0
Remarks	Remarks
MAC Address	00:00:00:00:00:49
DHCP Server	☒
* Start IP Address	192.168.2.1
* IP Count	254
* Lease Time (Min)	8
DNS Server	192.168.2.1 ⓘ

4.6 Configuring VLAN

4.6.1 VLAN Overview

Virtual Local Area Network (VLAN) is a communication technology that divides a physical LAN into multiple logical broadcast domains. Each VLAN has independent broadcast domains. Hosts in the same VLAN can directly communicate with each other, while hosts in different VLANs cannot as they are isolated at Layer 2. Compared with traditional Ethernet, VLAN has the following advantages:

- Control broadcast storms: Broadcast packets can only be forwarded inside a VLAN. This saves bandwidth as the performance of a VLAN is not affected by broadcast storms of other VLANs.
- Enhance LAN security: As a VLAN is divided into multiple broadcast domains, packets of different VLANs in a LAN are isolated. Different VLAN users cannot directly communicate, enhancing network security.
- Simplify network management: The VLAN technology can be used to divide the same physical network into different logical networks. When the network topology changes, you only need to modify the VLAN configuration, simplifying network management.

4.6.2 Creating a VLAN

Note

The RG-EG710XS, RG-EG406XS and RG-EG406XS-P support a maximum of 128 VLANs.

Choose **One-Device > Gateway > Config > Network > LAN > LAN Settings**.

A LAN can be divided into multiple VLANs. Click **Add** and create a VLAN.

LAN Settings [+ Add](#) [Delete Selected](#)

☐	IP Address ?	Subnet Mask ?	VLAN ID ?	Remarks	DHCP Server ?	Start IP Address ?	IP Count ?	Lease Time (Min) ?	Action
☒	192.168.101.1	255.255.255.0	Default VLAN	-	Enabled	192.168.101.1	254	30	Edit Delete
☐	192.164.125.1	255.255.255.0	125	-	Enabled	192.164.125.1	254	30	Edit Delete
☐	192.168.211.1	255.255.255.0	211	-	Enabled	192.168.211.1	254	30	Edit Delete

Add



* IP Address

* Subnet Mask

* VLAN ID

Remarks

MAC Address

DHCP Server ☒

* Start IP Address

* IP Count

* Lease Time (Min)

DNS Server - 

Cancel

OK

Table 4-8 VLAN Configuration

Parameter	Description
IP Address	Configure an IP address for the VLAN interface. This IP address is used as the default gateway for the LAN devices that need to access the Internet.

Parameter	Description
Subnet Mask	Configure an IP address subnet mask for the VLAN interface.
VLAN ID	Configure the VLAN ID.
Remarks	Enter the VLAN description.
MAC Address	Configure an MAC address for the VLAN interface.
DHCP Server	Enable the DHCP server function. After this function is enabled, devices in the LAN can automatically obtain IP addresses. You also need to specify the start address for IP address allocation by the DHCP server, the number of IP addresses that can be allocated, and the address lease. You can also configure DHCP Options. For details, see Section 4.9.3 Configuring the DHCP Server .

Caution

The VLAN configuration is associated with the uplink configuration. Exercise caution when you perform this operation.

4.6.3 Configuring a Port VLAN

Choose **One-Device > Gateway > Config > Network > Port VLAN**.

This page displays the VLAN division of the current port. Create VLANs on the **LAN Settings** page and then configure the port based on the VLANs on this page. For details, see Section [4.6.2 Creating a VLAN](#).

Click the check box under a port and select the relationship between VLAN and port from the drop-down list box.

 Please choose [LAN Settings](#) to create a VLAN first and configure port settings based on the VLAN. 

 Connected
  Disconnected

 LAN0
  LAN1/WAN6
  LAN2/WAN5
  LAN3/WAN4
  LAN4/WAN3
  LAN5/WAN2
  LAN6/WAN1
  LAN7/WAN8
  LAN8/WAN7

Default VLAN

Untagged
 Untagged
 Untagged
 Untagged
 Non-added
 Untagged
 Untagged
 Untagged
 Untagged

Save

Non-added
 Tagged
 Untagged

- Untagged:** Configure the VLAN as the native VLAN of the port. When the port receives packets from the specified VLAN, the port removes the VLAN ID before forwarding the packets. When the port receives packets without a VLAN ID, the port adds this VLAN ID to the packets before forwarding them. You can set only one VLAN of the port to **Untagged**.

- **Tagged:** Configure the port to allow packets with this VLAN ID to pass. This VLAN is not the native VLAN. When the port receives packets from the specified VLAN, it forwards the packets with the original VLAN ID.
- **Non-added:** Configure the port to deny packets with this VLAN ID to pass. For example, if you set VLAN 10 and VLAN 20 to **Non-added** for port 2, port 2 will not receive packets from VLAN 10 and VLAN 20.

4.7 Configuring DNS

4.7.1 Local DNS

Choose **One-Device > Gateway > Config > Advanced > DNS > Local DNS**.

When the WAN interface runs DHCP or PPPoE protocol, the device automatically obtains the DNS server address. If the upper-layer device does not deliver the DNS server address or the DNS server needs to be changed, you can manually configure a new DNS server.

Local DNS server: Configure the DNS server address used by the local device. If multiple addresses exist, separate them with spaces.

 The device will get the DNS server address from the uplink device.

Local DNS server

Example: 8.8.8.8, each separated by a space.

Save

4.7.2 DNS Policy

Choose **One-Device > Gateway > Config > Advanced > DNS > DNS Policy**.

1. Static Domain Name Resolution

By configuring a DNS policy, you can resolve a specified domain name to the corresponding IP address, without relying on an external DNS server to perform domain name resolution. This can accelerate domain name resolution and mitigate security risks such as DNS hijacking.

(1) In the Static Domain Resolution section, click +Add.

Static Domain Resolution				
Search by Domain Name + Add Delete Selected				
☐	Domain Name ?	IP Address	Remarks	Status Action
☐	getRealIndex	[IPv4] 1.1.1.1		Enable  Edit Delete
Up to 100 entries can be added.				
Total 1 < 1 > 10/page				

(2) In the pop-up window that is displayed, enter the domain name and IP address.

Add

✕

* Domain Name 

IP Address +

IPv6 Address +

Remarks

Enable ☒

Cancel

OK

(3) Toggle on **Enable**, and click **OK**.

2. Dynamic Domain Name Resolution

After a DNS server is configured, the specified interface uses the configured DNS server to resolve domain names. In the **Dynamic Domain Resolution** section, click **+Add**. In the pop-up window that is displayed, enter the domain name, and select the interface. Enter the DNS server IP address and remarks if necessary, toggle on **Enable**, and click **OK**.

Caution

If an intranet server is configured for resolving specific domains, you are advised to not use the local gateway as the DNS server to prevent potential problems like recursive queries or other domain resolution issues.

Dynamic Domain Resolution

Search by Domain Name

**+ Add** Delete Selected

If an intranet server is configured for resolving specific domains, you are advised to not use the local gateway as the DNS server to prevent potential problems like recursive queries or other domain resolution issues.

☐	Domain Name 	Interface 	Server IP	Remarks	Status	Action

No Data

Up to 100 entries can be added.

Total 0



1



10/page



Add

✕

* Domain Name (?)

Interface (?)

Server IP +

Server IPv6 +

Remarks

Enable ☒

Cancel

OK

4.7.3 DNS Proxy

DNS proxy is optional configuration. By default, the device obtains the DNS server address from the upper-layer device.

Choose **One-Device > Gateway > Config > Advanced > DNS > DNS Proxy**.

DNS Proxy: By default, the DNS proxy is disabled, and the DNS address delivered by the ISP is used. If the DNS configuration is incorrect, the device may fail to parse domain names and network access will fail. It is recommended to keep the DNS proxy disabled.

DNS Server: Enable clients to access the Internet by using the DNS server address delivered by the upper-layer device. The default settings are recommended. After the DNS proxy is enabled, you need to enter the DNS server IP address. The DNS settings vary with the region. Consult the local ISP for details.

Enable (?) ☒* DNS Server (?)

Save

4.8 Configuring IPv6

4.8.1 IPv6 Overview

Internet Protocol Version 6 (IPv6) is the next-generation IP protocol designed by Internet Engineering Task Force (IETF) to substitute IPv4. It is used to compensate insufficient IPv4 network addresses.

4.8.2 IPv6 Basics

1. IPv6 Address Format

IPv6 extends 32-bit IPv4 address into 128 bits, providing wider address space than IPv4.

The basic format of an IPv6 address is X:X:X:X:X:X:X. It is represented as eight groups of four hexadecimal digits (0-9, A-F), each group representing 16 bits. The groups are separated by colons (:). In this format, each X represents a group of four hexadecimal digits.

Samples of IPv6 addresses are 2001:ABCD:1234:5678:AAAA:BBBB:1200:2100, 800:0:0:0:0:0:1, and 1080:0:0:0:8:800:200C:417A.

The digit 0 in an IPv6 address can be suppressed as follows:

- Leading zeros in each 16-bit field are suppressed. For example, 2001:00CD:0034:0078:000A:000B:1200:2100 can be suppressed to 2001:CD:34:78:A:B:1200:2100.
- The long sequence of consecutive all-zero fields in some IPv6 addresses can be replaced with two colons (::). For example, 800:0:0:0:0:0:0:1 can be represented as 800::1. The two colons (::) can be used only when all the 16 bits in a group are 0s, and it can appear only once in an IPv6 address.

2. IPv6 Prefix

IPv6 addresses are typically composed of two logical parts:

- Network prefix: n bits, corresponding to the network ID in IPv4 addresses
- interface ID: $(128 - n)$ bits, corresponding to the host ID in IPv4 addresses

A slash (/) is used to separate the length of network prefix from an IPv6 address. For example, 12AB::CD30:0:0:0:0/60 indicates that the 60-bit network prefix in the address is used for route selection. IPv6 prefixes can be obtained from the IPv6 DHCP server, along with IPv6 addresses. A downlink DHCP server can also automatically obtain IPv6 prefixes from its uplink DHCP server.

3. Special IPv6 Addresses

There are some special IPv6 addresses:

fe80::/8: loopback address, similar to the IPv4 address 169.254.0.0/16

fc00::/7: local address, similar to IPv4 addresses 10.0.0.0/8, 172.16.0.0/16, and 192.168.0.0/16

ff00::/12: multicast address, similar to the IPv4 address 224.0.0.0/8

4. NAT66

IPv6-to-IPv6 Network Address Translation (NAT66) is a process of converting the IPv6 address in the IPv6 data packet header into another IPv6 address. NAT66 can be implemented by converting the prefix in an IPv6 address in an IPv6 data packet header into another IPv6 address prefix. NAT66 enables mutual access between an internal network and an external public network.

4.8.3 IPv6 Address Allocation Modes

- Manual configuration: IPv6 addresses, prefixes, and other network parameters are configured manually.
- Stateless Address Autoconfiguration (SLAAC): The link-local address is generated based on the interface ID, and the IPv6 address is automatically allocated based on the prefix information in the Router Advertisement (RA) packet.

- Stateful address allocation (DHCPv6): Two DHCPv6 allocation methods are as follows:
 - Automatic DHCPv6 allocation: The DHCPv6 server automatically allocates IPv6 addresses, prefixes, and other network parameters.
 - Automatic allocation of DHCPv6 Prefix Delegations (PDs): The lower-layer network device submits a prefix allocation application to the upper-layer network device. The upper-layer network device allocates an appropriate address prefix to the lower-layer device. The lower-layer device further divides the obtained prefix (usually less than 64 bits) into 64-bit prefixed subnet segments and advertises the address prefixes to the user link directly connected to the IPv6 host through the RA packet, implementing automatic address configuration for hosts.

4.8.4 Enabling the IPv6 Function

Choose **One-Device > Gateway > Config > Network > IPv6 Address**.

Toggle on **Enable** to enable the IPv6 function.

Enable  

4.8.5 Configuring an IPv6 Address for the WAN Interface

Choose **One-Device > Gateway > Config > Network > IPv6 Address > WAN Settings**.

Caution

- When IPv6 is enabled, the MTU of the IPv4 WAN interface must be greater than 1280.
- If NAT66 is disabled, a public IPv6 address can access clients using the public IPv6 address on the intranet.

After you enable the IPv6 function, you can set related parameters on the **WAN Settings** tab. The number of **WAN** tabs indicates the number of WAN interfaces on the current device.

WAN0

WAN1

* Internet

DHCP/PPPoE

IPv6 Address

2400:0000:0000:0000/128

IPv6 Prefix

2400:0000:0000:0000:/62

Gateway

f::1

DNS Server

f::1

NAT66

Advanced Settings

Save

Table 4-9 IPv6 address configuration for WAN interface

Parameter	Description
Internet	Configure a method for the WAN interface to obtain an IPv6 address. ● DHCP/PPPoE: The current device functions as the DHCPv6 client, and it applies for an IPv6 address and prefix from the uplink network device. ● Static IP: You need to manually configure a static IPv6 address, gateway address, and DNS server. ● Null: The IPv6 function is disabled on the WAN interface.
IPv6 Address	When Internet is set to DHCP/PPPoE, the automatically obtained IPv6 address is displayed. When Internet is set to Static IP, you need to configure this parameter manually.
IPv6 Prefix	When Internet is set to DHCP/PPPoE, the IPv6 address prefix automatically obtained by the current device is displayed.
Gateway	When Internet is set to DHCP/PPPoE, the automatically obtained gateway address is displayed. When Internet is set to Static IP, you need to configure this parameter manually.
DNS Server	When Internet is set to DHCP/PPPoE, the automatically obtained DNS server address is displayed. When Internet is set to Static IP, you need to configure this parameter manually.
NAT66	If the current device cannot access the Internet through DHCP/PPPoE or cannot obtain the IPv6 prefix, you need to enable the NAT66 function to allocate IPv6 addresses to clients on the internal network.
Default Preference	Set the default route preference for the current line. A smaller value indicates a higher preference. For the same destination address, the route with the highest preference is selected as the optimal route.

4.8.6 Configuring an IPv6 Address for the LAN Port

Choose **One-Device > Gateway > Config > Network > IPv6 Address > LAN Settings**.

When the device accesses the Internet through DHCP, it can obtain LAN port IPv6 addresses from the uplink device and allocate IPv6 addresses to the clients in the LAN based on the IPv6 address prefix. If the uplink device cannot allocate an IPv6 address prefix to the device, you need to manually configure an IPv6 address prefix for the LAN port and enable the NAT66 function to allocate IPv6 addresses to the clients in the LAN. For details, see [Section 4.8.5 Configuring an IPv6 Address for the WAN Interface](#).

Click **Add** and configure a rule for assigning IPv6 addresses to clients in the VLAN.

LAN Settings ⓘ

+ Add

Delete Selected

☐	VLAN ID	IPv6 Assignment	Subnet Prefix Name	Subnet ID	Subnet Prefix Length	IPv6 Address/Prefix Length	Action

No Data

Up to 64 entries can be added.

Add

✕

* VLAN ID

Select

IPv6 Assignment ⓘ

Auto

IPv6 Address/Prefix Length ⓘ

Example: 2000::1

----- Advanced Settings -----

Subnet Prefix Name ⓘ

Default

* Subnet Prefix Length ⓘ

64

* Subnet ID ⓘ

0

* Lease Time (Min) ⓘ

30

DNS Server

Example: 2000::1, each separated by a comma.

Cancel

OK

Table 4-10 IPv6 address configuration for LAN port

Parameter	Description
VLAN ID	Configure a VLAN to which the rule applies. You can click the drop-down list box and select an existing VLAN. For details about how to create a VLAN, see Section 4.6 Configuring VLAN .
IPv6 Assignment	You can use either of the following methods to allocate IPv6 addresses to clients: ● Auto: Allocate IPv6 addresses to clients in DHCPv6 or SLAAC mode. ● DHCPv6: Allocate IPv6 addresses to clients through DHCPv6. ● SLAAC: Allocate IPv6 addresses to clients through SLAAC. ● Null: Do not allocate addresses to clients. You should select an allocation method based on the protocol supported by clients on the internal network. If you are not sure about the supported protocol, select Auto.

Parameter	Description
IPv6 Address/Prefix Length	Configure the IPv6 address and length for the VLAN. If the address length ranges from 48 to 64 bits, the address will also be used as the IPv6 address prefix.
Subnet Prefix Name	Configure the interface from which the prefix is obtained, for example, WAN_V6 . The default value is all interfaces. If Disable is selected, the IPv6 Address/Prefix Length field must be configured to assign IP addresses to hosts on the LAN.
Subnet Prefix Length	Specify the length of the subnet prefix. The value is in the range of 48 to 64.
Subnet ID	Configure the subnet ID in the hexadecimal format. The value 0 indicates auto increment.
Lease Time(Min)	Set the lease of the IPv6 address, in minutes.
DNS Server	Configure the IPv6 DNS server address.

4.8.7 Viewing the DHCPv6 Client

Choose **One-Device > Gateway > Config > Network > IPv6 Address > DHCPv6 Clients**.

When the device functions as a DHCPv6 server to allocate IPv6 addresses to clients, you can view the information about the client that obtains an IPv6 address from the device on the current page. The client information includes the host name, IPv6 address, remaining lease time, and DHCPv6 Unique Identifier (DUID).

Enter the DUID in the search bar and click  to quickly find relative information of the specified DHCPv6 client.

IPv6 Address

1. When IPv6 is enabled, the MTU of IPv4 WAN port need higher than 1280.

2. If you want to set more than one IPv6 LAN, please choose Port VLAN to set only one VLAN to Untagged and set the other VLANs to Non-added.

Enable

WAN Settings

LAN Settings

DHCPv6 Clients

Static DHCPv6

DHCPv6 Clients

You can view the DHCPv6 clients information on this page.

Search by IPv6 Address/DUID

+ Bind Selected

No.	Hostname	IPv6 Address	Remaining Lease Time(min)	DUID	Status
1	DESKTOP-3K15PA7	2000::1000	30	000100012a6eb9268cec4b83d7d6	Convert to Static IP

1

10/page

Total 1

- Click **Convert to Static IP** to convert the IP binding of a client with an IP address to static binding. Then the DHCP server assigns a static IP address to the client.
- Click **Bind Selected** to convert the IP binding of multiple clients with IP addresses to static binding. Then the DHCP server assigns static IP addresses to the clients.

4.8.8 Configuring the Static DHCPv6 Address

Configure the IPv6 address statically bound to the DUID of a client so that the client can obtain the specified address each time.

Choose **One-Device > Gateway > Config > Network > IPv6 Address > Static DHCPv6**.

Static IP Address List Search by IPv6 Address/DUID + Add Delete Selected

No.	IPv6 Address	DUID	Action
No Data			

Up to 200 entries can be added. Total 0 < 1 > 10/page

(1) Click **Add**.

Add ×

* IPv6 Address

* DUID

Cancel OK

(2) Enter the IPv6 address and DUID.

(3) Click **OK**.

4.8.9 Configuring the IPv6 Neighbor List

In IPv6, Neighbor Discovery Protocol (NDP) is an important basic protocol. NDP replaces the ARP and ICMP route discovery protocols of IPv4, and supports the following functions: address resolution, neighbor status tracking, duplicate address detection, router discovery, and redirection.

Choose **One-Device > Gateway > Config > Security > IPv6 Neighbor List**.

IPv6 Neighbor List Search by IP Address/MAC Addr + Add Bind Selected Delete Selected

No.	IPv6 Address	MAC Address	Type	Ethernet status	Action
1		7C 1c	Dynamic	WAN	Bind
2		3 1	Dynamic	WAN	Bind
3		7C f	Dynamic	WAN	Bind
4		3C f	Dynamic	WAN	Bind
5		7 01	Dynamic	WAN	Bind

(1) Click **Add** and manually add the interface, IPv6 address and MAC address of the neighbor.

✕

Add

* Interface Select

* IPv6 Address Please enter an IPv6 address.

* MAC Address Please enter a MAC address.

Cancel
OK

- (2) Select the MAC address and IP address to be bound, and click **Bind** in the **Action** column to bind the IP address to the MAC address to prevent ND attacks.

IPv6 Neighbor List ↻

Search by IP Address/MAC Addr

+ Add
Bind Selected
Delete Selected

☐	No.	IPv6 Address	MAC Address	Type	Ethernet status	Action
☐	1	fe80::...	7C:...	Dynamic	WAN	Bind
☐	2	...	30:...	Dynamic	WAN	Bind

4.9 Configuring a DHCP Server

4.9.1 DHCP Server Overview

After the DHCP server function is enabled in the LAN, the device can automatically deliver IP addresses to clients, so that clients connected to the LAN ports of the device or connected to Wi-Fi can access the Internet using the obtained addresses.

See Section [4.8.6 Configuring an IPv6 Address for the LAN Port](#) for more information about the DHCPv6 server function.

4.9.2 Address Allocation Mechanism

The DHCP server allocates an IP address to a client in the following way:

- (1) When the device receives an IP address request from a DHCP client, the device searches the DHCP static address allocation list. If the MAC address of the DHCP client is in the DHCP static address allocation list, the device allocates the corresponding IP address to the DHCP client.
- (2) If the MAC address of the DHCP client is not in the DHCP static address allocation list or the IP address that the DHCP client applies is not in the same network segment as the LAN port IP address, the device selects an IP address not used from the address pool and allocates the address to the DHCP client.
- (3) If no IP address in the address pool is allocable, the client will fail to obtain an IP address.

4.9.3 Configuring the DHCP Server

1. Configuring Basic Parameters

Choose **One-Device > Gateway > Config > Network > LAN > LAN Settings**.

Select the VLAN to which the DHCP function needs to be configured and click **Edit**.

LAN Settings + Add Delete Selected

☐	IP Address ?	Subnet Ma... ?	VLAN ID ?	Remarks	DHCP Serv... ?	Start IP Address ?	IP Count ?	Lease Time (Min) ?	Action
☐	192.168.2.1	255.255.255.0	Default VLAN	-	Enabled	192.168.2.1	254	8	Edit Delete
☐	5.5.5.5	255.255.255.0	55	-	Enabled	5.5.5.1	254	30	Edit Delete

Up to 8 entries can be added.

Edit



* IP Address

* Subnet Mask

Remarks

MAC Address

DHCP Server ☒

* Start IP Address

* IP Count

* Lease Time (Min)

DNS Server 192.168.2.1

Cancel

OK

DHCP Server: The DHCP server function is enabled by default in the router mode. You are advised to enable the function if the device is used as the sole router in the network. When multiple routers are connected to the upper-layer device through LAN ports, disable this function.

 Caution

If the DHCP server function is disabled on all devices in the network, clients cannot automatically obtain IP addresses. You need to enable the DHCP server function on one device or manually configure a static IP address for each client for Internet access.

Start IP Address: Enter the start IP address of the DHCP address pool. A client obtains an IP address from the address pool. If all the addresses in the address pool are used up, no IP address can be obtained from the address pool.

IP Count: Enter the number of IP addresses in the address pool.

Lease Time (Min): Enter the address lease term. When a client is connected, the leased IP address is automatically renewed. If a leased IP address is not renewed due to client disconnection or network instability, the IP address will be reclaimed after the lease term expires. After the client connection is restored, the client can request an IP address again. The default lease term is 30 minutes.

2. Configuring DHCP Option

Choose **One-Device > Gateway > Config > Network > LAN > DHCP**.

The DHCP Option configuration is shared by all LAN ports. You can configure DHCP Option based on actual needs.

DNS Server ?	Example: 8.8.8.8, each separated by a space.
Option 43 ?	Enter an IP address or hexadecimal number. 
Option 138 ?	Example: 1.1.1.1
Option 150 ?	Example: 1.1.1.1, each separated by a space.
Gateway	Example: 1.1.1.1
Domain Name	
Save	

Table 4-11 DHCP Option configuration

Parameter	Description
DNS Server	Enter the DNS server address provided by the ISP.

Parameter	Description
Option 43	When the AC (wireless controller) and the AP are not in the same LAN, the AP cannot discover the AC through broadcast after obtaining an IP address from the DHCP server. To enable the AP to discover the AC, you need to configure Option 43 carried in the DHCP response packet on the DHCP server.
Option 138	Enter the IP address of the AC. Similar to Option 43, when the AC and AP are not in the same LAN, you can configure Option 138 to enable the AP to obtain the IPv4 address of the AC.
Option 150	Enter the IP address of the TFTP server. The TFTP server allocates addresses to clients.
Gateway	Configure the IP address of the default gateway or default route that the DHCP server assigns to clients. The default gateway is the next hop address used by a client to send data packets to an external network. It is responsible for forwarding the data packets to the target network.
Domain Name	When deploying a server on the internal network, you can set a domain name to allow intranet clients to access the server. After the configuration is completed, intranet clients can access the server by using the host name and domain name, thereby avoiding access failure due to changes in the server's IP address.

4.9.4 Viewing the DHCP Client

Choose **One-Device > Gateway > Config > Network > LAN > DHCP Clients**.

View the client addresses automatically allocated by thorough DHCP. Find the target client and click **Convert to Static IP** in the **Status** column, or select desired clients and click **Batch Add**. The dynamic address allocation relationship is added to the static address allocation list, so that the host can obtain the bound IP address for each connection. For details on how to view the static address allocation list, see Section [4.9.5 Configuring Static IP Addresses](#).

DHCP Clients					
Search by Hostname/IP Address, Refresh + Batch Add					
☐	No.	Device Name	IP Address	MAC Address	Remaining Lease Time(min) Status
☐	1	DESKTOP-PJE70H1 ?	192.168.2.2	f8-00-27-00-00-04	6 Convert to Static IP

Up to 500 static binding entries are supported.

Total 1 10/page

4.9.5 Configuring Static IP Addresses

Choose **One-Device > Gateway > Config > Network > LAN Static IP Addresses**.

The page displays all configured static IP addresses.

Click **Add**. In the pop-up window, enter the device name, MAC address and IP address of the client to be bound, and click **OK**. After a static IP address is bound, the bound IP address will be obtained each time the client connects to the network.

Static IP Address List

[Batch Import](#) [Batch Export](#) [+ Add](#) [Delete Selected](#)

☐	No.	Device Name	IP Address	MAC Address	Action
☐	1	Xiaomi10s111 🔗	192.168.2.8	86: b	Edit Delete

Up to 500 entries can be added.

Total 1 [<](#) **1** [>](#) 10/page

Add



Device Name

* IP Address

* MAC Address

Click **Batch Export** to export all existing static IP addresses.

Click **Batch Import** to import static IP addresses in the file to the device. The entries with the same MAC address as those in the list will be overwritten by the configurations in the file, and the other configurations in the list will not be changed. The other configurations in the file will be added to the list in the form of new entries.

Preview of Configuration



1. When the existing configuration has the same MAC address or IP address as the uploaded data, the existing configuration will be changed.
2. The uploaded data has the same MAC address or IP address, and the data configured later will be imported.
3. Configurations that do not meet the validation rules will not be imported.

Username	MAC Address	IP Address	Is It Possible to Import
0	a	192.168.110.249	Passed
5	0	192.168.110.220	Passed
0	a	192.168.110.61	Passed
c	4	192.168.110.77	Passed
8	8	192.168.110.29	Passed
3	6	192.168.110.14	Passed
c	c	192.168.110.178	Passed
c	3	192.168.110.232	Passed
e	2	192.168.110.165	Passed
c	7	192.168.110.102	Passed

Total 30



1

2

3



10/page

Cancel

OK

4.10 Configuring Routes

4.10.1 Configuring Static Routes

Static routes are manually configured by the user. When a data packet matches a static route, the packet will be forwarded according to the specified forwarding mode.



Caution

Static routes cannot automatically adapt to changes of the network topology. When the network topology changes, you need to reconfigure the static routes.

1. Configuring IPv4 Static Routing

Choose **One-Device > Gateway > Config > Advanced > Routing > Static Routing**.

Click **Add**. In the dialog box that appears, enter the destination address, subnet mask, outbound interface, and next-hop IP address to create a static route.

Static Route List						+ Add	Delete Selected
☐	Dest IP Address	Subnet Mask	Outbound Interface	Next Hop	Reachable	Action	
☐	10.52.48.0	255.255.255.0	WAN0	10.52.48.43	Yes	Edit	Delete
Up to 100 entries can be added.						Total 1	1 10/page

Add
×

* Dest IP Address

* Subnet Mask

* Outbound Interface

Select ▼

* Next Hop

Cancel

OK

Table 4-12 Static route configuration

Parameter	Description
Dest IP Address	Specify the destination network to which the data packet is to be sent. The device matches the data packet based on the destination address and subnet mask.
Subnet Mask	Specify the subnet mask of the destination network. The device matches the data packet based on the destination address and subnet mask.
Outbound Interface	Specify the interface that forwards the data packet.
Next Hop	Specify the IP address of the next hop in the route for the data packet. If the outbound interface accesses the Internet through PPPoE dialing, you do not need to configure the next-hop address.

After a static route is created, you can find the relevant route configuration and reachability status in the static route list. The **Reachable** parameter specifies whether the next hop is reachable, based on which you can determine whether the route takes effect. If the value is **No**, check whether the outbound interface in the current route can ping the next-hop address.

Static Route List ⓘ

+ Add
Delete Selected

☐	Dest IP Address ⓘ	Subnet Mask ⓘ	Outbound Interface ⓘ	Next Hop ⓘ	Reachable ⓘ	Action
☐	10.52.48.0	255.255.255.0	WAN0			
☐	192.168.110.0	255.255.255.0	WAN0	192.168.10.1	No ⓘ	Edit Delete

The route is unreachable. Please initiate a Ping test from the outbound interface to the next hop.

Up to 100 entries can be added.

Total 2
1
10/page

2. Configuring the IPv6 Static Route

Choose **One-Device > Gateway > Config > Advanced > Routing > IPv6 Static Routing**.

Static Route List   [+ Add](#) [Delete Selected](#)

☐	IPv6 Address	Prefix Length	Interface 	Next Hop 	Action
No Data					

Up to 100 entries can be added. Total 0  **1**  10/page 

(1) Click **Add**.

Add
×

* IPv6 Address/Prefix

Length 

* Interface  

* Next Hop 

(2) Configure an IPv6 static route of the device.

Table 4-13 Description of IPv6 Static Routing Configuration Parameters

Parameter	Description
IPv6 Address/Prefix Length	Destination network of the packet. The destination address of the packet is matched according to the IPv6 address and prefix length.
Outbound Interface	Interface that forwards the packet.
Next Hop	IP address of the next routing node to which the packet is sent.

(3) Click **OK**.

4.10.2 Configuring PBR

Policy-based routing (PBR) is a mechanism for routing and forwarding based on user-specified policies. When a router forwards data packets, it filters the packets according to the configured rules, and then forwards the matched packets according to the specified forwarding policy. The PBR feature enables the device to formulate

rules according to specific fields (source or destination IP address and protocol type) in the data packets, and forward the data packets from a specific interface.

In a multi-line scenario, if the device is connected to the Internet and the internal network through different lines, the traffic will be evenly routed over the lines if no routing settings are available. In this case, access data to the internal network may be sent to the external network, or access data to the external network may be sent to the internal network, resulting in network exceptions. To prevent these exceptions, you need to configure PBR to control data isolation and forwarding on the internal and external networks.

The device can forward data packets using either of the following three policies: PBR, address-based routing, and static routing. When all the policies exist, PBR, static routing, and address-based routing have descending order in priority. For details on address-based routing, see [Section 4.3.7 Configuring the Multi-Line Load Balancing Mode](#).

1. Configuring IPv4 PBR

Choose **One-Device > Gateway > Config > Advanced > Routing > PBR**.

Click **Add** to add a PBR rule.

Route Priority: PBR > > URL > Static Routing > ISP Routing.

PBR List ⓘ

+ Add

Delete Selected

☐	Name ⓘ	Protocol Type ⓘ	Src IP Addr... ⓘ	Dest IP Address ⓘ	Src Port Range ⓘ	Dest Port Range ⓘ	Outbound Interface ⓘ	Traffic Assurance	Effective State	Action
No Data										

Up to 30 entries can be added.

Total 0 < 1 > 10/page ▾

Add PBR



* Name 

Protocol Type 

Src IP/IP Range 

Dest IP/IP Range 

Outbound Interface 

Traffic Assurance  ☒

Effective State ☒

Cancel

OK

Table 4-14 Description of IPv4 PBR Configuration Parameters

Parameter	Description
Name	Specify the name of the PBR rule, which uniquely identifies a PBR rule. The name must be unique for each rule.
Protocol Type	Specify the protocol to which the PBR rule is effective. You can set this parameter to IP , ICMP , UDP , TCP , or Custom .
Protocol Number	When Protocol Type is set to Custom , you need to enter the protocol number.
Src IP/IP Range	Configure the source IP address or IP address range for matching PBR entries. The default value is All IP Addresses. ● All IP Addresses: Match all the source IP addresses. ● Custom: Match the source IP addresses in the specified IP range.
Custom Src IP	When Src IP/IP Range is set to Custom , you need to enter a single source IP address or a source IP range.

Parameter	Description
Dest IP/IP Range	Configure the destination IP address or IP address range for matching PBR entries. The default value is All IP Addresses. ● All IP Addresses: Match all the destination IP addresses. ● Custom: Match the destination IP addresses in the specified IP range.
Custom Dest IP	When Dest IP/IP Range is set to Custom, you need to enter a destination source IP address or a destination IP range.
Src Port Range	This parameter is available only when Protocol Type is set to TCP or UDP. This parameter specifies the source port range for packet matching using PBR.
Dest Port Range	This parameter is available only when Protocol Type is set to TCP or UDP. This parameter specifies the destination port range for packet matching using PBR.
Outbound Interface	Specify the interface that forwards the data packet based on the hit PBR rule.
Traffic Assurance	When an outbound interface is unreachable, the traffic will be automatically routed to other reachable outbound interfaces.
Effective State	Turn on Effective State to specify whether to enable the PBR rule. If Effective State is turned off, this rule does not take effect.

Note

If you want to restrict the access device to access only the specified internal network, you can set the outbound interface in the corresponding route to the WAN interface in the private line network. For details on how to set the private line network, see Section [4.3.4 Configuring the Private Line](#).

All the created PBR policies are displayed in the PBR list, with the latest policy listed on the top. The device matches the policies according to their sorting in the list. You can manually adjust the policy matching sequence by clicking  or  in the **Match Order** column.

PBR List 											+ Add	Delete Selected
☐	Name 	Protocol Type 	Src IP Address 	Dest IP Address 	Src Port Range 	Dest Port Range 	Outbound Interface 	Traffic Assurance	Effective State	Match Order 	Action	
☐	test2	IP	1.1.1.1	2.2.2.2	-	-	WAN0	Enable	Enable 		Edit	Delete
☐	test1	IP	All IP Addresses	All IP Addresses	-	-	WAN0	Enable	Enable 		Edit	Delete

Up to 30 entries can be added.

Total 2  **1**  10/page

2. Configuring IPv6 PBR

Choose **One-Device > Gateway > Config > Advanced > Routing > IPv6 PBR**.

PBR List ?

+ Add
Delete Selected

☐	Name ?	Protocol Type ?	Src IP Address	Dest IP Address	Src Port Range ?	Dest Port Range ?	Outbound Interface ?	Traffic Assurance	Effective State	Action
No Data										

Up to 30 entries can be added.

Total 0 < 1 > 10/page ▼

Click **Add** to add a PBR rule.

Add PBR



* Name ?

Protocol Type ?

Src IP/IP Range ?

Dest IP/IP Range ?

Outbound Interface ?

Traffic Assurance ? ☒

Effective State ☒

Cancel

OK

Table 4-15 Description of IPv6 PBR Configuration Parameters

Parameter	Description
Name	Specify the name of the PBR rule, which uniquely identifies a PBR rule. The name must be unique for each rule.
Protocol Type	Specify the protocol to which the PBR rule is effective. You can set this parameter to IP , ICMPv6 , UDP , TCP , or Custom .
Protocol Number	When Protocol Type is set to Custom , you need to enter the protocol number.
Src IP/IP Range	Configure the source IP address or IP address range for matching PBR entries. The default value is All IP Addresses. ● All IP Addresses: Match all the source IP addresses. ● Custom: Match the source IP addresses in the specified IP range.

Parameter	Description
Custom Src IP	When Src IP/IP Range is set to Custom , you need to enter a single source IP address or a source IP range.
Dest IP/IP Range	Configure the destination IP address or IP address range for matching PBR entries. The default value is All IP Addresses. ● All IP Addresses: Match all the destination IP addresses. ● Custom: Match the destination IP addresses in the specified IP range.
Custom Dest IP	When Dest IP/IP Range is set to Custom, you need to enter a destination source IP address or a destination IP range.
Src Port Range	This parameter is available only when Protocol Type is set to TCP or UDP. This parameter specifies the source port range for packet matching using PBR.
Dest Port Range	This parameter is available only when Protocol Type is set to TCP or UDP. This parameter specifies the destination port range for packet matching using PBR.
Outbound Interface	Specify the interface that forwards the data packet based on the hit PBR rule.
Traffic Assurance	When an outbound interface is unreachable, the traffic will be automatically routed to other reachable outbound interfaces.
Effective State	Turn on Effective State to specify whether to enable the PBR rule. If Effective State is turned off, this rule does not take effect.

Note

If you want to restrict the access device to access only the specified internal network, you can set the outbound interface in the corresponding route to the WAN interface in the private line network. For details on how to set the private line network, see Section [4.3.4 Configuring the Private Line](#).

All the created PBR policies are displayed in the PBR list, with the latest policy listed on the top. The device matches the policies according to their sorting in the list. You can manually adjust the policy matching sequence by clicking  or  in the **Match Order** column.

PBR List 											+ Add	Delete Selected
☐	Name 	Protocol Type 	Src IP Address	Dest IP Address	Src Port Range 	Dest Port Range 	Outbound Interface 	Traffic Assurance	Effective State	Match Order	Action	
☐	test2	IP	2000::1	All IP Addresses	-	-	WAN0	Enable	Enable 	↓	Edit	Delete
☐	test1	IP	All IP Addresses	All IP Addresses	-	-	WAN0	Enable	Enable 	↑	Edit	Delete

Up to 30 entries can be added.

Total 2  **1**  10/page 

3. Typical Configuration Example

- Networking Requirements

Two lines with different bandwidths are deployed for an enterprise. Line A (WAN 1) is used for access to the Internet and Line B (WAN 2) is used for access to the specific internal network (10.1.1.0/24). The enterprise wants to configure PBR to guarantee correct data flows between the internal and external networks, isolate devices in the specified address range (172.26.31.1 to 172.26.31.200) from the external network, and allow these devices to access the specific internal network only.

- Configuration Roadmap

- Configure the private line.

- Add a PBR policy for access to the internal network.

- Add a PBR policy for access to the external network.

- Add a PBR policy to restrict specific devices to access the internal network only.

- Configuration Steps

(1) Configure WAN 2 as the private line for the internal network.

When you configure networking parameters for WAN 2 port, click **Advanced Settings**, turn on **Private Line**, and click **Save**. For details, see Section [4.3.4 Configuring the Private Line](#).

----- Advanced Settings -----

* MTU (?) [MTU Detection](#)

* MAC Address (?)

802.1Q Tag ☐

Private Line (?) ☒

NAT Mode (?) ☒

(2) Add a PBR policy to forward data packets destined to the external network through WAN 1 port.

Choose **One-Device > Gateway > Config > Advanced > Routing > PBR** and click **Add**. In the dialog box that appears, create a PBR policy and set **Outbound Interface** to **WAN1**.

Add PBR



* Name (?)

Protocol Type (?)

Src IP/IP Range (?)

Dest IP/IP Range (?)

Outbound Interface (?)

Traffic Assurance (?) ☒

Effective State ☒

Cancel

OK

- (3) Add a PBR policy to forward data packets destined to the internal network through WAN 2 port.
In this policy, set **Custom Dest IP** to 10.1.1.1-10.1.1.254 and **Outbound Interface** to WAN2.

Add PBR



* Name (?)

Protocol Type (?)

Src IP/IP Range (?)

Dest IP/IP Range (?)

* Custom Dest IP

Outbound Interface (?)

Traffic Assurance (?) ☒

Effective State ☒

Cancel

OK

- (4) Add a PBR policy to restrict devices in the IP range 172.26.31.1 to 172.26.31.200 to access the internal private line only.

In this policy, set **Src IP/IP Range** to **Custom**, **Custom Src IP** to 172.26.31.1-172.26.31.200, and **Outbound Interface** to WAN2.

Add PBR

* Name ? Access only Intranet

Protocol Type ? IP

Src IP/IP Range ? Custom

* Custom Src IP 172.26.31.1-172.26.31.200

Dest IP/IP Range ? All IP Addresses

Outbound Interface ? WAN2

Traffic Assurance ? ☒

Effective State ☒

Cancel

OK

4.10.3 Configuring RIP

Routing Information Protocol (RIP) is applicable to small and medium-sized networks and is a dynamic routing protocol that is easy to configure. RIP measures the network distance based on the number of hops and selects a route based on the distance. RIP uses UDP port 520 to exchange the routing information.

1. Configuring RIP Basic Functions

Choose **One-Device > Gateway > Config > Advanced > Routing > RIP Settings**

Click **Add** and configure the network segment and interface.

RIP Settings | Port Settings | Advanced | Neighbor Info

Network Segment/Port List ?
 + Add
Delete Selected

No.	Network Segment/Port	Auth Mode	Action
No Data			

Add ×

Type ☒ Network Segment ☐ Port

* Network Segment

Add ×

Type ☐ Network Segment ☒ Port

* Port

Auth Mode

* Auth Key

Table 4-16 RIP Configuration Parameters

Parameter	Description
Type	● Network Segment: Enable RIP in the specified network segment. The IP addresses of this network segment are added to the RIP routing table. The device and its RIP-enabled neighbor devices learn the routing table from each other. ● Port: Enable RIP on the specified port. All the IP addresses of this port are added to the RIP routing table. The device and its RIP-enabled neighbor devices learn the routing table from each other.
Network Segment	Enter the network segment, for example, 10.1.0.0/24 , when Type is set to Network Segment . RIP will be enabled on all interfaces of the device covered by this network segment.
Port	Select a VLAN interface or physical port when Type is set to Port .
Auth Mode	● No Authentication: The protocol packets are not authenticated.

Parameter	Description
	● Encrypted Text: The protocol packets are authenticated, and the authentication key is transmitted with the protocol packets in the form of encrypted text. ● Plain Text: The protocol packets are authenticated, and the authentication key is transmitted with the protocol packets in the form of plain text.
Auth Key	Enter the authentication key to authenticate protocol packets when Auth Mode is set to Encrypted Text or Plain Text .

2. Configuring the RIP Port

Choose **One-Device > Gateway > Config > Advanced > Routing > RIP Settings > Port Settings**

RIP Settings	Port Settings	Advanced	Neighbor Info

Port Name	Rx Status	Tx Status	Poison Reverse	v2 Broadcast Packet	Auth Mode	Auth Key	Action
WAN	v2	v2	Off	Off	Encrypted Text	ruijie123	Edit

Table 4-17 Configuration Parameters in the Port List

Parameter	Description
Port Name	Name of the port where RIP is enabled.
Rx Status	RIP version of packets currently received.
Tx Status	RIP version of packets currently transmitted.
Poison Reverse	After the port learns the route, the route overhead is set to 16 (indicating that the route is unreachable), and the route is sent back to the neighbor from the original port to avoid a loop.
v2 Broadcast Packet	When a neighbor does not support multicast, broadcast packets can be sent. You are advised to disable RIPv2 broadcast packets to improve network performance.
Auth Mode	No Authentication: The protocol packets are not authenticated. Encrypted Text: The protocol packets are authenticated, and the authentication key is transmitted with the protocol packets in the form of encrypted text. Plain Text: The protocol packets are authenticated, and the authentication key is transmitted with the protocol packets in the form of plain text.
Auth Key	Enter the authentication key to authenticate protocol packets when Auth Mode is set to Encrypted Text or Plain Text .

Parameter	Description
Action	Click Edit to modify RIP settings of the port.

3. Configuring the RIP Global Configuration

Choose **One-Device > Gateway > Config > Advanced > Routing > RIP Settings > Advanced**, click **Edit Config**, and configure RIP global configuration parameters.

RIP Settings
Port Settings
Advanced
Neighbor Info

RIP Global Config ?

Edit Config

RIP Version	Equal-cost Load Balancing	Route Advertisement	Administrative Distance	Update Timer	Invalid Timer	Flush Timer
Default	Off	Off	1 (Default)	30 s	180 s	120 s

Edit Config

RIP Version Default ?

Equal-cost Load ☐
Balancing

Route Advertisement ☐

Administrative 1 (Default)
Distance

* Update Timer 30 s (5-2147483647)

* Invalid Timer 180 s (5-2147483647)

* Flush Timer 120 s (5-2147483647)

Cancel

OK

Table 4-18 RIP Global Configuration Parameters

Parameter	Description
RIP Version	● Default: Select RIPv2 for sending packets and RIPv1/v2 for receiving packets. ● V1: Select RIPv1 for sending and receiving packets. ● V2: Select RIPv2 for sending and receiving packets.
Route Advertisement	After route advertisement is enabled, the current device generates a default route and sends it to the neighbor.
Administrative Distance	Redistribute routes of other protocols to the RIP domain so that RIP can interwork with other routing domains.
Update Timer	RIP update cycle. The routing information is updated every 30 seconds by default.
Invalid Timer	If no update is received before a route becomes invalid, the route is considered unreachable. The default value is 180 seconds.
Flush Timer	If no update is received before the flush timer of an invalid route expires, the route is completely deleted from the RIP routing table. The default value is 120 seconds.

4. Configuring the RIP Route Redistribution List

Redistribute routes of other protocols to the RIP domain so that RIP can interwork with other routing domains.

Choose **One-Device > Gateway > Config > Advanced > Routing > RIP Settings > Advanced**, click **Add** in **Route Redistribution List**, and select the type and administrative distance.

Route Redistribution List ?

+ Add

Delete Selected

☐	Type	Administrative Distance	Instance ID	Action

No Data

Add
×

*
Type

OSPF Routing
 ▼

*

Administrative
Distance

0 (Administrative Distance)
 ▼

*

Instance ID

Select
 ▼

Cancel

OK

Table 4-19 RIP Route Redistribution Parameters

Parameter	Description
Type	Configure the type of routes that are learned by a routing protocol and then redistributed to RIP. The types include direct routes, OSPF routes, and static routes.
Administrative Distance	The device converts the metric of the routes learned from other routing protocols into the metric used by the target protocol so that the target protocol can select the optimal route. A smaller administrative distance indicates a higher priority. The default value is 0. The value ranges from 0 to 16.
Instance ID	Select the instance ID of OSPF that needs to be redistributed. OSPFv2 needs to be enabled on the local device.

5. Configuring the Passive Interface

If an interface is configured as a passive interface, it will suppress RIP update packets. If the connected peer device does not run RIP, you are advised to enable the passive interface.

Choose **One-Device > Gateway > Config > Advanced > Routing > RIP Settings > Advanced**, click **Add** in **Passive Interface** and select a passive interface.

Passive Interface ?

+ Add

Delete Selected

□	Port Name	Action

No Data

Add ×

* Passive Interface

Select ▼

Cancel

OK

6. Configuring the Neighbor Route

When the router cannot process broadcast packets, another router can be designated as the neighbor to establish a RIP direct link.

Choose **One-Device > Gateway > Config > Advanced > Routing > RIP Settings > Advanced**, click **Add** in **Neighbor Route**, and enter the IP address of the neighbor router.

Neighbor Route ?

+ Add

Delete Selected

☐	Address	Action
No Data		

Add ×

* Neighbor Route

Cancel

OK

7. Viewing the Neighbor Information

Choose **One-Device > Gateway > Config > Advanced > Routing > RIP Settings > Neighbor Info**.

The neighbor list displays information about neighbors of the device, including the neighbor address, neighbor protocol version, local address, connected interface, number of received error packets, and number of received error routes.

RIP Settings	Port Settings	Advanced	Neighbor Info			
Neighbor Address	Neighbor Protocol Version	Local Address	Connected Interface	Rx Error Packets	Rx Error Routes	
10.52.48.4	0	10.52.48.43	--	28	0	
Total 1				< 1 >	10/page	

4.10.4 Configuring RIPng

RIP Next Generation (RIPng) provides the routing function for IPv6 networks.

RIPng uses UDP port 512 to exchange the routing information.

1. Configuring RIPng Basic Functions

Choose **One-Device > Gateway > Config > Advanced > Routing > RIPng Settings**

Click **Add**, set **Type** to **Network Segment** or **Port**, and specify the network segment or port accordingly.

RIPng Settings	Port Settings	Advanced	Neighbor Info

Network Segment/Port List ⓘ + Add Delete Selected

☐	No.	Network Segment/Port	Action
No Data			

Add

×

Type ☒ Network Segment ☐ Port

* Network Segment ⓘ

Example: 2000::1

Cancel

OK

Add

✕

Type ☐ Network Segment ☒ Port* Port ▼

Cancel

OK

Table 4-20 RIPng Configuration Parameters

Parameter	Description
Type	● Network Segment: Enable RIP in the specified network segment. The IP addresses of this network segment are added to the RIP routing table, and the device and its RIP-enabled neighbor devices learn the routing table from each other. ● Port: Enable RIP on the specified port. All the IP addresses of this port are added to the RIP routing table, and the device and its RIP-enabled neighbor devices learn the routing table from each other.
Network Segment	Enter the IPv6 address and prefix length when Type is set to Network Segment . RIPng will be enabled on all interfaces of the device covered by this network segment.
Port	Select a VLAN interface or physical port when Type is set to Port .

2. Configuring the RIPng Port

RIPng poison reverse: After the port learns the route, the route overhead is set to **16** (indicating that the route is unreachable), and the route is sent back to the neighbor from the original port to avoid a loop.

Choose **One-Device > Gateway > Config > Advanced > Routing > RIPng Settings > Port Settings**, click **Edit**, and enable IPv6 poison reverse.

RIPng Settings	Port Settings	Advanced	Neighbor Info
Port Name	IPv6 Poison Reverse	Action	
VLAN 55	Off	Edit	

Edit

✕

* Port Name

VLAN 55

▼

IPv6 Poison Reverse



Cancel

OK

3. Configuring the RIPng Global Configuration

Choose **One-Device** > **Gateway** > **Config** > **Advanced** > **Routing** > **RIPng Settings** > **Advanced**, click **Edit Config** in **RIPng Global Config**, and configure RIPng global configuration parameters.

Equal-cost Load Balancing	Route Advertisement	Administrative Distance	Update Timer	Invalid Timer	Flush Timer
Off	Off	1 (Default)	30 s	180 s	120 s

RIPng Global Config ? [Edit Config](#)

Edit Config

✕

Equal-cost Load



Balancing

Route Advertisement



Administrative

1 (Default)

▼

Distance

* Update Timer

30

s (1-65535)

* Invalid Timer

180

s (1-65535)

* Flush Timer

120

s (1-65535)

Cancel

OK

Table 4-21 RIPng Global Configuration Parameters

Parameter	Description
Equal-cost Load Balancing	After this function is enabled, equal-cost routes are automatically balanced and forwarded with a weight of 1:1.
Route Advertisement	After this function is enabled, the current device generates a default route and sends it to the neighbor.
Administrative Distance	Routes of other protocols are redistributed to the RIP domain so that RIP can communicate with other routing domains.
Update Timer	RIP update cycle. The routing information is updated every 30 seconds by default.
Invalid Timer	If no update is received before a route becomes invalid, the route is considered unreachable. The default value is 180 seconds.
Flush Timer	If no update is received before the flush timer of an invalid route expires, the route is completely deleted from the RIP routing table. The default value is 120 seconds.

4. Configuring the RIPng Route Redistribution List

Redistribute routes of other protocols to the RIPng domain to interwork with other routing domains.

Choose **One-Device > Gateway > Config > Advanced > Routing > RIPng Settings > Advanced**, click **Add** in **Route Redistribution List**, and configure RIPng route redistribution.

Route Redistribution List ?

+ Add

Delete Selected

☐	Type	Administrative Distance	Action
No Data			

Add

×

* Type

Select

▼

* Administrative

0 (Administrative Distance)

▼

Distance

Cancel

OK

Table 4-22 RIP Route Redistribution Parameters

Parameter	Description
Type	Configure the type of routes that are learned by a routing protocol and then redistributed to RIP. The types include direct routes, OSPF routes, and static routes.
Administrative Distance	The device converts the metric of the routes learned from other routing protocols into the metric used by the target protocol so that the target protocol can select the optimal route. A smaller administrative distance indicates a higher priority. The default value is 0. The value ranges from 0 to 16.

5. Configuring the RIPng Passive Interface

If an interface is configured as a passive interface, it will suppress RIPng update packets. If the connected peer device does not run RIP, you are advised to enable the passive interface.

Choose **One-Device > Gateway > Config > Advanced > Routing > RIPng Settings > Advanced**, click **Add** in **Passive Interface**, and select a passive interface.

Passive Interface ⓘ + Add Delete Selected

☐	Port Name	Action
No Data		

Add

✕

* Passive Interface

Select



Cancel

OK

6. Configuring the IPv6 Aggregate Route

Choose **One-Device > Gateway > Config > Advanced > Routing > RIPng Settings > Advanced**, click **Add** in **RIPng Aggregate Routing**, and enter the IPv6 address or length. The length of IPv6 address prefix ranges from 0 bit to 128 bits.

RIPng Aggregate Routing ⓘ + Add Delete Selected

☐	Address	Action
No Data		

Add

✕

* IPv6 Aggregate

Routing

Cancel

OK

7. Viewing the Neighbor Information

Choose **One-Device** > **Gateway** > **Config** > **Advanced** > **Routing** > **RIP Settings** > **Neighbor Info**.

The neighbor list displays information about neighbors of the device, including the neighbor address, neighbor protocol version, local address, connected interface, number of received error packets, and number of received error routes.

RIPng Settings	Port Settings	Advanced	Neighbor Info			
Neighbor Address	Neighbor Protocol Version	Local Address	Connected Interface	Rx Error Packets	Rx Error Routes	
No Data						
				Total 0	< 1 >	10/page ▾


4.10.5 OSPFv2

Open Shortest Path First (OSPF) can be applied to large-scale networks. IPv4 uses OSPFv2, and IPv6 uses OSPFv3.

OSPF is a typical link-state routing protocol, which can solve the problems of slow route update, inaccurate measurement, and poor scalability in large networks. It is suitable for networks of various sizes, and even a network with up to thousands of devices.

1. Configuring OSPFv2 Basic Parameters

Choose **One-Device** > **Gateway** > **Config** > **Advanced** > **Routing** > **OSPFV2**, click **Start Setup**, and then configure an instance and an interface respectively.

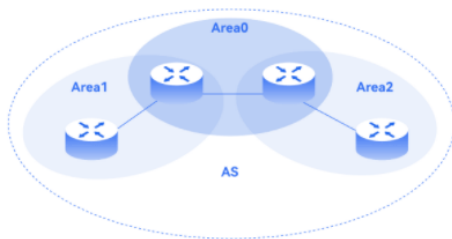

OSPF

OSPF is a typical link-state routing protocol. To satisfy users' increasing requirements for network reliability and heterogeneity on a large network, OSPF solves the problems such as slow convergence, unscientific metric values, and poor scalability.

Highlights

- Achieves fast convergence.
- Minimizes routing overhead.
- Reduces routing update traffic through area partition.
- Applies to various networks with up to thousands of switches.

Start Setup

- Configure an instance
 - (1) Configure basic parameters for an instance.

① **Configure the instance.** ② **Configure the interface.** ③ **Operation succeeded.**

* Instance ID

* Router ID ?

Advertise Default ☐ Route

Import External Route ☐ Static Route Redistribution
☐ Direct Route Redistribution
☐ RIP Redistribution

----- Details -----

Table 4-23 Description of Basic OSPF Instance Configuration Parameters

Parameter	Description
Instance ID	Create an OSPF instance based on the service type. The instance only takes effect locally, and does not affect packet exchange with other devices.

Parameter	Description
Router ID	It identifies a router in an OSPF domain.  Caution Router IDs within the same domain must be unique. The same configuration may cause neighbor discovery failures.
Advertise Default Route	Generate a default route and send it to the neighbor. After this function is enabled, you need to enter the metric and select a type. The default metric is 1. ● Type 1: The metrics displayed on different routers vary. ● Type 2: The metrics displayed on all routers are the same.
Import External Route	Redistribute routes of other protocols to the OSPF domain to interwork with other routing domains. ● If Static Route Redistribution is selected, enter the metric, which is 20 by default. ● If Direct Route Redistribution is selected, enter the metric, which is 20 by default. ● If RIP Redistribution is selected, enter the metric, which is 20 by default.

(2) Click **Details** to display detailed configurations.

Details

Distance

Intra-Area
Default:110

Inter-Area
Default:110

External
Default:110

LSA

Generation Delay
Default:5000ms

Received Delay
Default:1000ms

SPF Calculation

Waiting Interval
Default:0ms

Min Interval
Default:50ms

Max Interval
Default:5000ms

Graceful Restart

Graceful Restart

☒

Helper

LSA Check

☐

*

Max Wait Time

1800

Table 4-24 Description of Detailed OSPF Instance Configuration Parameters

Parameter	Description
Distance	It is used for protocol selection. By default, the intra-area, inter-area, and external distances are all 110 .
LSA	Frequent network changes and route flapping may occupy too much network bandwidth and device resources. The LSA generation and reception delays are specified in OSPF by default. The default value is 1000 ms.

96

Parameter	Description
SPF Calculation	When the link state database (LSDB) changes, OSPF recalculates the shortest path, and sets the interval to prevent frequent network changes from occupying a large number of resources ● Waiting Interval: When the state changes, the timer is triggered. The delay is calculated for the first time after the timer expires. The default value is 0 ms. ● Min Interval: As the number of changes increases, the time of each interval will increase according to the algorithm, and the default value is 50 ms. ● Max Interval: When the calculated interval reaches the maximum interval, the subsequent interval is always equal to the maximum interval. If the time from the last calculation exceeds the maximum interval and the LSDB is not updated, the timer is disabled.
Graceful Restart	Graceful Restart (GR) can avoid route flapping caused by traffic interruption and active/standby board switchover, thus ensuring the stability of key services. ● Graceful Restart Helper: The Graceful Restart Helper function is enabled when this switch is turned on. ● LSA Check: LSA packets outside the domain are checked when this switch is turned on. ● Max Wait Time: Timing starts after the device receives the GR packet from the peer device. If the peer device does not complete GR within Max Wait Time, the device exits the GR Helper mode. The default value is 1800 seconds.

- Configure an interface

(1) Configure basic parameters for an OSPFv2 interface.

① ————— ② ————— ③
 Configure the instance. Configure the interface. Operation succeeded.

* Interface

* Area

Stub Area ☐

----- Details -----

[Add](#)

Table 4-25 Description of Basic OSPFv2 Interface Configuration Parameters

Parameter	Description
Interface	Select the OSPF-enabled L3 interface.
Area	Configure the area ID. Value range: 0-4294967295

Parameter	Description
Stub Area	If Stub Area is enabled, you need to configure the Area Type and Inter-Route Isolation ● Area Type ○ Stub area: Routers at the edge of the area do not advertise routes outside the area, and the routing table in the area is small. ○ Not-So-Stubby Area (NSSA): A few external routes can be imported. ● Inter-Route Isolation After this function is enabled, inter-area routes will not be imported to this area.

(2) Click **Details** to display detailed configurations.

----- [Details](#) -----

Priority	Default:1
Network Type	Broadcast ▾
Hello Packets	Default:10(s)
Dead Interval	Default:40(s)
LSA Transmission Delay	Default:1(s)
LSA Retransmission Interval	Default:5(s)
Interface Auth	No Auth ▾
Ignore MTU Check	☒

Add

Table 4-26 Description of Detailed OSPFv2 Interface Configuration Parameters

Parameter	Description
Priority	A higher priority value indicates a greater chance of being elected as the DR or BDR. The default value is 1.
Network Type	OSPFv2 defines different network types, which affect the establishment of OSPF neighbor relationships, route update, and network convergence. The supported network types include broadcast, unicast, multicast, and non-broadcast multi-access (NBMA).
Hello Packets	Interval for periodic transmission, which is used to discover and maintain OSPF neighbor relationship. The default value is 10 seconds.
Dead Interval	Time after which the neighbor becomes invalid. The default value is 40 seconds.
LSA Transmission Delay	LSA transmission delay of the interface. The default value is 1 second.
LSA Retransmission Interval	Time after which LSA is retransmitted after LSA is lost. The default value is 5 seconds.
Interface Auth	● No Auth: The protocol packets are not authenticated. It is the default value. ● Plain Text: The protocol packets are authenticated, and the authentication key is transmitted with the protocol packets in the form of plain text. ● MD5: The protocol packets are authenticated, and the authentication key is MD5 encrypted and then transmitted with the protocol packets.
Ignore MTU Check	The purpose of ignoring MTU check is to ensure that OSPF-enabled routers can update routing information in time when the network topology changes. This function is enabled by default.

(3) Click **Add** to add an interface to **Interface List**.

Port List

Up to 16 entries can be added.

Interface	Area	Priority	Network Type	Hello Packets	Dead Interval	Interface Auth	LSA Transmission Delay	LSA Retransmission Interval	Action
WAN0	1		Broadcast			No Auth			Delete
Total 1									10/page
Previous Finish									

(4) Click **Finish**.



Operation succeeded.

After you create an instance and an interface, choose **One-Device > Gateway > Advanced > Routing > OSPFV2** to check the current **Instance List**.

Instance List

[+ Add](#)

Instance ID	Router ID	Interface	Area	Advertise Default Route	Import External Route	Action
1	1.1.1.1	WAN0	1(Normal Area)	Disable	Static Route Redistribution : Off Direct Route Redistribution : Off RIP Redistribution : Off	More Neighbor Info Edit Delete

Up to 16 entries can be added.

Total 1 [<](#) **1** [>](#) 10/page [v](#)

2. Adding an OSPFv2 Interface

Choose **One-Device > Gateway > Config > Advanced > Routing > OSPFV2**, select the instance to be configured in **Instance List**, and choose **More > V2 Interface**.

Instance List

[+ Add](#)

Instance ID	Router ID	Interface	Area	Advertise	Import External Route	Action
1	1.1.1.1	WAN0	1(Normal Area)	V2 Interface V2 Instance Route Redistribution V2 Neighbor Management	RIP Redistribution : Off	More Neighbor Info Edit Delete

Up to 16 entries can be added.

Total 1 [<](#) **1** [>](#) 10/page [v](#)

V2 Interface
✕

* Interface Select ▼

* Area

Stub Area ? ☐

[Details](#)

Port List

Add
Reset

Up to 64 entries can be added.

Interface	Area	Priority	Network Type	Hello Packets	Dead Interval	Interface Auth	LSA Transmission Delay	LSA Retransmission Interval	Action
WAN0	1		Broadcast			No Auth			Edit

Total 1
<
1
>
10/page

3. Redistributing OSPFv2 Instance Routes

Choose **One-Device** > **Gateway** > **Config** > **Advanced** > **Routing** > **OSPFV2**, select the instance to be configured in **Instance List**, and choose **More** > **V2 Instance Route Redistribution**.

Caution

The instance ID cannot be selected for route redistribution.

Instance List
+ Add

Instance ID	Router ID	Interface	Area	Advertise	Import External Route	Action
1	1.1.1.1	WAN0	1(Normal Area)			V2 Interface V2 Instance Route Redistribution V2 Neighbor Management More Neighbor Info Edit Delete

RIP Redistribution : Off
<
1
>
10/page

V2 Instance Route Redistribution
×

!

* Instance ID

Select

Metric

Default:20

Route Redistribution List

Add

Reset

Up to 63 entries can be added.

Instance ID	Metric	Action
No Data		

Total 0

<

1

>

10/page

4. Managing OSPFv2 Neighbors

Choose **One-Device > Gateway > Config > Advanced > Routing > OSPFV2**, select the instance to be configured in **Instance List**, and choose **More > V2 Neighbor Management**.

Instance List

+ Add

Instance ID	Router ID	Interface	Area	Advertise	Import External Route	Action
1	1.1.1.1	WAN0	1(Normal Area)	V2 Interface V2 Instance Route Redistribution V2 Neighbor Management		More Neighbor Info Edit Delete

Up to 16 entries can be added.

Total 1

<

1

>

10/page

V2 Neighbor Management
×

* Neighbor IP

Neighbor List

Add

Reset

Up to 64 entries can be added.

Neighbor IP	Action
No Data	

Total 0

<

1

>

10/page

5. Viewing OSPFv2 Neighbor Information

Choose **One-Device** > **Gateway** > **Config** > **Advanced** > **Routing** > **OSPFV2**, select the instance to be configured in **Instance List**, and click **Neighbor Info**.

Instance List

[+ Add](#)

Instance ID	Router ID	Interface	Area	Advertise Default Route	Import External Route	Action
1	1.1.1.1	WAN0	1(Normal Area)	Disable	Static Route Redistribution : Off Direct Route Redistribution : Off RIP Redistribution : Off	More Neighbor Info Edit Delete

Up to 16 entries can be added.

Total 1 [<](#) [1](#) [>](#) 10/page [v](#)

Neighbor Info

Instance ID	Router ID	Status	Neighbor IP	Interface
No Data				


Total 0 [<](#) [1](#) [>](#) 10/page [v](#)

4.10.6 OSPFv3

Open Shortest Path First (OSPF) can be applied to large-scale networks. IPv4 uses OSPFv2, and IPv6 uses OSPFv3.

1. Configuring OSPFv3 Basic Parameters

Choose **One-Device** > **Gateway** > **Config** > **Advanced** > **Routing** > **OSPFV3**, click **Start Setup**, and then configure an instance and an interface respectively.

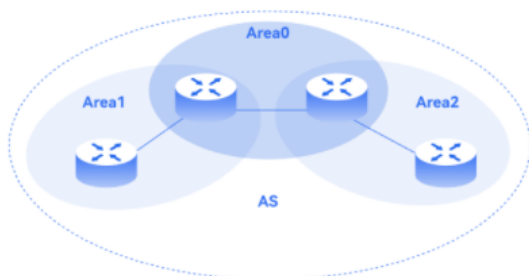

OSPF

OSPF is a typical link-state routing protocol. To satisfy users' increasing requirements for network reliability and heterogeneity on a large network, OSPF solves the problems such as slow convergence, unscientific metric values, and poor scalability.

Highlights

- Achieves fast convergence.
- Minimizes routing overhead.
- Reduces routing update traffic through area partition.
- Applies to various networks with up to thousands of switches.

Start Setup

- Configure an instance

(1) Configure basic parameters for an instance.

① **Configure the instance.** ② **Configure the interface.** ③ **Operation succeeded.**

* Router ID ?

Advertise Default ☐

Route

- Import External Route ☐ Static Route Redistribution
- ☐ Direct Route Redistribution
- ☐ RIP Redistribution

----- Details -----

Table 4-27 Description of Basic OSPF Instance Configuration Parameters

Parameter	Description
Router ID	It identifies a router in an OSPF domain.  Caution Router IDs within the same domain must be unique. The same configuration may cause neighbor discovery failures.
Advertise Default Route	Generate a default route and send it to the neighbor. After this function is enabled, you need to enter the metric and select a type. The default metric is 1. ● Type 1: The metrics displayed on different routers vary. ● Type 2: The metrics displayed on all routers are the same.
Import External Route	Redistribute routes of other protocols to the OSPF domain to interwork with other routing domains. ● If Static Route Redistribution is selected, enter the metric, which is 20 by default. ● If Direct Route Redistribution is selected, enter the metric, which is 20 by default. ● If RIP Redistribution is selected, enter the metric, which is 20 by default.

(2) Click **Details** to display detailed configurations.

 Details

Distance

Intra-Area

Default:110

Inter-Area

Default:110

External

Default:110

LSA

Received Delay

Default:1000ms

SPF Calculation

Waiting Interval

Default:0ms

Min Interval

Default:50ms

Max Interval

Default:5000ms

Graceful Restart

Graceful Restart

☒

Helper

LSA Check

☐

* Max Wait Time

1800

[< Previous](#)
[Next >](#)
Table 4-28 Description of Detailed OSPF Instance Configuration Parameters

Parameter	Description
Distance	It is used for protocol selection. By default, the intra-area, inter-area, and external distances are all 110 .
LSA	Frequent network changes and route flapping may occupy too much network bandwidth and device resources. The LSA generation and reception delays are specified in OSPF by default. The default value is 1000 ms.

Parameter	Description
SPF Calculation	When the link state database (LSDB) changes, OSPF recalculates the shortest path, and sets the interval to prevent frequent network changes from occupying a large number of resources ● Waiting Interval: When the state changes, the timer is triggered. The delay is calculated for the first time after the timer expires. The default value is 0 ms. ● Min Interval: As the number of changes increases, the time of each interval will increase according to the algorithm, and the default value is 50 ms. ● Max Interval: When the calculated interval reaches the maximum interval, the subsequent interval is always equal to the maximum interval. If the time from the last calculation exceeds the maximum interval and the LSDB is not updated, the timer is disabled.
Graceful Restart	Graceful Restart (GR) can avoid route flapping caused by traffic interruption and active/standby board switchover, thus ensuring the stability of key services. ● Graceful Restart Helper: The Graceful Restart Helper function is enabled when this switch is turned on. ● LSA Check: LSA packets outside the domain are checked when this switch is turned on. ● Max Wait Time: Timing starts after the device receives the GR packet from the peer device. If the peer device does not complete GR within Max Wait Time, the device exits the GR Helper mode. The default value is 1800 seconds.

- Configure an interface

(1) Configure basic parameters for an interface.

1 ————— 2 ————— 3

Configure the instance. Configure the interface. **Operation succeeded.**

* Interface

WAN0

▼

* Area

1

Stub Area

Details

Add

Table 4-29 Description of Basic OSPF Interface Configuration Parameters

Parameter	Description
Interface	Select the OSPF-enabled L3 interface.
Area	Configure the area ID. Value range: 0-4294967295

Parameter	Description
Stub Area	If Stub Area is enabled, you need to configure the Area Type and Inter-Route Isolation ● Area Type ○ Stub area: Routers at the edge of the area do not advertise routes outside the area, and the routing table in the area is small. ○ Not-So-Stubby Area (NSSA): A few external routes can be imported. ● Inter-Route Isolation After this function is enabled, inter-area routes will not be imported to this area.

(2) Click **Details** to display detailed configurations.

----- Details -----

Priority

Network Type

Hello Packets

Dead Interval

LSA Transmission Delay

LSA Retransmission Interval

Header Certification

Tail Certification

Ignore MTU Check ☒

Table 4-30 Description of Detailed OSPF Interface Configuration Parameters

Parameter	Description
Priority	A higher priority value indicates a greater chance of being elected as the DR or BDR. The default value is 1.

Parameter	Description
Network Type	OSPFv3 defines different network types, which affect the establishment of OSPF neighbor relationships, route update, and network convergence. The supported network types are broadcast and unicast.
Hello Packets	Interval for periodic transmission, which is used to discover and maintain OSPF neighbor relationship. The default value is 10 seconds.
Dead Interval	Time after which the neighbor becomes invalid. The default value is 40 seconds.
LSA Transmission Delay	LSA transmission delay of the interface. The default value is 1 second.
LSA Retransmission Interval	Time after which LSA is retransmitted after LSA is lost. The default value is 5 seconds.
Header Certification	The authentication field in the header of an OSPFv3 packet for verifying the integrity of the packet, including the header and payload. The supported authentication modes are as follows: ● No Auth: No authentication is performed by default. ● MD5 Auth: MD5 HMAC ● SHA1 Auth: SHA-1 HMAC ● SHA256 Auth: SHA-256 HMAC
Tail Certification	The authentication field added to the trailer of an OSPFv3 packet for verifying the authenticity of the packet and ensure that the packet is sent by an authorized sender and is not tampered with during transmission. The supported authentication modes are as follows: ● No Auth: No authentication is performed by default. ● MD5 Auth: MD5 HMAC ● SHA256 Auth: SHA-256 HMAC
Ignore MTU Check	The purpose of ignoring MTU check is to ensure that OSPF-enabled routers can update routing information in time when the network topology changes. This function is enabled by default.

(3) Click **Add** to add an interface to **Interface List**.

Port List

Up to 16 entries can be added.

Interface	Area	Priority	Network Type	Hello Packets	Dead Interval	LSA Transmission Delay	LSA Retransmission Interval	Action
WAN0	1		Broadcast					Delete

Total 1

Previous Finish

(4) Click **Finish**.

After you complete configuration, choose **One-Device > Gateway > Config > Advanced > Routing > OSPFV3** to check **Instance List**.

OSPFv3

Up to 1 entries can be added.

Router ID	Interface	Area	Advertise Default Route	Import External Route	Distance	SPF Calculation	Graceful Restart Helper	Action
1.1.1.1	WAN0	1(stub)	Disable	Static Route Redistribution : Off Direct Route Redistribution : Off RIP Redistribution : Off			Enable	More Neighbor Info Edit Delete

Total 1 < 1 > 10/page

2. Adding an OSPFv3 Interface

Choose **One-Device** > **Gateway** > **Config** > **Advanced** > **Routing** > **OSPFV3**, select the instance to be configured in **Instance List**, and choose **More** > **V3 Interface**.

OSPFv3

Up to 1 entries can be added.

Router ID	Interface	Area	Advertise Default Route	Import External Route	Distance	SPF Calculation	Graceful Restart Helper	Action
1.1.1.1	WAN0	1(stub)	Disable	Static Redistribu Direct Route Redistribution : Off RIP Redistribution : Off			Enable	More Neighbor Info Edit Delete

Total 1 < 1 > 10/page

V3 Interface
✕

* Interface Select ▼

* Area

Stub Area ?

[Details](#)

Port List

Add
Reset

Up to 64 entries can be added.

Interface	Area	Priority	Network Type	Hello Packets	Dead Interval	LSA Transmission Delay	LSA Retransmission Interval	Action
WAN0	1		Broadcast					Edit Delete

Total 1 1 < > 10/page

3. Viewing OSPFv3 Neighbor Information

Choose **One-Device** > **Gateway** > **Config** > **Advanced** > **Routing** > **OSPFV3**, select the instance to be configured in **Instance List**, and click **Neighbor Info**.

Router ID	Interface	Area	Advertise Default Route	Import External Route	Distance	SPF Calculation	Graceful Restart Helper	Action
1.1.1.1	WAN0	1(stub)	Disable	Static Route Redistribution : Off Direct Route Redistribution : Off RIP Redistribution : Off			Enable	More Neighbor Info Edit Delete

Total 1 1 < > 10/page

Neighbor Info

Router ID	Status	Interface
No Data		

Total 0 1 < > 10/page

4.10.7 Viewing Routing Tables

Choose **One-Device > Gateway > Config > Advanced > Routing > Routing Table Info** to view IPv4 and IPv6 routing table details.

[IPv4](#)
[IPv6](#)

Route Info
Entry Type: Global Data
[Re-fetch](#)

Dest IP Address	Route Type	Distance/Metric	Interface	Next Hop
0.0.0.0/0	System routing	[0/0]	WAN0	10.52.48.1
4.4.4.0/24	Direct Routing	[0/0]	VLAN 555	*
5.5.5.0/24	Direct Routing	[0/0]	VLAN 55	*
10.52.48.0/21	Direct Routing	[0/0]	WAN0	*
10.80.12.0/24	Direct Routing	[0/0]	--	*
192.168.2.0/24	Direct Routing	[0/0]	Default VLAN	*
10.52.48.0/24	Static Routing	[1/20]	WAN0	10.52.48.43

Total 7
1
10/page

[IPv4](#)
[IPv6](#)

Route Info
Entry Type: Global Data
[Re-fetch](#)

Dest IP Address	Route Type	Distance/Metric	Interface	Next Hop
No Data				

Total 0
1
10/page

4.10.8 Setting URL Routes

Choose **One-Device > Gateway > Config > Advanced > Routing Settings > URL Routing**.

Configure the outbound interface for accessing a website URL. When a data packet matches the URL route, the data packet is forwarded in the specified mode.

URL Routing When a packet successfully matches a URL route, the packet is forwarded based on the defined routing rules.

URL Routing Table
[+ Add](#)
[Delete Selected](#)

☐	User Group	Website Group	Time	Outbound Interface	Traffic Assurance	Effective State	Remarks	Action
No Data								

Up to 30 entries can be added.
Total 0
1
10/page

Click **Add**. In the dialog box that appears, set the type, website group, outbound interface, and managed time range, and then click Add to create a URL route.

Add

✕

Type ☒ User Group ☐ Custom* User Group (?) * Website Group Time Outbound Interface Remarks Traffic Assurance ☒Effective State ☒

Cancel

OK

Table 4-31 URL Routing Configuration Parameters

Parameter	Description
Type	URL route type, which can be: ● User group: select the user group to which the route-policy applies. ● Custom: apply the route to users with IP addresses in the specified IP address range. You need to manually enter the IP address range.
User group	This parameter is required when type is set to user group. Select users to which the URL route applies from the user group list. The user group list is available in 9.2 User Management. If all members in a user group are selected, the configuration takes effect on the entire user group (including members added to the user group later).
IP Address Group	Configure this information when type is set to custom. Enter the IP address range managed by URL routing.
Website group	Set the website type for which URL routes need to be configured. Select a website group from the created website groups. For details on how to create or modify a website group, see Section 9.5 Website Management.
Managed time period	During the controlled period, when the managed client accesses the application in the website group, the packets are forwarded through the outbound interface. Select

Parameter	Description
	from the drop-down list. Time range defined in 9.3 Time Management , or select custom and manually configure a time range.
Outgoing interface	Specify the interface that forwards the data packet based on the hit PBR rule.
Remarks	Configuring the description of a URL route
Network disconnection protection	After this function is enabled, if the outbound interface is unreachable, traffic is automatically switched to another reachable outbound interface.
Effective status	Turn on status to specify whether to enable the PBR rule. If status is turned off, this rule does not take effect.

4.10.9 Configuring BGP Routes

The Internet consists of many autonomous systems (ASs) globally. Each AS may be an Internet service provider (ISP) network, large enterprise network, or education network. Border Gateway Protocol (BGP) is the core routing protocol on the Internet and is used to exchange routing information between ASs. For example, an ISP needs to connect to multiple other ISPs to allow its users to access network resources worldwide. Based on the path vector protocol, BGP enables ASs to select the optimal data transmission path, ensuring network connectivity and performance optimization.

Choose **One-Device > Gateway > Config > Advanced > Routing Settings > BGP**.

1. Configuring BGP Basic Parameters

(1) Click **Start Setup**.



BGP

Border Gateway Protocol (BGP) is a standardized exterior gateway protocol that automatically exchange loop-free routing information between separate autonomous systems (ASs).

Highlights

- Focus on controlling route propagation.
- Applicable to networks with a large number of routes.
- Uses the TCP protocol to ensure transmission reliability.
- Only advertises the best path to their neighbors.

Start Setup

(2) Set parameters in **Basic Configuration** and click **Next**.

① Basic Configuration
② Peer Configuration
③ Operation succeeded.

* AS Number

* Router ID

Import Routes

☐ Direct route
☐ Static route
☐ RIP

Import Routes v6

☐ Direct route v6
☐ Static route v6
☐ RIPNG
☐ OSPFv3

Previous
Next


Table 4-32 BGP Basic Configuration Parameters

Parameter	Description
AS Number	AS numbers are used to distinguish different ASs and are the basis of BGP communication. A device supports 4-byte AS numbers by default. Numbers from 1 to 4199999999 are public AS numbers, and numbers from 4200000000 to 4294967294 are private AS numbers. Private AS numbers are used to classify ASs in an AS confederation.
Router ID	The router ID uniquely identifies a BGP device.
Import Routes	Import IPv4 routes into a BGP routing table. Select the types of routes to be imported and set the metric. The metric is a numerical value used in BGP path selection to measure the cost of reaching a destination. A smaller metric value indicates a better path. The default value is 20.
Import Routes v6	Import IPv6 routes into a BGP routing table. Select the types of routes to be imported and set the metric. The metric is a numerical value used in BGP path selection to measure the cost of reaching a destination. A smaller metric value indicates a better path. The default value is 20.

2. Configuring BGP Peers

- Configure an IPv4 peer.

- (1) Click the **IPv4** tab and click **Add**.

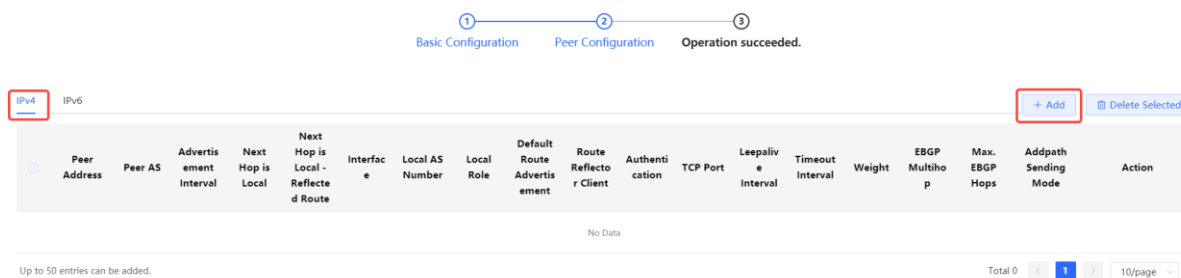

- (2) Configure parameters related to the IPv4 peer. For details about the parameters, see [Table 4-33 BGP Peer Configuration Parameters](#).

Add
×

* Peer Address

Peer AS

AS Number

* AS Number

Interface

AUTO

----- Advanced Settings -----

Cancel

OK


- (3) Click **Advanced Settings** and configure advanced parameters. For details about the parameters, see [Table 4-33 BGP Peer Configuration Parameters](#).

Local AS Number	Optional
Local Role	None
Default Route Advertisement	☐
AFI	☒ IPv4 ☐ IPv6
Route Reflector Client	☐
Authentication	☐
TCP Port	179
* Advertisement Interval	0 s
Next Hop is Local	☒
Next Hop is Local - Reflected Route	☒
Leepalive Interval ?	Optional s
Timeout Interval ?	Optional s
Weight	0
EBGP Multihop	☐
* Max. EBGP Hops	1
Addpath Sending Mode	Not send

(4) Click **Finish**.

- Configure an IPv6 peer.

(1) Click the **IPv6** tab and click **Add**.

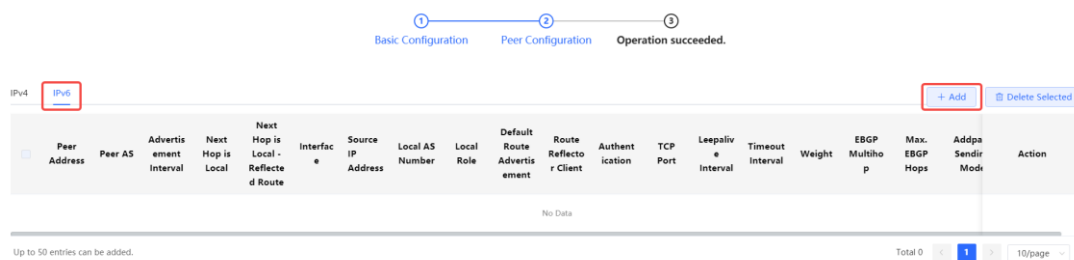

- (2) Configure parameters related to the IPv6 peer. For details about the parameters, see [Table 4-33 BGP Peer Configuration Parameters](#).

Add
×

* Peer Address

Peer AS

* AS Number

Interface

Source IP Address ?

----- Advanced Settings -----

Cancel

OK

- (3) Click **Advanced Settings** and configure advanced parameters. For details about the parameters, see [Table 4-33 BGP Peer Configuration Parameters](#).

----- Advanced Settings -----

Local AS Number

Local Role

Default Route ☐

Advertisement

AFI ☐ IPv4 ☒ IPv6

Route Reflector Client ☐

Authentication ☐

TCP Port

* Advertisement

Interval

Next Hop is Local ☒

Next Hop is Local - ☒

Reflected Route

Leepalive Interval (?)

Timeout Interval (?)

Weight

EBGP Multihop ☐

* Max. EBGP Hops

Addpath Sending

Mode

(4) Click **Finish**.

Table 4-33 BGP Peer Configuration Parameters

Parameter	Description
Peer Address	Specify the IP address of a BGP peer router. The IP address is used to establish a TCP connection.
Peer AS	Specify the AS number of a BGP peer. The number is used to determine the AS to which a peer belongs. - External AS Peer: When the peer AS is different from the local AS, select this option to establish a direct connection. - Internal AS Peer: When the peer AS is the same as the local AS, select this option to establish a direct connection. - AS Number: When establishing a peer relationship with another network, enter the AS number of the other network.

Parameter	Description
AS Number	This parameter needs to be configured when Peer AS is set to AS Number . The parameter is used to determine the AS to which the peer belongs.
Interface	Specify the local network interface for communicating with a BGP peer. The parameter is set to AUTO by default, that is, the system automatically selects an interface. Note that in the multi-WAN interface scenario, IP addresses of different WAN interfaces may be on the same network segment. As a result, you need to specify the interface.
Source IP Address	A device may learn multiple IPv6 addresses on the same interface. In this case, you can specify a source address to establish a BGP connection.  Note This parameter can be set only when IPv6 peers are configured.
Local AS Number	When establishing a BGP connection with a peer, you can configure a local AS number, which can replace the global AS number. After the configuration is complete, the local device can be replaced smoothly without modifying the configuration of the peer device.
Local Role	You can configure the BGP local role to determine whether to advertise and learn routes when the local device connects to a peer device. The configuration is valid only in EBGP sessions. ● None: If no role is specified, the device can learn routes from all other roles. ● Customer: The local AS is a customer of the remote AS, and Remote AS Role is set to Provider. ● Peer: The local AS and remote AS establish a peer relationship, and Remote AS Role is set to Peer. ● Provider: The local AS is a provider of the remote AS, and Remote AS Role is set to Customer. ● Rs-Client: The local AS is a client of the route server, and Remote AS Role is set to Route Server. ● Rs-Server: The local AS is a route server, and Remote AS Role is set to Rs-Client.
Default Route Advertisement	Whether to advertise default routes to neighbors.
AFI	AFI specifies an address family, such as IPv4 or IPv6, to be processed in a BGP session.

Parameter	Description
Route Reflector Client	Whether to specify a neighbor as the client of a route reflector (RR). The RR advertises routes learned from IBGP peers to other specific IBGP peers. As shown in the figure, configure R2 and R3 as RR clients on R1 to implement the route reflection function. Note that this function can reflect only the routes of IBGP neighbors.
Authentication	Specify the BGP session authentication. If you toggle on this parameter, you need to set Auth Password. Authentication ☒ * Auth Password
TCP Port	Specify the TCP server port number of a BGP peer. The port number of the local server is fixed to 179.
Advertisement Interval	For learned routes, you can configure a route advertisement delay. Routes learned by default are advertised immediately.
Next Hop is Local	After this parameter is toggled on, the next hop address of an advertised route is that of the local device.
Next Hop is Local - Reflected Route	After this parameter is toggled on, the next hop address of an advertised reflected route is that of the local device.
Keepalive Interval	Specify the interval at which BGP keepalive messages are sent, which is used to maintain the BGP session. (The global configuration prevails by default.)
Timeout Interval	Specify the BGP session timeout time. If no keepalive message is received within this period, the session is considered to be disconnected. (The global configuration prevails by default.)

Parameter	Description
Weight	Configure the weight of routes learned from a neighbor. A greater weight indicates a higher priority.
EBGP Multihop	After this parameter is toggled on, the multiple-hop communication between EBGP peers is allowed.
Max. EBGP Hops	Configure the maximum number of hops that an EBGP route can pass through.
Addpath Sending Mode	This feature allows the use of add-path to advertise paths to neighbors. The parameter can be set to the following options. ● Not send: Indicate the default value. ● Send all paths: Send all paths to neighbors. ● Only send the best path: Send the optimal path to neighbors. ● Send the best path of each neighbor: Send the optimal paths of neighbors to other neighbors.

3. Configuring Route Aggregation

Choose **One-Device > Gateway > Config > Advanced > Routing Settings > BGP > Route Aggregation**.

(1) Click the **IPv4** or **IPv6** tab to aggregate IPv4 or IPv6 routes, respectively. Then click **Add**.

(2) Configure the parameters.

Table 4-34 BGP Route Aggregation Parameters

Parameter	Description
Summary Subnets	Specify the subnets to be summarized. In the BGP route summarization configuration, you need to aggregate a series of IP addresses with the same prefix into a larger network segment and advertise the network segment to other BGP peers. For example, if subnets 10.1.1.0/24 and 10.1.2.0/24 exist, you can set Summary Subnets to 10.1.0.0/16 to represent the subnets.  Caution The mask length cannot be set to 0 or 32 for IPv4 route summarization, or to 0 or 128 for IPv6 route summarization. If no post-summarization route network segment exists on the local device, a static black hole route of the network segment will be generated on the local device.
Route Type	Specify the route types, including All types , EGP types , IGP types , and Import Route Types .
Only advertise summary routes	Whether to advertise only aggregated routes. After this parameter is toggled on, a BGP router advertises only aggregated routes to peers, but not specific subnet routes.


(3) Click **OK**.

4. Configuring Route Advertisement


Choose **One-Device > Gateway > Config > Advanced > Routing Settings > BGP > Route Advertisement**.

You can directly advertise a subnet route to the peer. Note that if the network segment does not exist on the local device, you need to toggle off **Route Advertisement Detection** in **Advanced**.

(1) Click the **IPv4** or **IPv6** tab to advertise IPv4 or IPv6 routes, respectively. Then click **Add**.

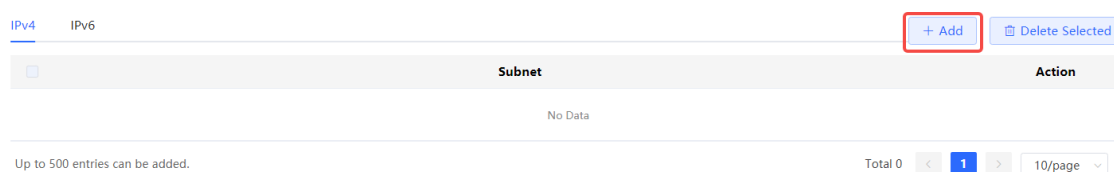

(2) Enter the subnet address and click **OK**.

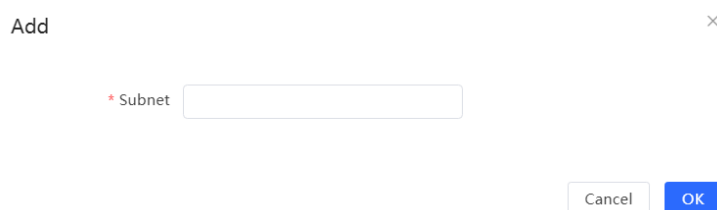

5. Configuring the Advanced Functions

Choose **One-Device > Gateway > Config > Advanced > Routing Settings > BGP > Advanced**.

(1) Configure the parameters.

Route Reflector Cluster ID	Use the Default Routing ID
AS Alliance Number	
AS Alliance Member List ?	+ Add
	To be Added
Route Advertisement	☐
Detection	
EBGP Policy Import Detection	☐
MED Attribute Comparison	☐
Compare AS Alliance Path	☐
Length	
Ignore AS-Path Length	☐
Support ECMP routes Under	☐
Different AS Paths	
Compare Router ID	☐
Graceful Restart	☒
Reserved	☒
Routing	
Table	
* Graceful	120
Restart	s
Timer	
* Leepalive Interval	60
	s
* Timeout Interval	180
	s
Save	

Table 4-35 BGP Advanced Parameters

Parameter	Description
Route Reflector Cluster ID	Configure the RR ID, which is used to identify a cluster in RR scenarios. In BGP, an RR allows indirectly connected BGP peers to exchange routing information. The router ID is used as the RR ID by default.
AS Alliance Number	Specify the number of an AS confederation to which ASs belong to. In a confederation, a large AS is divided into multiple smaller ASs to simplify route management.
AS Alliance Member List	Specify the numbers of all member ASs in an AS confederation. This helps define which ASs are part of the confederation and considers AS paths inside a confederation during route calculation. Click Add to add members to the AS confederation.
Route Advertisement Detection	Whether to advertise routes. If the parameter is toggled on, the device will detect whether the route exists, and advertise it only if it exists.
EBGP Policy Import Detection	Specify the External BGP (EBGP) policy import detection, which is used to apply a specific policy before EBGP routes are imported to the local routing table. Toggling on this parameter affects the establishment of EBGP peer relationships and route learning.
MED Attribute Comparison	MED is a BGP path attribute that influences path selection and helps distribute traffic more evenly.
Compare AS Alliance Path Length	Whether to compare the path length of an AS confederation in BGP path selection. This helps in choosing between paths within and outside a confederation.
Ignore AS-Path Length	Whether to configure BGP to ignore the AS path length during path selection. This can be used to ignore path preference based on AS hop count, and may be applied in specific routing policies.
Support ECMP routes Under Different AS Paths	Equal-cost multi-path routing (ECMP) can be used across different AS paths. This allows routers to balance traffic among multiple paths.
Compare Router ID	Whether to enable BGP to compare router IDs during path selection. When ECMP exists, the path with a larger router ID is preferred.

Parameter	Description
Graceful Restart	After this parameter is toggled on, nonstop routing and no impact on traffic forwarding can be ensured after BGP restarts due to an unexpected shutdown. In addition, the device can function as a GR helper to help neighbors restart gracefully. After this parameter is toggled on, configure the following parameters: - Reserved Routing Table: After this parameter is toggled on, routing flapping does not occur on a neighbor when the connection with the neighbor is reestablished during BGP restart in case of an unexpected BGP shutdown. - Graceful Restart Timer: Timer for assisting the neighbor restart as a GR helper. After the renegotiation process times out, the originally learned routes will be deleted.
Leepalive Interval	Specify the interval at which BGP keepalive messages are sent, which is used to maintain the BGP session.
Timeout Interval	Specify the BGP session timeout time. If no keepalive message is received within this period, the session is considered to be disconnected.

(2) Click **Save**.

4.11 Configuring ARP Binding and ARP Guard

4.11.1 Overview

The device learns the IP address and MAC address of the network devices connected to its interfaces and generates the corresponding ARP entries. You can enable ARP guard and configure IP-MAC binding to restrict Internet access of LAN hosts and improve network security.

4.11.2 Configuring ARP Binding

Choose **One-Device > Gateway > Config > Security > ARP List**.

Before you enable ARP guard, you must configure the binding between IP addresses and MAC addresses in either of the following ways:

- (1) Select a dynamic ARP entry in the ARP list and click **Bind**. You can select multiple entries to be bound at one time and click **Bind Selected** to bind them.

ARP List

Search by IP Address/MAC Addr

[+ Add](#) [Bind Selected](#) [Delete Selected](#)

☒	No.	Device Name	MAC Address	IP Address	Type	Action
☒	1	Click to edit	ec...8	10.52.48.1	Dynamic	Bind
☒	2	Click to edit	cC...5	10.52.49.26	Dynamic	Bind
☐	3	Click to edit	0...79	10.52.48.53	Dynamic	Bind
☐	4	Click to edit	00...3c	10.52.48.110	Dynamic	Bind
☐	5	Click to edit	00...36	10.52.50.239	Dynamic	Bind

- (2) Click **Add**, enter the device name, IP address and MAC address to be bound, and click **OK**. The input box can display existing address mappings in the ARP list. You can click a mapping to automatically enter the address mapping.

×

Add

Device Name ?

* IP Address

* MAC Address

Cancel
OK

To remove the binding between a static IP address and a MAC address, click **Delete** in the **Action** column.

ARP List ↻

Search by IP Address/MAC Addr

+ Add

Bind Selected

Delete Selected

No.	Device Name	MAC Address	IP Address	Type	Action
☒	1 Click to edit	e-...	10.52.48.1	Dynamic	Bind
☒	2 Click to edit	c-...-...-5	10.52.49.26	Dynamic	Bind
☐	3 Click to edit	0C-...-79	10.52.48.53	Dynamic	Bind
☐	4 Click to edit	0C-...-3c	10.52.48.110	Dynamic	Bind

4.11.3 Configuring ARP Guard

After ARP guard is enabled, only LAN hosts with IP-MAC binding can access the external network. For details on how to configure ARP binding, see Section [4.11.2 Configuring ARP Binding](#).

- (1) Choose **One-Device > Gateway > Config > Security > ARP List**.
- (2) Turn on **Enable** in the **ARP Guard** section to enable ARP guard.

ARP Guard

Enable ? ON Only the devices configured with IP-MAC binding are allowed to access the Internet.

Interface ☒ Select All

☒ Default VLAN ☒ VLAN 55 ☒ VLAN 555

Keep Config

- (3) Set the range for the function to take effect.

If you select **Select All**, the ARP guard function will take effect on all clients on the LAN. If you select a specified port, the ARP guard function will take effect only on clients connected to the port.

4.12 Configuring MAC Address Filtering

4.12.1 Overview

You can enable MAC address filtering and configure an **Allowlist** or **Blocklist** to effectively control Internet access from LAN hosts.

- **Allowlist**: Allow only hosts whose MAC addresses are in the filter rule list to access the Internet.
- **Blocklist**: Deny hosts whose MAC addresses are in the filter rule list from accessing the Internet.

4.12.2 Configuration Steps

Choose **One-Device > Gateway > Config > Security > MAC Filtering**.

- (1) In the Filtering Rule List pane, click **Add**. In the dialog box that appears, enter the MAC address and remarks. The input box can display existing address mappings in the ARP list. You can click a mapping to automatically enter the MAC address. Click **OK**. A filter rule is created.

Filtering Rule List

☐	Device Name	MAC Address	Action
No Data			

Up to 512 entries can be added.

Total 0 < 1 > 10/page

Add

×

Device Name ?

Optional


* MAC Address

Enter or select a MAC address.

Cancel

OK

- (2) Turn on **MAC Filtering**, set **Filtering Type**, and click **Save**.

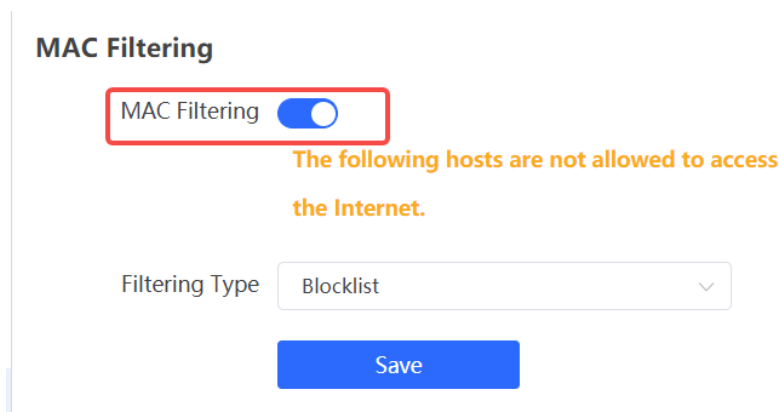

The image shows a configuration interface for MAC Filtering. At the top, the title 'MAC Filtering' is displayed. Below it, there is a toggle switch labeled 'MAC Filtering' which is currently turned on (blue). This toggle is enclosed in a red rectangular box. To the right of the toggle, a message in orange text states: 'The following hosts are not allowed to access the Internet.' Below this message, there is a dropdown menu labeled 'Filtering Type' with 'Blocklist' selected. At the bottom of the form is a blue 'Save' button.

4.13 Port Mapping

4.13.1 Overview

1. Port Mapping

The port mapping function can establish a mapping relationship between the IP address and port number of a WAN interface and the IP address and port number of a server in the LAN, so that all access traffic to a service port of the WAN interface will be redirected to the corresponding port of the specified LAN server. This function enables external users to actively access the service host in the LAN through the IP address and port number of the specified WAN interface.

Application scenario: Port mapping enables users to access the cameras or computers in their home network when they are in the enterprise or on a business trip.

2. NAT-DMZ

When an incoming data packet does not hit any port mapping entry, the packet is redirected to the LAN server according to the Demilitarized Zone (DMZ) rule. All data packets actively sent from the Internet to the device are forwarded to the designated DMZ host, thus realizing LAN server access of external network users. DMZ not only realizes the external network access service, but also ensures the security of other hosts in the LAN.

Application scenario: Configure port mapping or DMZ when an external network user wants to access the LAN server, for example, access a server deployed in the home network when the user is in the enterprise or on a business trip.

4.13.2 Getting Started

- Confirm the intranet IP address of the mapping device on the LAN and the port number used by the service.
- Confirm that the mapped service can be normally used on the LAN.

4.13.3 Configuration Steps

Choose **One-Device > Gateway > Config > Advanced > Port Mapping > Port Mapping**.

Click **Add**. In the dialog box that appears, enter the rule name, service type, protocol type, external port/range, internal server IP address, and internal port/range. You can create a maximum of 50 port mapping rules.

Port Mapping List

+ Add

Delete Selected

☐	Name ?	Protocol ?	External IP Address ?	External Port ?	Internal IP Address ?	Internal Port ?	Action

No Data

Up to 512 entries can be added.

Total 0 < 1 > 10/page

Add

✕

* Name ?

Preferred Server

HTTPS



Protocol ?

TCP



External IP Address ?

☒ Outbound Interface☐ Enter or select an IP address.

All WAN Ports



* External Port/Range ?

Example: X or X-X (Range: 1-65535)

* Internal IP Address ?

Example: 1.1.1.1

* Internal Port/Range ?

443

Cancel

OK

Table 4-36 Port mapping configuration

Parameter	Description
Name	Enter the description of the port mapping rule, which is used to identify the rule.
Preferred Server	Select the type of service to be mapped, such as HTTP or FTP. The internal port number commonly used by the service is automatically entered. If you are not sure about the service type, select Custom .
Protocol	Select the transmission layer protocol type used by the service, such as TCP or UDP . The value ALL indicates that the rule applies to both protocols. The value must comply with the client configuration of the service.

Parameter	Description
External IP Address	Specify the host address used for accessing the external network. You can set it to the following: ● Outbound Interface: You can select All WAN Ports or specify a WAN interface. ● Enter or select an IP address: Select or enter the IP address of a WAN interface.
External Port/Range	Specify the port number used for Internet access. You need to confirm the port number in the client software, such as the camera monitoring software. You can enter a port number or a port range, such as 1050-1060. If you enter a port range, the value of Internal Port/Range must also be a port range.
Internal IP Address	Specify the IP address of the internal server to be mapped to the WAN interface, that is, the IP address of the LAN device that provides Internet access, such as the IP address of the network camera.
Internal Port/Range	Specify the service port number of the internal server to be mapped to the WAN interface, that is, the port number of the application that provides Internet access, such as port 8080 of the Web service. You can enter a port number or a port range, such as 1050-1060. If you enter a port range, the number of ports must be the same as that specified in External Port/Range .

4.13.4 Verification and Test

Check whether the external network device can access services on the destination host using the external IP address and external port number.

4.13.5 Solution to Test Failure

- (1) Modify the value of **External Port/Range** and use the new external port number to perform the test again. The possible cause is that the port is blocked by the firewall.
- (2) Enable the remote access permission on the server. The possible cause is that remote access is displayed on the server, resulting in normal internal access but abnormal access across network segments.
- (3) Configure DMZ rules. For details, see Section [4.13.6 Configuration Steps \(DMZ\)](#). The possible cause is that the specified ports are incorrect or incomplete.

4.13.6 Configuration Steps (DMZ)

Choose **One-Device > Gateway > Config > Advanced > Port Mapping > NAT-DMZ**.

Click **Add**. Enter the rule name and internal server IP address, select the interface to which the rule applies, specify the rule status, and click **OK**. You can configure only one DMZ rule for an outbound interface.

 You can view NAT-DMZ settings and edit or delete the rule.

NAT-DMZ Rule List

[+ Add](#)
[Delete Selected](#)

☐	Name 	Outbound Interface 	Dest IP Address 	Status 	Action
No Data					

There are 2 outbound interfaces. Up to 2 rules can be added.

Add Rule



* Name

* Dest IP Address

Example: 1.1.1.1

Outbound Interface

WAN0

Status

☒

Cancel

OK

Table 4-37 DMZ rule configuration

Parameter	Description
Name	Enter the description of the mapping rule, which is identify the DMZ rule.
Dest IP Address	Specify the IP address of the DMZ host to which packets are redirected, that is, the IP address of the internal server that can be accessed from the Internet.
Outbound Interface	Specify the WAN interface in the DMZ rule. You can configure only one rule for a WAN interface.
Status	Specify whether the rule is effective. The rule is effective after you turn on Status .

4.14 UPnP

4.14.1 Overview

After the Universal Plug and Play (UPnP) function is enabled, the device can change the port used by the Internet access service according to the client request, implementing NAT. When a client on the Internet wants to access the internal resources on the LAN device, the device can automatically add port mapping entries to realize traversal of some services between internal and external networks. The following commonly used programs support the UPnP protocol: MSN Messenger, Thunder, BT, and PPLive.

Before you use the UPnP service, note that clients (PCs and mobile phones) used in combination also support UPnP.



Note

To implement automatic port mapping using UPnP, the following conditions must be met:

- UPnP is enabled on the device.
- The operating system of the LAN host supports UPnP and has UPnP enabled.
- The programs support UPnP and have UPnP enabled.

4.14.2 Configuring UPnP

Choose **One-Device > Gateway > Config > Advanced > UPnP**.

Turn on Enable to enable the UPnP function. Select a port from the drop-down list box of **Default Interface**. Click **Save** to make the configuration take effect.

If any relevant program converts the port automatically, the information is displayed in the **UPnP List** section.

UPnP (Universal Plug and Play) is a new Internet protocol aimed at improving communication between devices. ⓘ

Enable ☒

Default Interface

Save

UPnP List

Protocol	App	Client IP Address	Internal Port	External Port
No UPnP Device				

Table 4-38 UPnP configuration

Parameter	Description
Enable	Specify whether to enable UPnP. By default, UPnP is disabled.

Default Interface	Specify the WAN interface address bound to the UPnP service. By default, the default interface is a WAN interface. On the device with multiple WAN interfaces, you can manually select the WAN interface to bind or set this parameter to Auto to allow the device to select a WAN interface automatically.

4.14.3 Verifying Configuration

After the UPnP service is enabled, open a program that supports the UPnP protocol (such as Thunder or BitComet) on the client used with the device, and refresh the Web page on the device. If a UPnP entry is displayed in the UPnP list, a UPnP tunnel is created successfully.

4.15 Dynamic DNS

4.15.1 Overview

After the Dynamic Domain Name Server (DDNS) service is enabled, external users can use a fixed domain name to access service resources on the device over the Internet at any time, without the need to search for the WAN interface IP address. You need to register an account and a domain name on the third-party DDNS service provider for this service. The device supports No-IP DNS and Other DNS.

4.15.2 Getting Started

Before you use the DDNS service, register an account and a domain name on the DDNS or No-IP official website.

4.15.3 Configuring DDNS

1. No-IP DNS

Choose **One-Device > Gateway > Config > Advanced > Dynamic DNS > No-IP DNS**.

Enter the registered username and password and click Log In to initiate a connection request to the server. The binding between the domain name and WAN interface IP address of the device takes effect.

Click Delete to clear all the entered information and remove the server connection relationship.

The **Link Status** parameter specifies whether the server connection is established successfully. If you do not specify the domain name upon login, the domain name list of the current account is displayed after successful connection. All the domain names of this account are parsed to the WAN interface IP address.

No-IP DNS

Other DNS

* Service Interface

* Username [Register](#)

* Password

Domain (?)

IPv6 ☒ Disable ☐ Enable

[Log In](#) [Delete](#)

Link Status -

Domain -

**Note**

- Both No-IP DNS and other DNS support IPv6 connectivity.
- To ensure compatibility with the IPsec VPN functionality, you are advised to enable IPv6 when IPv6 is used for IPsec VPN connection.

Table 4-39 DDNS login information

Parameter	Description
Service Interface	One domain name can be parsed to only one IP address. Therefore, you need to specify the WAN interface bound to the domain name when multiple WAN interfaces are available. By default, the service interface is a WAN interface.
Username / Password	Enter the username and password of the account registered on the official website. If no registered account is available, click Register to switch to the official website and create a new account.

Parameter	Description
Domain	Specify the domain name bound to the service interface IP address. This parameter is optional for No-IP DNS. One account can be bound to multiple domain names. You can choose to bind only one domain name to the IP address of the current service interface. Only the selected domain name is parsed to the WAN interface IP address. If no domain name is specified, all the domain names of the current account are parsed to the WAN interface IP address.

2. Other DNS

Choose **One-Device > Gateway > Config > Advanced > Dynamic DNS > Other DNS**.

Select the service provider and service interface, enter the username and password for login, and click **Log In** to initiate a connection request to the server to make the binding relationship between the domain name and the device WAN interface IP address effective.

Clicking **Delete** will clear all input information and disconnect from the server.

The connection status indicates whether a connection has been successfully established with the server.

 **DynDNS**

* Service Provider

* Service Interface

* Username

* Password

* Domain

Log In

Delete

Link Status -

Table 4-40 DDNS Login Information

Parameter	Description
Service provider	An organization that provides dynamic domain name services, such as 3322.2org, cloudflare. com v4, and aliyun.

Parameter	Description
Service Interface	One domain name can be parsed to only one IP address. Therefore, you need to specify the WAN interface bound to the domain name when multiple WAN interfaces are available. By default, the service interface is a WAN interface.
Username / Password	Enter the username and password of the account registered on the official website.
Domain	Specify the domain name bound to the service interface IP address.

**Note**

- Both No-IP DNS and other DNS support IPv6 connectivity.
- To ensure compatibility with the IPsec VPN functionality, you are advised to enable IPv6 when IPv6 is used for IPsec VPN connection.

3. Verifying Configuration

If **Link Status** is displayed as **Connected**, the server connection is established successfully. After the configuration is completed, ping the domain name from the Internet. The ping succeeds and the domain name is parsed to the WAN interface IP address.

4.16 Connecting to IPTV

**Caution**

To connect to IPTV in the Chinese environment, switch the system language. For details, see [Section 13.14 Switching System Language](#).

IPTV is a network television service provided by the ISP.

4.16.1 Getting Started

- Confirm that the IPTV service is activated.
- Check the local IPTV type: VLAN or IGMP. If the type is VLAN, confirm the VLAN ID. If you cannot confirm the type or VLAN ID, contact the local ISP.

4.16.2 Configuration Steps (VLAN Type)

Choose **One-Device > Gateway > Config > Network > IPTV > IPTV/VLAN**.

Select a proper mode based on your region, click the drop-down list box next to the interface to connect and select **IPTV**, and enter the VLAN ID provided by the ISP. For example, when you want to connect the IPTV set top box to LAN 3 port of the device and the VLAN ID is 20, the configuration UI is as follows.

Internet VLAN: If you need to set a VLAN ID for the Internet access service, turn on this parameter and enter the VLAN ID. By default, the VLAN tag function is disabled. You are advised to keep the VLAN tag function disabled unless otherwise specified.

After the configuration is completed, confirm that the IPTV set top box is connected to the correct port, for example, LAN 3 in the example.

 Caution

Enabling this function may lead to network disconnection. Exercise caution when performing this operation.

* Mode	Custom	▼
* AG	Internet	▼
* AG	Internet	▼
* LAN0	Internet	▼
* LAN1	Internet	▼
* LAN2	Internet	▼
* LAN3	Internet	▼
* LAN4/WAN3	Internet	▼
* LAN5/WAN2	Internet	▼

Internet VLAN (WAN) ☐ 802.1Q Tag

Save

4.16.3 Configuration Steps (IGMP Type)

Choose **One-Device > Gateway > Config > Network > IPTV > IPTV/IGMP**.

The IGMP type is applicable to the ISP FPT. After you enable IPTV connection, connect the IPTV set top box to any LAN port on the router.

Enable ☒

Save

4.17 Limiting the Number of Connections

Choose **One-Device > Gateway > Config > Advanced > Session Limit**.

This function is used to control the maximum number of connections per IP address.

Click **Add** to add an IP session limit rule.

Rule List 

+ Add
Delete Selected

☐	Name 	User Group	Application List	Time	Total Connections	Total Connections per IP	Connected 	Status 	Match Order	Action
No Data										

Up to 20 entries can be added.

Add



* Name 

Type ☒ User Group ☐ Custom

* User Group  Select

Total Connections No Limit

Total Connections per IP No Limit

Status  ☐

Advanced Settings

Application ☒ All Applications ☐ App Group ☐ Custom

Time  All Time

Apply To ☒ Total ☐ Specified port

Cancel

OK

Table 4-41 IP session limit rule information

Parameter	Description
Name	Enter the name of the IP session limit rule.

Parameter	Description
Type	Select the rule type: ● User Group: The rule takes effect on the specified user group. ● Custom: The rule takes effect on the custom IP address range.
User Group	Select the user group from the list. For details about the user group list, see Section 9.2.2 User Group. If all members of the user group are selected, the rule applies to the entire user group, including future members added to the group. Note: This field is required only when the rule Type is set to User Group.
Start IP Address	Enter the start IP address for session matching in the rule.
End IP Address	Enter the end IP address for session matching in the rule.
Total Connections	Specify the total number of sessions for all IP addresses matching this rule.
Total Connections per IP	Specify the maximum number of sessions per IP address for all IP addresses matching this rule.
Status	Specify whether the rule is effective. The rule takes effect after you turn on this parameter.
Application	After an application is selected, the rule will take effect on the specified application. ● All Applications: The rule takes effect on all applications. ● App Group: Select an application group defined in 9.4.4 Custom Application Group from the drop-down list box. The rule takes effect on applications in the selected application group. ● Custom: The rule takes effect on specified applications in the application list.
Time	The rule is effective in the selected time period. Select a time period from the time periods defined in 9.3 Time Management from the drop-down list, or select Custom to manually configure a time period.
Apply To	Set the application scope of the rule: ● Total: The rule applies to the entire device. ● Specified port: Select the interfaces to which the session count limit will be applied. The rule will be applied to the selected interfaces only.

4.18 Configuring Local Security

4.18.1 Configuring an Admin IP Address

Admin IP addresses are exempt from the ping prohibition function. Packets sent from admin IP addresses can pass through and will not be discarded.

Choose **One-Device > Gateway > Config > Security > Local Security > Security Zone**.

Click **Add**. Then, you can configure admin IP address information.

Up to 8 entries can be added.

Admin IP Address			
		+ Add	Delete Selected
☐	Username	IP Range/Interface	Action
☐	admin	WAN0	Edit Delete

Up to 32 entries can be added.

Total 1 [1](#) 10/page

1. Configuring an Admin IP Address (Based on an IP Address)

Add

×

* Username

Specified Mode ☒ IP Range ☐ Interface

Please enter an IP address or range.

Cancel

OK

- (1) Configure a name for the admin IP address.

The name is a string of 1–32 characters.

- (2) Set **Specific Mode** to **IP Range**.

- (3) Configure an IP address.

You can specify a single IP address or an IP address range.

2. Configuring an Admin IP Address (Based on a Port)

Add

✕

* Username

Specified Mode ☐ IP Range ☒ Interface

Select

▼

Cancel

OK

- (1) Configure a name for the admin IP address.

The name is a string of 1–32 characters.

- (2) Set **Specific Mode** to **Interface**.

- (3) Specify the port.

You can select a LAN port or WAN interface as the interface.

3. Deleting an Admin IP Address

- Select an entry and click **Delete** to delete information about the admin IP address.
- Select multiple entries and click **Delete Selected** to bulk delete selected entries.

Admin IP Address

+ Add

Delete Selected

☐	Username	IP Range/Interface	Action
☐	admin	WAN0	Edit Delete
☐	test	WAN1	Edit Delete

Up to 32 entries can be added.

Total 2

<

1

>

10/page ▼

4. Editing Information About an Admin IP Address

You cannot modify the name and specified mode of an admin IP address but modify the IP address range or port in the specified mode.

Edit

✕

* Username

test

Specified Mode



IP Range



Interface

192.168.10.1

Cancel

OK

Edit

✕

* Username

admin

Specified Mode



IP Range



Interface

WAN0



Cancel

OK

4.18.2 Configuring Security Zones



Note

For devices that do not support SNMP, the SNMP service cannot be disabled in a LAN zone.

A security zone is a logical zone consisting of a group of systems that trust each other and share the same security protection requirements. Generally, a security zone consists of a group of interfaces. Networks formed by interfaces in the same security zone share the same security attributes. Each interface can only belong to one security zone.

- Up to eight security zones can be added.
- Pre-defined security zones include:
 - Pre-defined LAN zone: By default, all VLANs are mapped to the pre-defined LAN zone.
 - Pre-defined WAN zone: By default, all WAN interfaces are mapped to the pre-defined WAN zone.

Choose **One-Device > Gateway > Config > Security > Local Security > Security Zone**.

Security Zone ?

[+ Add](#)
[Delete Selected](#)

☐	Name	Network Interface	Accessible Security Zones	Authorized Security Zones	Disabled Service	Action
☐	Default LAN Zone	LAN Default VLAN VLAN 555 VLAN 55	Default WAN Zone Default Route Zone			Edit Delete
☐	Default WAN Zone	WAN WAN1 WAN0		Default LAN Zone		Edit Delete
☐	Default Route Zone	WAN	Default LAN Zone	Default LAN Zone		Edit Delete

Up to 8 entries can be added.

- (1) Click **Add**.
- (2) Configure parameters for the security zone.

Add



* Name

* Network Interface ☒ LAN ☐ WAN

Select

Accessible Security
Zones

Default LAN Zone ☐
Default WAN Zone ☐
Default Route Zone ☐

Authorized Security
Zones

Default LAN Zone ☐

Disabled Service ? ☐ WEB ☐ PING ☐ DNS

☐ DHCP ☐ SNMP

Cancel

OK

Table 4-42 Description of Security Zone Configuration Parameters

Parameter	Description
Name	Name of the security zone.
Network Interface	Interfaces mapped to the security zone, including LAN and WAN. LAN refers to VLAN, and WAN refers to WAN interfaces. Note: After a new security zone is created and VLANs or WAN interfaces are mapped to this new security zone, the VLANs or WAN interfaces will be removed from the pre-defined LAN zone or pre-defined WAN zone.
Accessible Security Zones	Other security zones to which this security zone can access.
Authorized Security Zones	Other security zones that can access this security zone.
Disabled Service	Services prohibited in this security zone: ● If PING is selected, clients in the security zone cannot ping the local device. ● If Web is selected: clients in the security zone cannot access the local web page. ● If DNS is selected, the address of the DNS server used by clients in the security zone is the local IP address, and web pages cannot be accessed normally. ● If DHCP is selected, clients in the security zone cannot obtain IP addresses. ● If SNMP is selected, clients in the security zone cannot use the SNMP service of the device.

(3) Click **OK**.

4.18.3 Configuring Session Attack Prevention

1. Overview

- Session Attack Prevention

In a session attack, an attacker sends heavy traffic to the device. In this case, the device has to consume many resources when creating connections. To reduce the impact of the attack, you can limit the rate of creating sessions.

- DDoS Attack Prevention

In a DDoS Attack, an attacker sends tremendous abnormal packets to a device. As a result, the device uses a large amount of resources to handle the packets. This causes the device performance to deteriorate or the system to break down.

If the value of TCP SYN and other TCP Flood parameters is too small, the authentication function and access to local web pages will be affected.

If the value of UDP Flood parameter is too small, the DHCP address allocation, DNS domain name resolution, and VPN functionalities will be affected.

You are advised to set the value to be greater than the load capacity of the local device.

- Suspicious Packet Attack Prevention

In a suspicious packet attack, an attacker sends tremendous error packets to the device. When the host or server handles the error packets, its system will crash.

2. Configuring Session Attack Prevention

Choose **One-Device > Gateway > Config > Security > Local Security > Attack Defense**.

- (1) Enable **Anti Session Attack**.

- (2) Configure the session creation rate limit, including global and per-IP values.

- (3) Click **Save**.

3. Configuring DDoS Attack Prevention

Choose **One-Device > Gateway > Config > Security > Local Security > Attack Defense**.

- (1) Select required attack prevention types and enable this feature.

- (2) Configure rate limiting.

- (3) Click **Save**.

4. Configuring Suspicious Packet Attack Prevention

Choose **One-Device > Gateway > Config > Security > Local Security > Attack Defense**.

- (1) Select required attack prevention types and validity check types to enable this feature.

- (2) To enable large ping attack prevention, enter the packet length.

- (3) Click **Save**.

5. Configuring Packet Receiving and Sending Control

Choose **One-Device > Gateway > Config > Security > Local Security > Attack Defense**.

- (1) Select the packet types that are prohibited from being sent by the device. Select at least one packet type.

☒ Disable ICMP Error Message ICMP Timeout (type:11) × 0 packets blocked Details

ICMP Packet Management ⓘ

☒ Disable ICMPv6 Error Message Time Exceeded × 0 packets blocked Details

- o Enable **Disable ICMP Error Messages**. You can select **ICMP Timeout**, **Destination Unreachable**, **Redirection**, and **Parameter**.

☐ Anti Large Ping Attack Packet Length 4000

☐ Anti Fraggle Attack

Anti Malformed Packet Attack medium ⓘ

☒ ICMP Validity Check ⓘ 0 packets blocked

☐ IP Protocol Validity Check ⓘ

☒ Disable ICMP Error Messages ICMP Timeout (type:11) × 0 packets blocked Details

☒ Disable ICMPv6 Error Messages Time Exceeded × 0 packets blocked Details

Destination Unreachable (type:3)
 Redirection (type:5)
☒ ICMP Timeout (type:11)
 Parameter (type:12)

- o Enable **Disable ICMPv6 Error Message**. You can select **Destination Unreachable**, **Datagram too Big**, **Time Exceeded**, and **Parameter Problem**.

☒ Disable ICMP Error Messages ICMP Timeout (type:11) × 0 packets blocked Details

ICMP Packet Management ⓘ

☒ Disable ICMPv6 Error Messages Time Exceeded × 0 packets blocked Details

Destination Unreachable
 Datagram Too Big
☒ Time Exceeded
 Parameter Problem

(2) Click **Save**.

4.18.4 Checking the Security Log

Choose **One-Device > Gateway > Config > Security > Local Security > Security Log**.

Check defense results of the device against various attacks on the **Security Log** page.

Refresh Every 10s ▾

Security Log Search Last 1 week ▾

Timestamp ▾	Attack Type ⓘ	Severity ⓘ	Description
The device has been running safely for 3 days			

Total 0 < 1 > 10/page ▾

4.19 Configuring TTL Rules

4.19.1 Overview

Time to live (TTL) aims to prevent unauthorized connections. It limits the number of devices that can transmit data packets in the network by limiting the existence time of the data packets in the computer network, so as to prevent infinite transmission of data packets in the network and the waste of resources.

When TTL is set to 1 and is valid for LANs, packets are directly discarded when passing through the next router. If a user connects a router to Ruijie device without permission and connects a client to the router, packets cannot pass through the client, either. This restriction prevents users from connecting routers without permission.



Note

- Changing the TTL affects packet forwarding on the network.
- The following data packets are not affected by this function: data packets forwarded by the express forwarding function of the device, data packets used by Wi-Fi cracking software (Cheetah Wi-Fi) to implement hotspot sharing, data packets forwarded at L2, and data packets passing through devices with TTL changed.

4.19.2 Configuring TTL Rules

Choose **One-Device > Gateway > Config > Advanced > TTL Rule**.

This operation allows you to change the TTL value in packets forwarded to a specified IP address range or a specified port.

TTL Rule

+ Add

Delete Selected

☐	Rule Name	Dest IP Address	Outbound Interface	TTL Config Mode	Value	Action
No Data						

Up to 10 entries can be added.

Total 0

<

1

>

10/page

1. Configuring a TTL Rule

Add
×

* Rule Name

Specified Mode
☒ Dest IP Address
☐ Outbound Interface

Please enter an IP address or range.

TTL Config Mode
☒ TTL Value
☐ TTL Increment
☐ TTL Decrement

* Value

Cancel

OK

Table 4-43 Description of TTL Rule Configuration

Parameter	Description
Rule Name	Specify the name of a TTL rule.
Specified Mode	Specify the range for the rule to take effect: ● Dest IP Address: Indicates that the TTL rule takes effect on a specified IP address or range. ● Outbound Interface: Indicates that the TTL rule takes effect on a specified outbound interface.
TTL Config Mode	Configure a rule for TTL values in packets. ● TTL Value: Specifies the value, to which the TTL value is changed, after a data packet passes through the device. ● TTL Increment: Specifies the increment of the TTL value on the basis of the original value after a data packet passes through the device. ● TTL Decrement: Specifies the decrement of the TTL value on the basis of the original value after a data packet passes through the device.
Value	Configure the TTL value in packets. The value range is from 1 to 255.

2. Deleting a TTL Rule

- Click **Delete** to delete the configuration of a specified entry.
- Select multiple entries and click **Delete Selected** to bulk delete selected entries.

TTL Rule

[+ Add](#) [Delete Selected](#)

☐	Rule Name	Dest IP Address	Outbound Interface	TTL Config Mode	Value	Match Order	Action
☒	test1		WAN	TTL Value	64	↓	Edit Delete
☐	test2		WAN1	TTL Value	64	↑	Edit Delete

Up to 10 entries can be added.

Total 2 [<](#) **1** [>](#) [10/page](#)

3. Editing a TTL Rule

Click **Edit**. Change the TTL rule configuration mode and TTL value.

Edit ×

* Rule Name

Specified Mode ☐ Dest IP Address ☒ Outbound Interface

TTL Config Mode ☒ TTL Value ☐ TTL Increment
☐ TTL Decrement

* Value

[Cancel](#) [OK](#)

4. Adjusting the Sequence of TTL Rules

After configuring multiple TTL rules, you can adjust their sequence to specify the rule matching sequence. TTL rules in front rows are matched first, and those in back rows are matched later. If the ranges of rules overlap, the final effect is the superposition of multiple matching results.

TTL Rule

[+ Add](#) [Delete Selected](#)

☐	Rule Name	Dest IP Address	Outbound Interface	TTL Config Mode	Value	Match Order	Action
☐	test1		WAN	TTL Value	64	↓	Edit Delete
☐	test2		WAN1	TTL Value	64	↑	Edit Delete

Up to 10 entries can be added.

Total 2 [<](#) **1** [>](#) [10/page](#)

4.20 Disk Management

4.20.1 Configuring Local Storage Settings


Choose **Local Device** > **Advanced** > **Disk Management**.

On the **Local Storage** pane, you can view the usage of the local storage, along with usage details of NAT logs, DHCP logs, authentication logs, traffic logs, other storage space, and available storage space.

To set the maximum storage usage of an eMMC, simply drag the scroll bar and click **Save**.

Disk Management

Local Storage (EMMC)

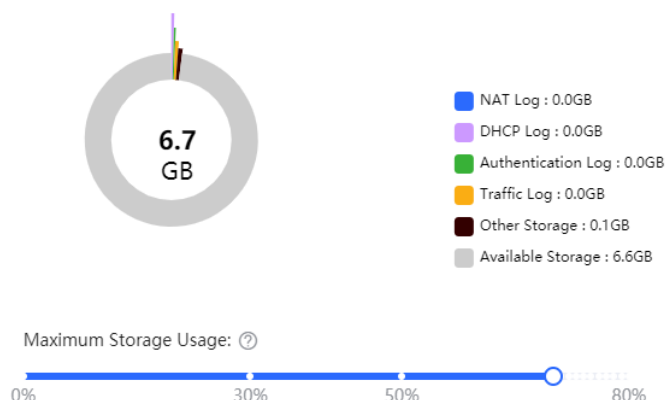

Caution


- If the actual space used for log storage exceeds the maximum storage usage limit, the oldest log entries will be overwritten. You are advised to set a proper maximum storage usage to prevent the deletion of critical logs.
- To prolong the service life of the eMMC, you are advised to set the maximum storage usage to 80% or below.

4.20.2 Configuring External Storage Settings

Choose **Local Device > Advanced > Disk Management**.

On the **External Storage** pane, you can view the usage of the external storage, along with usage details of NAT logs, DHCP logs, authentication logs, traffic logs, other storage space, and available storage space. To set the maximum storage usage of a hard disk drive, simply drag the scroll bar and click **Save**.

Click **More** to find the **Format Disk** option. You can format the hard disk drive using this option.

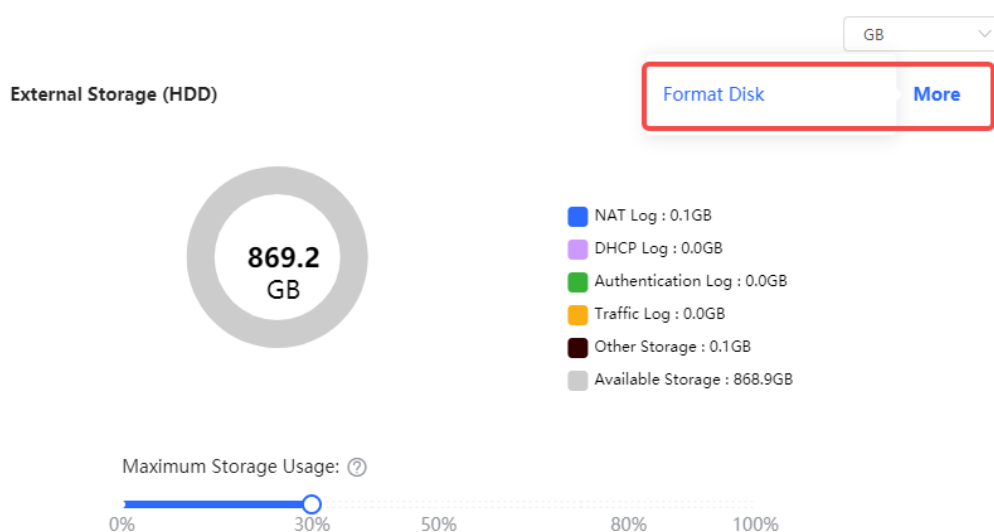

⚠ Caution

- If the actual space used for log storage exceeds the maximum storage usage limit, some logs will be deleted. You are advised to set a proper maximum storage usage to prevent the deletion of critical logs.
- Formatting the hard disk drive will cause data loss. Exercise caution when performing this operation.

4.20.3 Configuring Log Settings

Choose **Local Device > Advanced > Disk Management > Logs**.

The **Logs** feature enables you to manage the storage of various logs, including traffic logs, DHCP logs, authentication logs, and NAT logs. You can choose the specific types of logs to store, set the storage location, and define the log retention days. Then, click **Save** to apply the settings.

After the configuration is complete, you can access and query NAT logs, DHCP logs, and authentication logs stored on the device by going to **Local Device > Network > Audit Log Reports**. For traffic logs, you can query them under **Local Device > Device Overview > Traffic History**.

The screenshot displays the 'Logs' configuration interface. It features four distinct panels, each representing a different log type: Traffic Log (orange icon), DHCP Log (purple icon), Authentication Log (green icon), and NAT Log (blue icon). Each panel includes a toggle switch to enable or disable the log, a 'Location' dropdown menu (with 'Local storage' or 'External storage' as options), and a 'Retention Days' input field (currently set to 30). A blue 'Save' button is positioned centrally below the panels.

⚠ Caution


Exercise caution when setting the log retention period, as logs older than the specified duration will be overwritten.

4.21 Audit Log Reports

4.21.1 NAT Log

Choose **Local Device > Network > Audit Log Reports > NAT Log**.

- View log details
 - Select the date and time range to view NAT logs within that period. The logs will include information such as time, protocol, client, source IP, destination IP, source port, destination port, Tx bytes, and Rx bytes.
 - Click **Last Hour** or **Next Hour** to quickly retrieve NAT information from the hour before or after the current time.

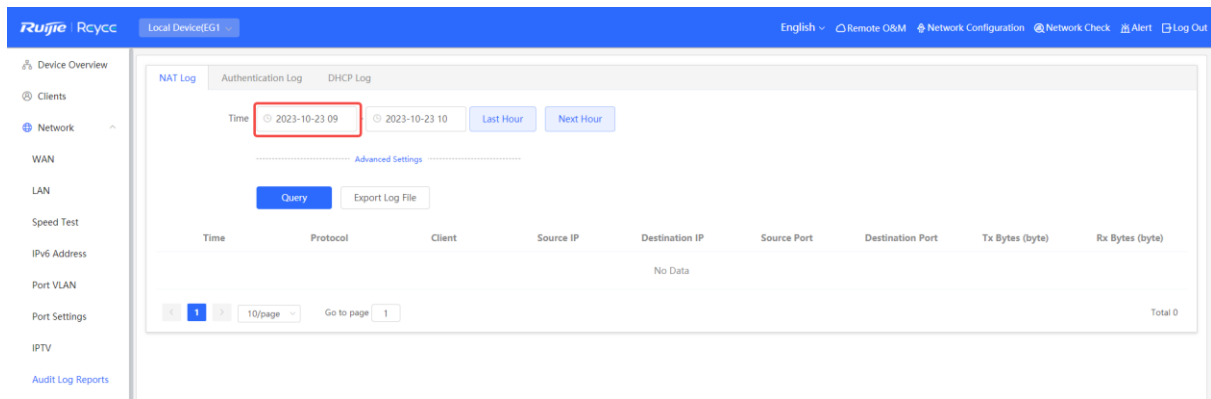


Note

The maximum log query interval is 12 hours.


- Export log file

Click **Export Log File** to export NAT logs within the selected period.

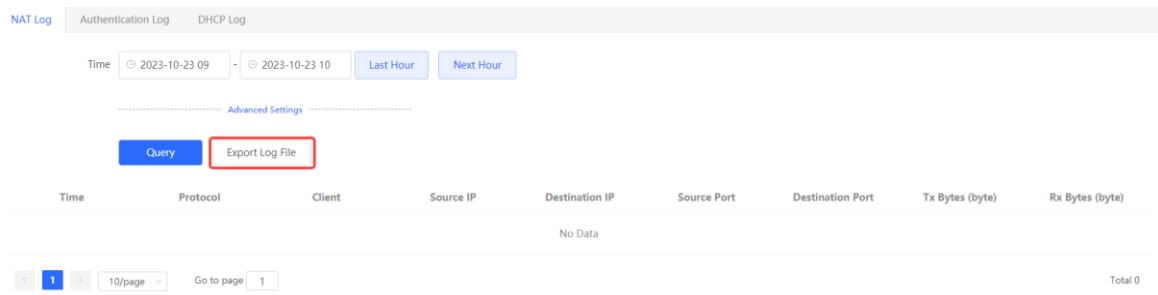

- Query NAT logs

Click **Advanced Settings** to query NAT logs based on protocol type, source IP + source port, or destination IP + destination port.

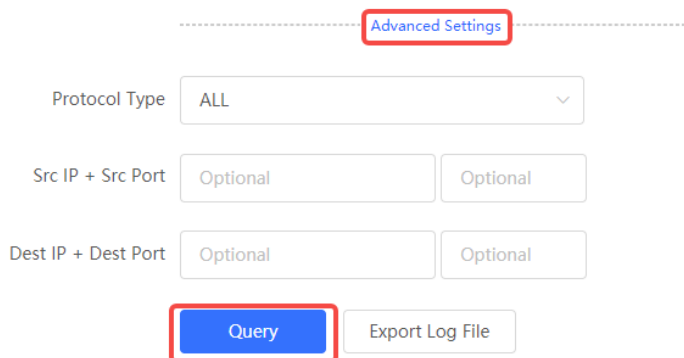

4.21.2 Authentication Log

Choose **Local Device** > **Network** > **Audit Log Reports** > **Authentication Log**.

- View log details

- Select the date and time range to view authentication logs within that period. The logs will include information such as time, username, MAC address, IP address, device SN and status.
- Click **Last Hour** or **Next Hour** to quickly retrieve authentication information from the hour before or after

the current time.



Note

The maximum log query interval is 12 hours.

- Export log file

Click **Export Log File** to export authentication logs within the selected period.

- Query authentication logs

Click **Advanced Settings** to query authentication logs based on username, IP address, or MAC address.

4.21.3 DHCP Log

Choose **Local Device > Network > Audit Log Reports > DHCP Log**.

- View log details

- Select the date and time range to view DHCP logs within that period. The logs will include information such as time, username, MAC address, IP address, and offline time.
- Click **Last Hour** or **Next Hour** to quickly retrieve DHCP information from the hour before or after the current time.

Note

The maximum log query interval is 12 hours.

- **Export log file**
Click **Export Log File** to export DHCP logs within the selected period.

- **Query DHCP logs**
Click **Advanced Settings** to query DHCP logs based on IP address or MAC address.

4.22 Configuring Audit Log

Choose **One-Device** > **Gateway** > **Config** > **Advanced** > **Audit Log**.

After the **Audit Log** function is enabled and configured, the system uploads audit logs of the selected log type to the specified server.

- (1) Toggle on **Enable** to enable the **Audit Log** function.

i The port ID of the device must be consistent with that of the peer server.
The server logs can be divided into three levels: high, medium and low.

Enable ☒

* Server Type

* Server Address

* Port 1-65535

* Log Sending Rate (log/s)

Log Type ☒ DHCP Log ☒ NAT Log

☒ URL Log ☒ Auth User Log

(2) Configure parameters of the **Audit Log** function.

Table 4-44 Audit Log Configuration Parameters

Parameter	Description
Server Type	Server type. The device supports the following three server types: ● Default: Default server type. ● turkiye-5651: Local server in Türkiye. ● Thailand: Local server in Thailand.
Server Address	Address of the log server. It can be a domain name and an IPv4 address.
Port	Port number of the server, which can be a custom port number. The default port number is 514.
Log Sending Rate	Rate at which the device sends audit logs to the server. The default rate is 5000 logs per second. The value ranges from 1 log per second to 10000 logs per second.
Log Type	Types of logs to be sent to the server, including DHCP logs, NAT logs, URL logs, and authentication user logs. Priority of sending audit logs: High , Medium , and Low . When the device resources are limited, audit logs with higher priority are sent to the server first.

(3) Click **Save**.

Click **Show Log Status** to view the status of the **Audit Log** function, including the server address, server connection status, and the sending history of each log type (including received, sent, and discarded logs).

Log Status



Server: 10.52.40.204:514

Server Type: default

Server Status: Connected

Log Sending Rate: 5000 (log/s)

NAT Log:	Received: 19223869	Sent: 19223869	Discarded: 51562
DHCP Log:	Received: 222	Sent: 222	Discarded: 0
URL Log:	Received: 11900136	Sent: 11900136	Discarded: 526
Auth User Log:	Received: 0	Sent: 0	Discarded: 0

Refresh

Cancel

4.23 Other Settings

Choose **One-Device > Gateway > Config > Advanced > Other Settings**.


You can set some functions not frequently used on the Other Settings page. By default, all the functions on this page are disabled.

 Note

Enable RIP&RIPng is only available on devices that do not support the OSPF protocol. The actual product version prevails.

Enable RIP&RIPng: After this function is enabled, LAN and WAN interfaces support dynamic routing protocols Routing Information Protocol (RIP) and RIP next generation (RIPng) and can automatically synchronize route information from other RIP-enabled routers in the network.

Enable SIP ALG: Some voice communication uses the Session Initiation Protocol (SIP) protocol. If the server is connected to a WAN interface, SIP packets may become unavailable after NAT. After you enable this function, SIP packets are converted by the application-level gateway (ALG). You can enable or disable this function based on actual needs.

 Other SettingsEnable RIP&RIPng ☒Encryption No Encryption Enable SIP ALG ☒ Save

5 AP Management

Note

- To manage the downlink AP, please enable self-organizing network discovery. For details, see Section [4.1 Switching the Work Mode](#). The wireless settings are synchronized to all wireless devices in the network by default. You can configure groups to limit the device scope under wireless management. For details, see Section [5.1 Configuring AP Groups](#).
- The device does not emit the Wi-Fi signals. Deliver the wireless settings to the downlink AP to take effect.

5.1 Configuring AP Groups

5.1.1 Overview

After self-organizing network discovery is enabled, the device can function as the master AP/AC to batch configure and manage its downlink APs by group. Before you configure the APs, divide them to different groups.


Note

If you specify groups when configuring the wireless network, the configuration takes effect on wireless devices in the specified groups.

5.1.2 Configuration Steps

Choose **Network-Wide > Devices > AP**.


- View the information of all APs in the current network, including the basic information, RF information, and model. Click the SN of an AP to configure the AP separately.

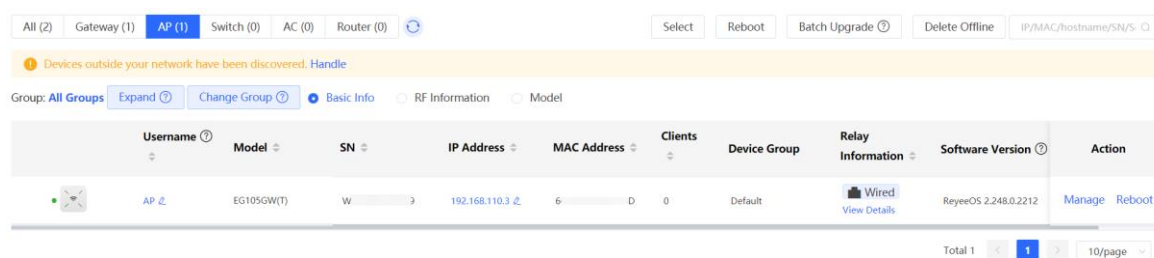

The screenshot shows the 'AP' management page. At the top, there are filters for device types: All (2), Gateway (1), AP (1), Switch (0), AC (0), and Router (0). There are also buttons for 'Select', 'Reboot', 'Batch Upgrade', and 'Delete Offline'. A yellow banner indicates 'Devices outside your network have been discovered. Handle'. Below this, there are tabs for 'Basic Info' (selected), 'RF Information', and 'Model'. The main table lists APs with columns: Username, Model, SN, IP Address, MAC Address, Clients, Device Group, Relay Information, Software Version, and Action. One AP is listed with SN 'W-3' and IP '192.168.110.3'. The 'Action' column has links for 'Manage' and 'Reboot'. At the bottom, it shows 'Total 1' and '10/page'.

Username	Model	SN	IP Address	MAC Address	Clients	Device Group	Relay Information	Software Version	Action
AP	EG105GW(T)	W-3	192.168.110.3	6-D	0	Default	Wired View Details	ReyeeOS 2.248.0.2212	Manage Reboot


- Click **Expand**. Information of all the current groups is displayed to the left of the list. Click  to create a group. You can create a maximum of eight groups. Select the target group and click  to modify the group name or click  to delete the group. You cannot modify the name of the default group or delete the default group.

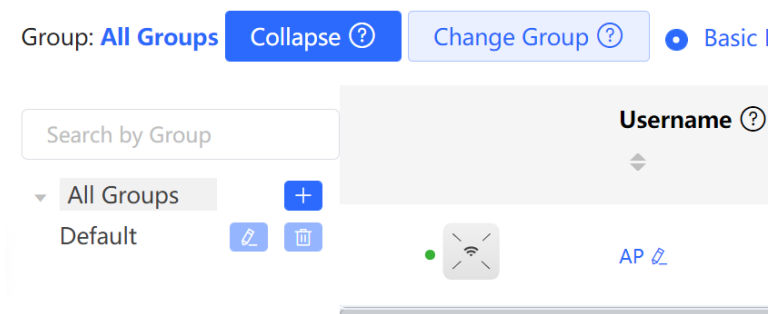

- (3) Click a group name in the left. All devices in the group are displayed. One device can belong to only one group. By default, all devices belong to the default group. Select a record in the device list and click **Change Group** to migrate the selected device to the specified group. After a device is moved to the specified group, the device will use the configuration for the new group. Click **Delete Offline Devices** to remove offline devices from the list.




Change Group

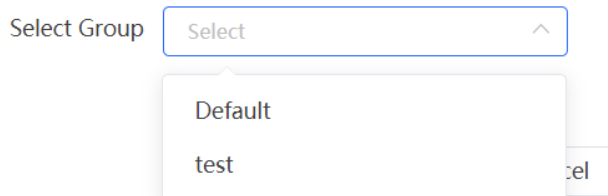

5.2 Configuring Wi-Fi

5.2.1 Adding a Wi-Fi Network

Choose **Network-Wide > Workspace > Wireless > Wi-Fi > Wi-Fi List**.

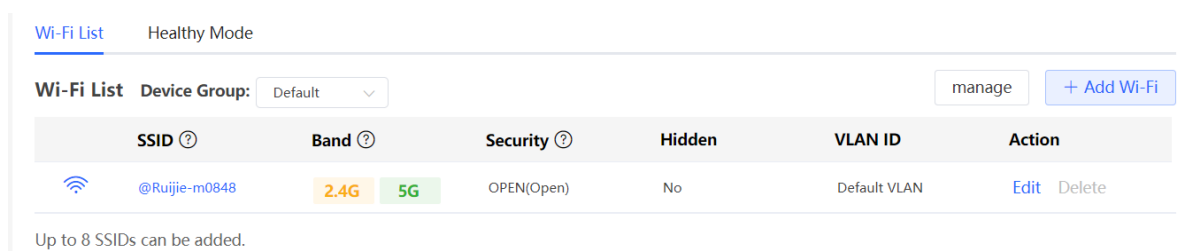

 Caution

Modification will cause restart of the wireless configuration, resulting in logout of connected clients. Exercise caution when performing this operation.

- (1) Click **Add Wi-Fi**, enter the SSID and Wi-Fi password, select purpose and a frequency band.

Add ×

* SSID ⓘ

Purpose ⓘ

General | IoT | Guest

Band ⓘ

☒ 2.4G ☒ 5G ☐ 6G

No available frequency band? Log in to Ruijie Cloud to add or re-identify the target frequency band. [Re-identify](#) [View Causes](#)

Encryption

☐ Open ☒ Security ☐ 802.1x (Enterprise) ⓘ

* Security ⓘ

WPA2-PSK

* Wi-Fi Password

⌵

----- Advanced Settings -----

Cancel

OK

- (2) Click **Advanced Settings** to configure more Wi-Fi parameters.

----- Advanced Settings -----

SSID Encoding

Wi-Fi Standard

Schedule

VLAN

Hide SSID ☐ The SSID is hidden and must be manually entered.

Client Isolation ☐ Prevent mutual access between clients connected to this SSID on this AP.

Layer 2 Isolation ☐ Prevent mutual access between clients connected to this SSID on all APs.

Band Steering ☒ The 5G-supported client will access 5G radio preferentially.

XPress ☐ The client will experience faster speed.

Layer 3 Roaming ☐ The client will keep the IP address unchanged on the Wi-Fi network.

802.11r ☐ After this feature is enabled, roaming time is reduced to achieve fast transition.

LimitSpeed ☐

[Do you want to edit RF parameters? Navigate to Radio Frequency for configuration.](#)

(3) Click **OK**.

Table 5-1 Wireless network configuration

Parameter	Description
SSID	Enter the name displayed when a wireless client searches for a wireless network.
Purpose	Set the Wi-Fi usage scenario. The options include General , IoT , and Guest . The system will recommend different Wi-Fi parameter combinations based on the selected purpose.

Parameter	Description
Band	Set the band used by the Wi-Fi signal. The options are 2.4 GHz, 5 GHz and 6 GHz. The 5 GHz band provides faster network transmission rate and less interference than the 2.4 GHz band, but is inferior to the 2.4 GHz band in terms of signal coverage range and wall penetration performance. The 6 GHz band has a higher network transmission rate and less interference compared to the 2.4 GHz and 5 GHz bands, but it is usually not as good as the 2.4 GHz and 5 GHz frequency bands in terms of signal coverage and wall penetration. Select a proper band based on actual needs. The default value is 2.4G + 5G, indicating that the device provides signals at both 2.4 GHz and 5 GHz bands.  Note In networks with APs supporting the 6 GHz frequency band, you'll see an additional '6G' option in the frequency settings. The 6 GHz-band provides faster data transmission rates, but it's worth noting that-not all access devices may fully support this band. The RG-RAP73HD supports the 6 GHz band.
Encryption	The encryption options for a Wi-Fi network include Open , Security , and 802.1x (Enterprise) .
Wi-Fi Password	When the Encryption is set to Security , you need to set the password for connecting to the wireless network. The password is a string of 8 to 63 characters.
Select server group	When the Encryption is set to 802. 1x (Enterprise) , you need to configure a remote server set for authentication and authorization.
SSID Encoding	The SSID encoding standard is set to "UTF-8" by default when Chinese characters are included in the SSID. If the Chinese characters are garbled, you can choose GB2312 as the SSID encoding standard.
Wi-Fi Standard	The Wi-Fi standards include 802.11be (Wi-Fi 7) , 802.11ax (Wi-Fi 6) , Compatibility Mode , or Auto . The final effective Wi-Fi standard depends on the support of Wi-Fi standards on each device. The latest standard is recommended. If there is a compatibility issue, try use an older standard. However, an old standard setting will affect the bandwidth.
Wireless Schedule	Specify the time periods during which Wi-Fi is enabled. After you set this parameter, users cannot connect to Wi-Fi in other periods.

Parameter	Description
VLAN	Set the VLAN to which the Wi-Fi signal belongs. You can choose from the available VLANs or click Add New VLAN , and go to the LAN Settings page to add a VLAN.
Hide SSID	Enabling the hide SSID function can prevent unauthorized user access to Wi-Fi, improving security. However, mobile phones or computers cannot find the SSID after this function is enabled. You must manually enter the correct name and password to connect to Wi-Fi. Record the current SSID before you enable this function.
Client Isolation	When enabled, devices connected to this Wi-Fi network under the same access point (AP) will be isolated from each other. This prevents end users from accessing other users on the same subnet, thereby enhancing security.
Layer 2 Isolation	When enabled, clients connected to this SSID are isolated from each other, and cannot access other clients connected to this SSID on all APs on Layer 2, thereby improving security.
Band Steering	After this function is enabled, 5G-capable clients select 5G Wi-Fi preferentially. You can enable this function only when Band is set to 2.4G + 5G .
XPress	After this function is enabled, the device sends game packets preferentially, providing more stable wireless network for games.
Layer-3 Roaming	After this function is enabled, clients keep their IP addresses unchanged when associating with the same Wi-Fi. This function improves the roaming experience of users in the cross-VLAN scenario.
802.11r	Enabling the 802. 11r function can shorten the roaming handover time. The 802. 11r function is supported only when Encryption is set to Security or 802. 1x (Enterprise). Once 802. 11r is enabled, the encryption type can only be WPA2-PSK or WPA2-802. 1X.  Note Only in networks with Wi-Fi 7 Products, Wi-Fi 6 Products and 16M Wi-Fi 5 Products supporting the 802.11r.
LimitSpeed	After enabling Wi-Fi rate limiting, you can set the uplink and downlink rate limits for users. ● Rate Limit Per User: The rate limit applies to all clients connected to the SSID. ● Rate Limit All Users: All clients connected to the SSID share the configured rate limit equally. The rate limit of each client changes dynamically with the number of clients connected to the SSID.

5.2.2 Configuring Guest Wi-Fi

Guest Wi-Fi, the Wi-Fi service provided for guests, is disabled by default. By default, user isolation is enabled for the guest Wi-Fi. That is, users connected to the guest Wi-Fi are isolated from each other and can only access the Internet through the Wi-Fi network, which improves security. Guest Wi-Fi can be disabled at a scheduled time. When the scheduled time arrives, the guest Wi-Fi is automatically disabled.

Choose **Network-Wide > Workspace > Wireless > Wi-Fi > Wi-Fi List**.

Click **Add Wi-Fi**, set the **Purpose** to **Guest**, and configure the Wi-Fi name and password. Click **Advanced Settings** to configure the effective time of the guest Wi-Fi and other Wi-Fi parameters. After the settings are saved, guests can connect to the Internet through the SSID and password. For details, see Section [5.2.1 Adding a Wi-Fi Network](#).

Add
×

* SSID ⓘ

@Ruijie-guest-1F9C

Purpose ⓘ

General | IoT | **Guest**

Band ⓘ

☒ 2.4G
☒ 5G
☐ 6G

No available frequency band? Log in to Ruijie Cloud to add or re-identify the target frequency band. [Re-identify](#) [View Causes](#)

Encryption ⓘ

☐ Open
☒ Security
☐ 802.1x (Enterprise) ⓘ

* Security ⓘ

WPA2-PSK

* Wi-Fi Password ⓘ

👁

Advanced Settings

Cancel

OK

Note

In networks with APs supporting the 6 GHz frequency band, you'll see an additional '6G' option in the frequency settings. The RG-RAP73HD supports the 6 GHz band.

5.2.3 Managing Wi-Fi Networks

Choose **Network-Wide > Workspace > Wireless > Wi-Fi > Wi-Fi List**.

(1) Click **manage** to batch manage Wi-Fi networks.

Wi-Fi List Healthy Mode

Wi-Fi List Device Group: Default manage + Add Wi-Fi

	SSID ?	Band ?	Security ?	Hidden	VLAN ID	Action
	@Ruijie-m0848	2.4G 5G	OPEN(Open)	No	Default VLAN	Edit Delete
	test	2.4G 5G	OPEN(Open)	No	Default VLAN	Edit Delete

Up to 8 SSIDs can be added.

(2) Batch manage Wi-Fi networks.

- o Batch enable Wi-Fi networks: Select the desired Wi-Fi networks, and click **Enable**.

Wi-Fi List Device Group: Default Enable Disable Delete Exit + Add Wi-Fi

	SSID ?	Band ?	Security ?	Hidden	VLAN ID
☒	@Ruijie-m0848	2.4G 5G	OPEN(Open)	No	Default VLAN
☐	test	2.4G 5G	OPEN(Open)	No	Default VLAN

Up to 8 SSIDs can be added.

- o Batch disable Wi-Fi networks: Select the desired Wi-Fi networks, and click **Disable**.

Wi-Fi List Device Group: Default Enable Disable Delete Exit + Add Wi-Fi

	SSID ?	Band ?	Security ?	Hidden	VLAN ID
☒	@Ruijie-m0848	2.4G 5G	OPEN(Open)	No	Default VLAN
☒	test	2.4G 5G	OPEN(Open)	No	Default VLAN

Up to 8 SSIDs can be added.

- o Batch delete Wi-Fi networks: Select the desired Wi-Fi networks, and click **Delete**.

Wi-Fi List Device Group: Default Enable Disable Delete Exit + Add Wi-Fi

	SSID ?	Band ?	Security ?	Hidden	VLAN ID
☒	@Ruijie-m0848	2.4G 5G	OPEN(Open)	No	Default VLAN
☒	test	2.4G 5G	OPEN(Open)	No	Default VLAN

Up to 8 SSIDs can be added.

(3) Click **Exit** to exit Wi-Fi network batch management.

Wi-Fi List Healthy Mode

Wi-Fi List Device Group: Default Enable Disable Delete Exit + Add Wi-Fi

	SSID ?	Band ?	Security ?	Hidden	VLAN ID
☐	LJW_55	2.4G	WPA2-PSK	No	The same VLAN as AP
☐	1	2.4G 5G	OPEN(Open)	No	The same VLAN as AP
☐	TEST	2.4G 5G	OPEN(Open)	No	The same VLAN as AP

Up to 8 SSIDs can be added.

5.3 Healthy Mode

Choose **Network-Wide** > **Workspace** > **Wireless** > **Wi-Fi** > **Healthy Mode**.

Turn on healthy mode and select a wireless schedule for the mode.

After the healthy mode is enabled, the RF transmit power and Wi-Fi coverage range of the device are reduced in the schedule. This may lead to weak signals and network freezing. You are advised to disable healthy mode or set the wireless schedule to the idle periods.

Healthy Mode Device Group: Default 

Enable  

Effective Time  All Time 

Save

5.4 RF Settings

Choose **Network-Wide** > **Workspace** > **Wireless** > **Radio Setting**.

The device can detect the surrounding wireless environment upon power-on and select proper configuration. However, network freezing caused by wireless environment changes cannot be prevented. You can analyze the wireless environment around the APs and routers and manually select proper parameters.

 Caution

Modification will cause restart of the wireless configuration, resulting in logout of connected clients. Exercise caution when performing this operation.

Radio Setting Device Group: Default [Not solved yet? Click here to access the Network Optimization page for automatic optimization](#)

Common Parameter No available frequency band? Log in to Ruijie Cloud to add or re-identify the target frequency band. [Re-identify](#) [View Causes](#)

Country/Region United States (US)

Radio Parameters

2.4G

5G

6G

Global Radio Settings

Channel Width ? Auto

Multicast Rate (Mbps) ? Auto

Client Count Limit ? ☐

Disconnection Threshold ? Disable -85dBm -65dBm

Save

 Note

In networks with APs supporting the 6 GHz frequency band, you'll see an additional '6G' option in the frequency settings. The RG-RAP73HD supports 6 GHz band.

Table 5-2 RF configuration

Parameter	Description
Country/Region	The Wi-Fi channels stipulated by each country may be different. To ensure that clients can find the Wi-Fi signal, select the country or region where the device is located.
2.4G/5G/6G Channel Width	A lower bandwidth indicates more stable network, and a higher bandwidth indicates easier interference. In case of severe interference, select a relatively low bandwidth to prevent network freezing to certain extent. The 2.4 GHz band supports the 20 MHz and 40 MHz bandwidths. The 5 GHz band supports the 20 MHz, 40 MHz, 80 MHz and 160 MHz bandwidths. The 6 GHz band supports the 20 MHz, 40 MHz, 80 MHz, 160 MHz and 320 MHz bandwidths. By default, the value is Auto, indicating that the bandwidth is selected automatically based on the environment.
Multicast Rate (Mbps)	Select the data rate of broadcast and multicast packets. - Tip: A higher multicast rate may lead to a higher multicast packet loss rate. A lower multicast rate may cause heavier traffic on the wireless air interface. - Suggestion: Use a high rate in the case of severe network congestion and a medium rate in the case of mild network lag.

Parameter	Description
Client Count Limit	If a large number of users access the AP or router, the wireless network performance of the AP or router may be degraded, affecting users' Internet access experience. You can toggle on the Client Count Limit toggle switch to set a client limit. After you set this parameter, new user access is prohibited when the number of access users reaches the specified value. If the clients require high bandwidth, you can adjust this parameter to a smaller value. You are advised to keep the default value unless otherwise specified.
Disconnection Threshold	When multiple Wi-Fi signals are available, you can set this parameter to optimize the wireless signal quality to some extent. When a client is far away from the wireless device, the Wi-Fi connection is disconnected when the wireless signal strength of the end user is lower than the kick-off threshold. In this case, the client has to select a nearer wireless signal. The client is prone to be kicked off if the kick-off threshold is high. To ensure that the client can normally access the Internet, you are advised to set this parameter to Disable or a value smaller than -75 dBm.

**Note**

- Wireless channels available for your selection are determined by the country/region code. Select the country/region code based on the country or region of your device.
- Channel, transmit power, and roaming sensitivity cannot be set globally. Please perform the configurations on the devices separately.

5.5 Configuring Wi-Fi Blocklist or Allowlist

5.5.1 Overview

You can configure the global or SSID-based blocklist and allowlist. The MAC address supports full match and OUI match.

Wi-Fi blocklist: Clients in the Wi-Fi blocklist are prevented from accessing the Internet. Clients that are not added to the Wi-Fi blocklist are free to access the Internet.

Wi-Fi allowlist: Only clients in the Wi-Fi allowlist can access the Internet. Clients that are not added to the Wi-Fi allowlist are prevented from accessing the Internet.

**Caution**

If the allowlist is empty, the allowlist does not take effect. In this case, all clients are allowed to access the Internet.

5.5.2 Configuring a Global Blocklist/Allowlist

Choose **Network-Wide > Workspace > Wireless > Blocklist and Allowlist > Global Blocklist/Allowlist**.

Select the blocklist or allowlist mode and click **Add** to configure a blocklist or allowlist client. In the **Add** dialog box, enter the **Device Name**, **Match Type** and **MAC Address** of the target client and click **OK**. If a client is already associated with the router, its MAC address will pop up automatically. Click the MAC address directly for automatic input. All clients in the blocklist will be forced offline and not allowed to access the Wi-Fi network. The global blocklist and allowlist settings take effect on all Wi-Fi networks of the router.

Global Blocklist/Allowlist SSID-Based Blocklist/Allowlist

☒ All STAs except blocklisted STAs are allowed to access Wi-Fi.
 ☐ Only the allowlisted STAs are allowed to access Wi-Fi.

Blocked WLAN Clients + Add Delete Selected

☐	Device Name	MAC Address	Action
☐	test ↗		Edit Delete

Up to 512 members can be added. Total 1 < 1 > 10/page

Add ×

Device Name ?

Match Type ☒ Full ☐ Prefix (OUI)

* MAC Address

Cancel OK

If you delete a client from the blocklist, the client will be allowed to connect to the Wi-Fi network.

If you delete a client from the allowlist, the client will be forced offline and denied access to the Wi-Fi network.

Blocked WLAN Clients + Add Delete Selected

☐	Device Name	MAC Address	Action
☐	test ↗		Edit Delete

Up to 512 members can be added. Total 1 < 1 > 10/page

5.5.3 Configuring an SSID-based Blocklist/Allowlist

Choose **Network-Wide > Workspace > Wireless > Blocklist and Allowlist > SSID-Based Blocklist/ Allowlist**.

Select a target Wi-Fi network from the left column, select the blocklist or allowlist mode, and click **Add** to configure a blocklist or allowlist client. The SSID-based blocklist and allowlist will restrict the client access to the specified Wi-Fi.

Blocklist/Allowlist is used to allow or reject a client's request to connect to the Wi-Fi network.

Note: OUI matching rule and SSID-based blocklist/allowlist are supported by only RAP Net and P32 (and later versions).

Rule:

1. In the Blocklist mode, the clients in the blocklist are not allowed to connect to the Wi-Fi network.
2. In the Allowlist mode, only the clients in the allowlist are allowed to connect to the Wi-Fi network.

Device Group: Default

SSID-Based Blocklist/Allowlist

@Ruijie-m6649

test

☒ All STAs except blocklisted STAs are allowed to access Wi-Fi.
 ☐ Only the allowlisted STAs are allowed to access Wi-Fi.

Blocked WLAN Clients

+ Add Delete Selected

☐	Device Name	MAC Address	Action
No Data			

Up to 512 members can be added. Total 0 < 1 > 10/page

5.6 Configuring AP Load Balancing

5.6.1 Overview

The AP load balancing function is used to balance the load of APs in the wireless network. When APs are added to a load balancing group, clients will automatically associate with the APs with light load when the APs in the group are not load balanced. AP load balancing supports two modes:

- **Client Load Balancing:** The load is balanced according to the number of associated clients. When a large number of clients have been associated with an AP and the count difference to the AP with the lightest load has reached the specified value, the client can only associate with another AP in the group.
- **Traffic Load Balancing:** The load is balanced according to the traffic on the APs. When the traffic on an AP is large and the traffic difference to the AP with the lightest load has reached the specified value, the client can only associate with another AP in the group.

Example: Add AP1 and AP2 into a group and select client load balancing. Set both the client count threshold and difference to 3. AP1 is associated with 5 clients and AP2 is associated with 2 clients, triggering load balancing. New clients' attempt to associate to AP1 will be denied, and therefore they can associate only with AP2.

After a client request is denied by an AP and it fails to associate with another AP in the group, the client will keep trying to associate with this AP. If the client attempts reach the specified value, the AP will permit connection of this client, ensuring that the user can normally access the Internet.

5.6.2 Configuring Client Load Balancing

Choose **Network-Wide > Workspace > Wireless > Load Balancing**.

Click **Add**. In the dialog box that appears, set **Type** to **Client Load Balancing**, and configure **Group Name**, **Members**, and **Rule**.

Load Balancing

+ Add

Delete Selected

By grouping APs in the same area into a load balancing group, they can collaborate to control the access of wireless clients and to achieve optimal traffic distribution.

For example, when AP1 and AP2 are added to the same load balancing group, with the load balancing type set to Client Load Balancing and a strategy to trigger load balancing when one AP has 3 clients and the load-balancing threshold is 3, if AP1 has 5 clients and AP2 has 2 clients, any new client trying to connect to AP1 will be denied access and redirected to AP2, achieving load balancing between the two APs.

☐	Group Name	Type	Rule	Members	Action
No Data					

Up to 32 entries can be added.

Add

✕

* Group Name

* Type

* Rule

Load balancing is triggered when the number of clients connected to an AP in a group reaches , and the client count difference between the AP and other APs in the group exceeds . Once a client has been denied access to an AP in the group for a total of 10 attempts, it will be allowed to connect to that AP again upon the next attempt.

* Members

Cancel

OK

Table 5-3 Client load balancing configuration

Parameter	Description
Group Name	Enter the name of the AP load balancing group.
Type	Select Client Load Balancing .

Parameter	Description
Rule	Configure a detailed load balancing rule, including the maximum number of clients allowed to associate with an AP, the difference between the currently associated client count and client count on the AP with the lightest load, and the number of attempts to the AP with full load. By default, when an AP is associated with 3 clients and the difference between the currently associated client count and client count on the AP with the lightest load reaches 3, clients can associate only to another AP in the group. After a client association is denied by an AP for 10 times, the client will be allowed to associate to the AP upon the next attempt.
Members	Specify the APs to be added to the AP load balancing group.

5.6.3 Configuring Traffic Load Balancing

Choose **Network-Wide > Workspace > Wireless > Load Balancing**.

Click **Add**. In the dialog box that appears, set **Type** to **Traffic Load Balancing**, and configure **Group Name**, **Members**, and **Rule**.

Add
×

* Group Name

* Type

Traffic Load Balancing

* Rule

Load balancing is triggered when the traffic on an AP in a group reaches *100Kbps, and the traffic difference between the AP and other APs in the group exceeds x 100Kbps. Once a client has been denied access to an AP in the group for a total of 10 attempts, it will be allowed to connect to that AP again upon the next attempt.

* Members

Enter an AP name or SN.

Cancel

OK

Table 5-4 Traffic load balancing configuration

Parameter	Description
Group Name	Enter the name of the AP load balancing group.
Type	Select Traffic Load Balancing .
Rule	Configure a detailed load balancing rule, including the maximum traffic allowed on an AP, the difference between the current traffic and the traffic on the AP with the lightest load, and the number of attempts to the AP with full load. By default, when the traffic load on an AP reaches 500 Kbit/s and the difference between the current traffic and the traffic on the AP with the lightest load reaches 500 Kbps, clients can associate only to another AP in the group. After a client association is denied by an AP for 10 times, the client will be allowed to associate to the AP upon the next attempt.
Members	Specify the APs to be added to the AP load balancing group.

5.7 Configuring Wireless Rate Limiting

5.7.1 Overview

The device supports four rate limiting modes: client-based rate limiting, SSID-based rate limiting, AP-based rate limiting, and packet-based rate limiting. For the same client, if multiple rate limiting modes are configured, the priority order is as follows: client-based rate limiting > SSID-based rate limiting > AP-based rate limiting.

- Client-based rate limiting: This function allows you to limit the rate based on the MAC address of the client, so as to limit or guarantee the bandwidth required by specific clients.
- SSID-based rate limiting: This function provides two rate limiting modes for a specified SSID: Rate Limit Per User and Rate Limit All Users. Rate Limit Per User means that all clients connected to the SSID use the same rate limit. Rate Limit All Users means that the configured rate limit value is evenly allocated to all clients connected to the SSID. The rate limit value of each client dynamically changes with the number of clients connected to the SSID.
- AP-based rate limiting: This function limits the client rates based on the whole network. All clients connected to the network will work according to the configured rate limit value.
- Packet-based rate limiting: This function limits the client rates based on the downlink broadcast and multicast packets. The device supports rate limiting for specific broadcast packets (such as ARP and DHCP), multicast packets (such as MDNS and SSDP), or all types of broadcast and multicast packets. If network stalling remains during network access and there is no client with large traffic, you are advised to adjust the rate between 1 Kbps and 512 Kbps.

5.7.2 Configuration Steps

1. Configuring Client-based Rate Limiting

Choose **Network-Wide** > **Workspace** > **Wireless** > **Rate Limiting** > **Client-based Rate Limiting**.

- (1) Enable Wireless Rate Limiting.
- (2) Click **Add**. In the dialog box that appears, set the MAC address and uplink and downlink rate limit values of the client, and click **OK**.

Wireless Rate Limiting ☒

Client-based Rate Limiting SSID-based Rate Limiting AP-based Rate Limiting Packet-based Rate Limiting

i The rate limiting mode based on wireless clients can limit or provide the bandwidth for specific clients.

Client-based Rate Limiting + Add Delete Selected

☐	Client MAC	Uplink Rate Limit	Downlink Rate Limit	Remarks	Action
No Data					

Up to 512 entries can be added. Total 0 < 1 > 10/page

Add

×

* Client MAC

Uplink Rate

Limit Current: Kbps. Range: 1-1700000 Kbps

Downlink Rate

Limit Current: Kbps. Range: 1-1700000 Kbps

Remarks

Cancel

OK

2. Configuring SSID-based Rate Limiting

Choose **Network-Wide** > **Workspace** > **Wireless** > **Rate Limiting** > **SSID-based Rate Limiting**.

- (1) Enable Wireless Rate Limiting.
- (2) Click **Edit** in the **Action** column of the target SSID. In the dialog box that appears, set the uplink and downlink rate limit modes and values, and click **OK**.

Wireless Rate Limiting ☒

Client-based Rate Limiting [SSID-based Rate Limiting](#) AP-based Rate Limiting Packet-based Rate Limiting

This function provides rate limit per user and dynamic rate limiting for a specified SSID. Rate Limit per User indicates that all clients connected to the SSID use the same rate limit. Rate Limit All Users indicates that all clients connected to the SSID share the rate limit in average. The priority of this function is lower than that of client-based rate limiting.

SSID-based Rate Limiting Device Group: Default [Are you sure you want to add a Wi-Fi? Click to go.](#)

SSID	Uplink Rate Limit	Downlink Rate Limit	Action
@Ruijie-m6649	No Limit	No Limit	Edit Disable
test	No Limit	No Limit	Edit Disable

Edit

✕

Uplink Rate Limit (?) ☒ Rate Limit Per User ☐ Rate Limit All UsersRate Limit No Limit by Default. R Kbps ▼

Current: Kbps. Range: 1-1700000 Kbps

Downlink Rate Limit (?) ☒ Rate Limit Per User ☐ Rate Limit All UsersRate Limit No Limit by Default. R Kbps ▼

Current: Kbps. Range: 1-1700000 Kbps

Cancel

OK

3. Configuring AP-based Rate Limiting

Choose **Network-Wide** > **Workspace** > **Wireless** > **Rate Limiting** > **AP-based Rate Limiting**.

- (1) Enable Wireless Rate Limiting.
- (2) Set the uplink and downlink rate limit modes to **Rate Limit Per User**, configure the rate limit values, and click **OK**.

Wireless Rate Limiting ☒

Client-based Rate Limiting

SSID-based Rate Limiting

AP-based Rate Limiting

Packet-based Rate Limiting

i This function provides client rate limiting based on the whole network. All devices connected to the network use the preset rate limiting value.
The priority of this function is lower than that of client-based rate limiting and SSID-based rate limit per user.

AP-based Rate Limiting

Uplink Rate Limit ? ☐ No Limit ☒ Rate Limit Per User

Kbps

Current: Kbps. Range: 1-1700000 Kbps

Downlink Rate Limit ☐ No Limit ☒ Rate Limit Per User

Kbps

Current: Kbps. Range: 1-1700000 Kbps

OK

4. Configuring Packet-based Rate Limiting

Choose **Network-Wide > Workspace > Wireless > Rate Limiting > Packet-based Rate Limiting**.

- (1) Enable Wireless Rate Limiting.
- (2) Select the specific type of packets for rate limiting, configure the rate limit value, and click **Save**.

Wireless Rate Limiting ☒

Client-based Rate Limiting

SSID-based Rate Limiting

AP-based Rate Limiting

Packet-based Rate Limiting

i This function allows users to limit the downlink rate for broadcast and multicast packets. If the internet access is still slow and unstable when no client needs large amounts of traffic, you are advised to set the rate ranging from 1 Kbps to 512 Kbps. Smaller rate brings better network improvement.
Tip: A lower rate limit brings better network improvement but may affect client services. A higher rate limit indicates poorer network improvement.

Packet-based Rate Limiting

Broadcast Rate Limiting ☐ Disable ☐ Limit All ☒ Limit Part

☐ ARP Packet
 ☐ DHCP Packet

Multicast Rate Limiting ☐ Disable ☐ Limit All ☒ Limit Part

☐ MDNS Packet
 ☐ SSDP Packet

* Rate Limit Kbps

Current: 0 Kbps. Range: 1-1700000 Kbps

Save

5.8 Wireless Network Optimization

5.8.1 One-Click Wireless Optimization

Select the optimization mode, the system automatically optimize the wireless network.

Caution

- WIO is supported only in the self-organizing network mode.
- The client may be offline during the optimization process. The configuration cannot be rolled back once optimization starts. Therefore, exercise caution when performing this operation.

Choose **Network-Wide > Workspace > WLAN Optimization > Network Optimization**.

(1) Select the optimization mode. Then, click **OK** to optimize the wireless network.



Wireless Intelligent Optimization

In a networking environment, WIO can help maximize wireless performance by optimizing your network.

Optimization

Optimization mode: ☒ Quick optimization ☐ Deep optimization

Estimated Time

180s Environment scan + 3 minute Optimization

Instructions

- Upgrade all APs to the latest version for optimal network optimization.
- WIO is not supported on APs without an IP address.
- WIO only supports 20 MHz, 40 MHz, and 80 MHz channel bandwidths at the moment.
- Please perform optimization after all APs in the target area are online.

OK

Table 5-5 Description of Tuning Mode

Parameter	Description
Quick tuning	In this mode, external interference and bandwidth are not considered. A quick optimization is performed to optimize channel, power, and management frame power.

Parameter	Description
Deep tuning	In this mode, external interference and bandwidth are considered. A deep optimization is performed to optimize channel, power, and management frame power. Click to expand Advanced Settings to configure the Scan Time, Roaming Sensitivity, Transmit Power, Channel Width and channels. ● Scan Time: Indicates the time for scanning channels during the optimization. ● Roaming Sensitivity: You can adjust the roaming sensitivity to balance the roaming performance and connection stability of the device during roaming. ● Transmit Power: You can adjust the transmit power of wireless devices to optimize the performance and coverage of the Wi-Fi network. ● 2.4G ○ Channel Width: Indicates the channel bandwidth. The channel bandwidth will be calculated by the system if Default is selected. ○ Selected channels: Indicates the channels to be optimized. ● 5G ○ Channel Width: Indicates the channel bandwidth. The channel bandwidth will be calculated by the system if Default is selected. ○ Selected channels: Indicates the channels to be optimized.

- (2) (Optional) When the **Optimization Mode** is configured as **Deep optimization**, expand the **Advanced Settings** to set the scan time, roaming sensitivity, transmit power, channel width and channels.

----- [Advanced Settings](#) -----

Scan time

Roaming ☒

Sensitivity

Transmit Power ☒

2.4G

Channel Width

* Selected channels

1 (2.412GHz) ✕

2 (2.417GHz) ✕

3 (2.422GHz) ✕

4 (2.427GHz) ✕

5 (2.432GHz) ✕

6 (2.437GHz) ✕

7 (2.442GHz) ✕

8 (2.447GHz) ✕

9 (2.452GHz) ✕

10 (2.457GHz) ✕

11 (2.462GHz) ✕

12 (2.467GHz) ✕

13 (2.472GHz) ✕

5G

Channel Width Default ▼

Selected channels

36 (5.180GHz) ✕

40 (5.200GHz) ✕

44 (5.220GHz) ✕

48 (5.240GHz) ✕

52 (5.260GHz) (Radar channel) ✕

56 (5.280GHz) (Radar channel) ✕

60 (5.300GHz) (Radar channel) ✕

64 (5.320GHz) (Radar channel) ✕

149 (5.745GHz) ✕

153 (5.765GHz) ✕

157 (5.785GHz) ✕

161 (5.805GHz) ✕

165 (5.825GHz) ✕

- (3) Confirm the tips, and Click **OK**.

Tips



During optimization, the APs may switch channels and collect data, which may result in temporary disconnection and affect user experience. This situation may last for some time. You are advised to enable scheduled optimization if you require an Internet connection for the time being.

Cancel

OK

- (4) After optimization starts, please wait patiently until optimization is complete. After optimization is complete, you can click **Cancel Optimization** to restore the radio parameters to the default values.

The **Channel Width**, **Channel**, and **Transmit Power** columns in the **Optimization Details** section show the changes in the bandwidth, channel, and transmit power of the AP before and after optimization.



Finish

Completion time: 2023-12-08 13:32:29

Optimization mode Quick optimization

Time consumed: 36 seconds. Optimized 1 APs, resolved severe interference of 0 APs, reduced channel interference by 0.00%, and improved user experience by 0.00%.

Cancel Optimization

Back to Home

Optimization Details

Enter AP name/SN

5G

2.4G

Hostname	Band	SN	Channel Width (Before/After)	Channel (Before/After)	Transmit Power (Before/After)	Sensitivity (Before/After)
Ruijie	5G		80	36	100	0

Total 1



1



10/page

- (5) Click **Optimization Record** Tab to view details of the latest optimization.

Optimization Details						
Enter AP name/SN 5G 2.4G						
Hostname	Band	SN	Channel Width (Before/After)	Channel (Before/After)	Transmit Power (Before/After)	Sensitivity (Before/After)
Ruijie	5G	G1SK9QF069621	80	36	100	0
Total 1 < 1 > 10/page						

5.8.2 Scheduled Wireless Optimization

You can configure scheduled optimization to optimize the network at the specified time. You are advised to set the scheduled optimization time to daybreak or the idle periods.

Caution

Clients may be kicked offline during optimization and the configuration cannot be rolled back after optimization starts. Exercise caution when performing this operation.

Choose **Network-Wide** > **Workspace** > **WLAN Optimization** > **Scheduled Optimization**.

 Optimize the network performance at a scheduled time for a better user experience.

Enable

☒

Day

Sun

▼

Time

02

▼

:

11

▼

Schedule

☒ Weekly

☐ One time

Optimization mode

☐ Quick optimization

☒ Deep optimization

Advanced Settings

Save

- (1) Configure the scheduled time.
- (2) Select the Optimization mode.
- (3) (Optional) When the **Optimization Mode** is configured as **Deep optimization**, expand the **Advanced Settings** to set the scan time, roaming sensitivity, transmit power, channel bandwidth and selected channels.

Scan time

10s

Roaming

☒

Sensitivity

Transmit Power

☒

2.4G

Channel Width

Default

*

Selected channels

1 (2.412GHz)

2 (2.417GHz)

3 (2.422GHz)

4 (2.427GHz)

5 (2.432GHz)

6 (2.437GHz)

7 (2.442GHz)

8 (2.447GHz)

9 (2.452GHz)

10 (2.457GHz)

11 (2.462GHz)

12 (2.467GHz)

13 (2.472GHz)

5G

Channel Width

Default

*

Selected channels

36 (5.180GHz)

40 (5.200GHz)

44 (5.220GHz)

48 (5.240GHz)

52 (5.260GHz) (Radar channel)

56 (5.280GHz) (Radar channel)

60 (5.300GHz) (Radar channel)

64 (5.320GHz) (Radar channel)

149 (5.745GHz)

153 (5.765GHz)

157 (5.785GHz)

161 (5.805GHz)

165 (5.825GHz)

Save

(4) Click **Save**.

5.8.3 Wi-Fi Roaming Optimization (802.11k/v)

Wi-Fi roaming is further optimized through the 802.11k/802.11v protocol. Smart endpoints compliant with IEEE 802.11k/v can switch association to the access points with better signal and faster speed, thereby ensuring high-speed wireless connectivity.

To ensure high quality of smart roaming service, the WLAN environment will be automatically scanned when Wi-Fi roaming optimization is first enabled.

Choose **Network-Wide > Workspace > WLAN Optimization > 802.11k/v Roaming Optimization**.

✓

Start

✓

Scanning

✓

Optimizing

✓

Finish

Description:

The Wi-Fi roaming is further optimized through the 802.11k/v protocol. Smart clients compliant with 802.11k/v can switch to the APs with better signal and faster speed during the roaming process, ensuring high-speed wireless connectivity.

To ensure smart roaming effect, the WLAN environment will be auto scanned when Wi-Fi roaming optimization is first enabled.

Notes:

During the WLAN environment scanning, the APs will switch channels, forcing the clients to go offline. The process will last for 2 minutes.

Optimization Mode ☒ Performance-prior ☐ Roaming-prior

Enable

Caution

During the optimization, the clients may be forced offline. Please proceed with caution.

Select **Optimization Mode** and click **Enable**, then the optimization starts.

✓

Start

✓

Scanning

✓

Optimizing

✓

Finish

Optimization is enabled.

Optimization finished on 2023-12-08 13:32:29
Time: 36 seconds
To ensure smart roaming effect, please [Click Here](#) to scan the WLAN environment again if the topology changes.

Disable

5.9 Reyee Mesh Settings

Specification

This feature is supported only in ReyeeOS version 2.320 and later. The following figure shows the configuration page for versions prior to ReyeeOS 2.320.

After Reyee Mesh is enabled, the devices that support Reyee Mesh can be paired through wireless or wired connection to set up a Mesh network. Auto link optimization is supported in the Mesh network.

Mesh link optimization algorithm: The algorithm not only covers signal strength, wireless mode, antenna streams and bandwidth parameters, but also considers the attenuation of Mesh hops. The Mesh system will select the optimal uplink automatically for the AP based on the link optimization algorithm.

Enable ☒


Save

Choose **Network-Wide > Workspace > Wireless > AP Mesh**.

After Reyee Mesh is enabled, you can set up a Mesh network through Mesh pairing between the devices that support Reyee Mesh. You can press the **Mesh** button on the device to automatically discover a new device for Mesh pairing or log in to the management page to select a new device for Mesh pairing. Reyee Mesh is enabled on the device by default.

Old Device Compatibility: If there are devices running software versions older than ReyeeOS 2.320 in the environment to form a Mesh network, you are advised to enable **Old Device Compatibility**. When this feature is enabled, devices with software versions prior to ReyeeOS 2.320 can join the mesh network through the fixed Mesh Wi-Fi network.

AP Mesh



When AP Mesh is enabled, Devices that support the AP Mesh function can form a network either wirelessly or through a wired connection. The system will automatically optimize mesh links by considering factors such as signal strength, wireless mode, number of antenna streams, channel width, and signal loss across mesh hops to choose the optimal uplink.

Mesh Networking ☒

Old Device Compatibility ☒

?

Mesh Devices List

[Configure Mesh Wi-Fi](#)
[Scan to Add Devices](#)

Username	Model	SN	IP/MAC	Uplink	Status	Connectivity Quality
AP	EG205GW	68	192.168.110.91 eC	-	Offline	-

Total 1 < 1 > 10/page

5.10 Configuring the LAN Port of Downlink Access Point

Caution

The configuration takes effect only for a downlink access point with a wired LAN port.

Choose **Network-Wide > Workspace > Wireless > LAN Ports**.

Enter the VLAN ID and click **Save** to configure the VLAN, to which the AP wired ports belong. If the VLAN ID is null, the wired ports and WAN interface belong to the same VLAN.

In self-organizing network mode, the AP wired port configuration applies to all APs having wired LAN ports on the current network. The configuration applied to APs in **LAN Port Settings** takes effect preferentially. Click **Add** to add the AP wired port configuration. For APs, to which no configuration is applied in **LAN Port Settings**, the default configuration of the AP wired ports will take effect on them.

This profile takes effect only on APs with wired LAN ports, and is subject to the actual device. For example, the AP wired port profile takes effect on the RG-EAP101 AP.

Note: This profile takes effect on APs on the AP Wired Port Profile List. The AP Wired Profile Default Profile takes effect on other APs on the network.

Default Settings

VLAN ID [Add VLAN](#)

(Range: 2-232, 234-4090. If this field is left blank, it indicates that the VLAN corresponding to the WAN port is used.)

Apply to ☐ APs not on the AP Wired Port Profile List

[Save](#)

LAN Port Settings

[+ Add](#)

[Delete Selected](#)

☐	VLAN ID	Apply to	Action
☐	20	Ruijie	Edit Delete

Up to 8 VLAN IDs or 32 APs can be added (1 APs have been added).

5.11 Configuring Domain Proxy

Choose **Network-Wide** > **Workspace** > **Wireless** > **Domain Proxy**.

When a client accesses a Wi-Fi network, the message "No Internet connection" or "The Wi-Fi is not connected to the Internet" may be displayed. The possible cause is that the client's operating system introduces an Internet detection mechanism. Generally, the detection mechanism sends a probe packet to a specified domain name and evaluates whether the wireless network can access the Internet based on the detection result. If the DNS server takes a long time to parse a domain name or returns a probe node with a long delay, the probe may be deemed unreachable, causing a false network unavailability.

After the **Domain Proxy** function is enabled, the device returns the preset domain name node to the client, reducing the misjudgment of network unavailability of the client.

Domain Proxy

Enable ☒

Click **+Add**, enter the preset domain name and IP address, and click **OK**.

User Configuration List

[+ Add](#)

[Delete Selected](#)

☐	Domain Name	IP	Action
No Data			

Up to 32 entries can be added.

Total 0 [<](#) [1](#) [>](#) [10/page](#)

Add

×

* Domain Name

* IP

Example: 1.1.1.1

Cancel

OK

5.12 Client Association

5.12.1 Configuring Intelligent Association

Choose **Network-Wide** > **Workspace** > **Wireless** > **Client Association**.

Note

Intelligent association is not supported by Wi-Fi 5 APs. Enabling it on Wi-Fi 5 APs may lead to suboptimal performance.

After certain smart home devices are associated with a remote AP, they are unable to re-associate with a nearby AP, resulting in poor user experience and significant delays.

With the Intelligent Association feature enabled, clients can dynamically select the access point for association, eliminating issues related to poor user experience caused by remote associations.

Toggle on the **Intelligent Association** switch, select the association mode, and click **Save**.

Intelligent Association

Intelligent Association 

Association Mode  **Signal First** RSSI Threshold
Associate with the AP with the best signal

 **Experience First**
Associate with the AP with the best wireless experience

 Save

- Signal First
Associate with the AP that broadcasts strongest signal.
- Experience First
Associate with the AP that delivers a better wireless experience.

5.12.2 Configuring Client Association

Choose **Network-Wide** > **Workspace** > **Wireless** > **Client Association**.

Client Association

Enter MAC

Delete Selected

+ Add Association

☐	Client	IP/MAC	Associated Device	Signal Strength	Action
☐	-	9c:xx:xx:xx:xx:xx	AP @Ruijie-m6649 5G	-42dBm Channel: 36	Edit Delete

Up to 128 entries can be added.

Total 1 **1** 10/page

Click **Add Association**. Select the client and the associated device. You can associate the client with a specified AP on the network to reduce remote association and improve the wireless experience.

Add Association



* Client

Enter the MAC address

* Associated Device

Select

----- [Advanced Settings](#) -----

Click **Advanced Settings** to configure the SSID for client association and to enable **Forced Association**.

----- [Advanced Settings](#) -----

SSID

Select

Forced Association



Enabling this feature will forcefully associate the client with a specific AP. However, since the client cannot initiate automatic association, this may cause disconnection and unsuccessful association attempts.

Caution

The **Forced Association** feature may cause the client to go offline or fail to associate with the AP. Therefore, exercise caution when performing this configuration.

6 Switch Management

6.1 Configuring RLDP

6.1.1 Overview

Rapid Link Detection Protocol (RLDP) is an Ethernet link fault detection protocol used to quickly detect link faults and downlink loop faults. RLDP can prevent network congestion and connection interruptions caused by loops. After a loop occurs, the port on the access switch involved in the loop will shut down automatically.


6.1.2 Configuration Steps

Choose **Network-Wide** > **Workspace** > **Wired** > **RLDP**.


(1) Click **Enable** to access the **RLDP Config** page.

RLDP


RLDP will avoid network congestion
and connection interruptions caused
by loops. After a loop occurs, the
port involved in the loop will be
automatically shut down.

Enable

(2) In the networking topology, you can select the access switches on which you want to enable RLDP in either recommended or custom mode. If you select the recommended mode, all access switches in the network are selected automatically. If you select the custom mode, you can manually select the desired access switches. Click **Deliver Config**. RLDP is enabled on the selected switches.

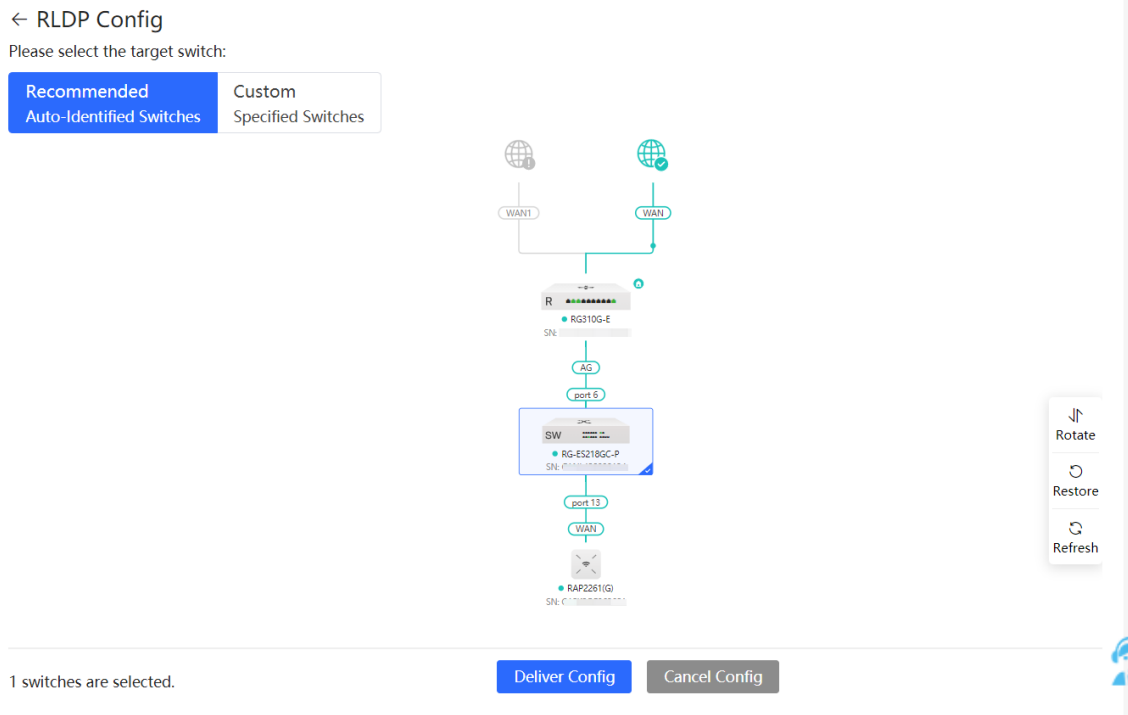

- (3) After the configuration is delivered, if you want to modify the effective range of the RLDP function, click **Configure** to select desired switches in the topology again. Turn off **RLDP** to disable RLDP on all the switches with one click.



6.2 Configuring DHCP Snooping

6.2.1 Overview

DHCP Snooping implements recording and monitoring the usage of client IP addresses through exchange of DHCP packets between the server and client. In addition, this function can filter invalid DHCP packets to ensure that clients can obtain network configuration parameters only from the DHCP server in the controlled range. DHCP Snooping will prevent rogue DHCP servers offering IP addresses to DHCP clients to ensure the stability of the network.

Caution

After DHCP Snooping is enabled on the switch, the switch does not forward invalid DHCP packets. However, if a client directly connects to a rogue DHCP server, it cannot access the Internet as the obtained IP address is incorrect. In this case, you need to find the rogue router and disable DHCP on it, or use the WAN interface for uplink connection.

6.2.2 Configuration Steps

Choose **Network-Wide > Workspace > Wired > DHCP Snooping**.

- (1) Click **Enable** to access the **DHCP Snooping Config** page.

DHCP Snooping

By enabling DHCP snooping, you can
effectively prevent certain devices
from receiving invalid IP addresses
from unauthorized routers, thereby
avoiding network connectivity failures.

This feature guarantees a stable and
continuous network connection.

Enable

- (2) In the networking topology, you can select the access switches on which you want to enable DHCP Snooping in either recommended or custom mode. If you select the recommended mode, all switches in the network are selected automatically. If you select the custom mode, you can manually select the desired switches. Click **Deliver Config**. DHCP Snooping is enabled on the selected switches.

← DHCP Snooping Config

Please select the target switch:

Recommended
All Switches


Custom
Specified Switches

1 switches are selected.

Deliver Config **Cancel Config**

Rotate
Restore
Refresh

- (3) After the configuration is delivered, if you want to modify the effective range of the DHCP Snooping function, click **Configure** to select desired switches in the topology again. Turn off **DHCP Snooping** to disable DHCP Snooping on all switches with one click.

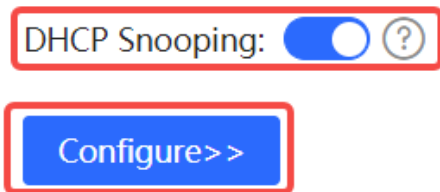

6.3 Batch Configuring Switches


6.3.1 Overview

You can batch create VLANs, configure port attributes, and divide port VLANs for switches in the network.


6.3.2 Configuration Steps

Choose **Network-Wide > Workspace > Wired > SW Config**.


- (1) The page displays all switches in the current network. Select the switches to configure, and then select the desired ports in the device port view that appears below. If there are a large number of devices in the current network, select a product model from the drop-down list box to filter the devices. After the desired devices and ports are selected, click **Next**.

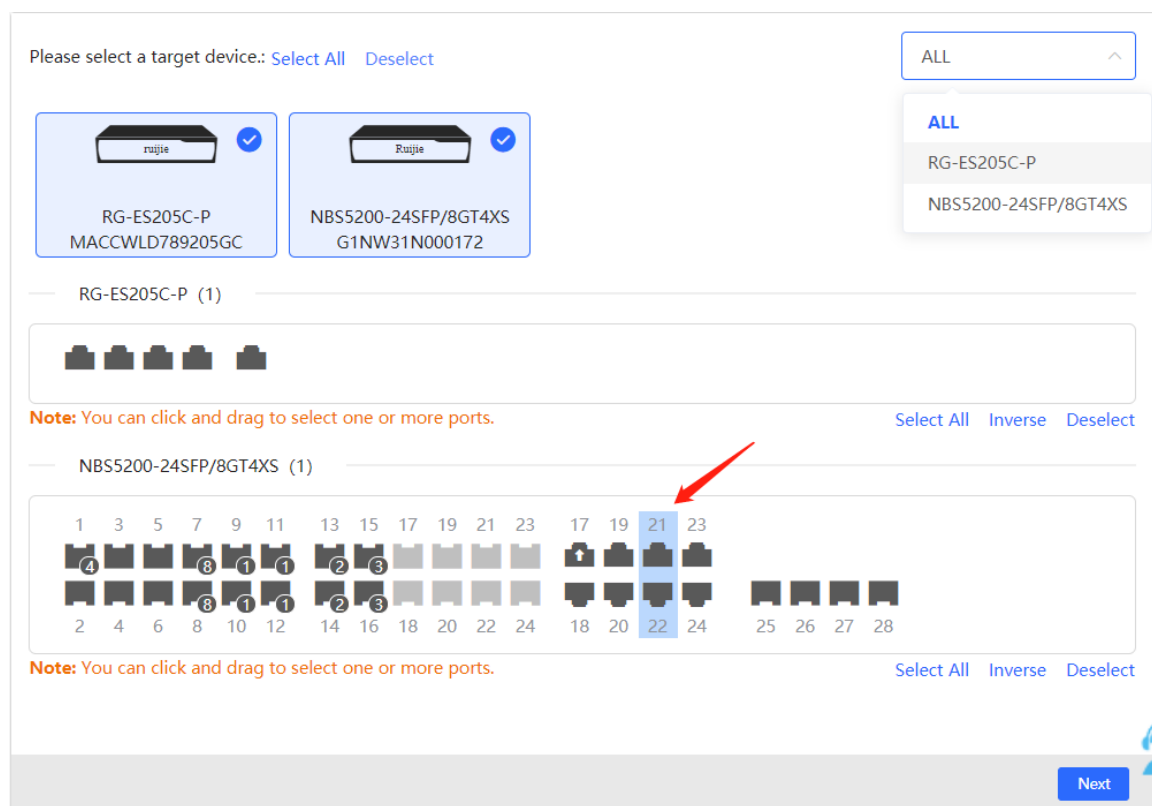

- (2) Click **Add VLAN** to create a VLAN for the selected devices in a batch. If you want to create multiple VLANs, click **Batch Add** and enter the VLAN ID range, such as 3-5,100. After setting the VLANs, click **Next**.

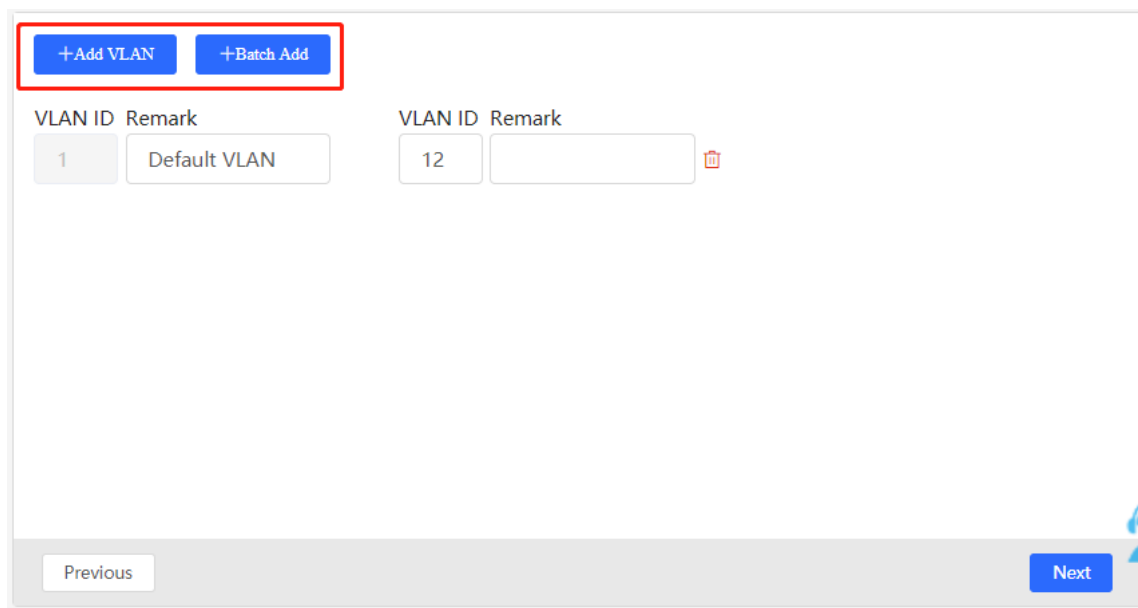

- (3) Configure port attributes for the ports selected in Step 1 in a batch. Select a port type. If you set **Type** to **Access Port**, you need to configure **VLAN ID**. If you set **Type** to **Trunk Port**, you need to configure **Native VLAN** and **Permitted VLAN**. After setting the port attributes, click **Override** to deliver the batch configurations to the target devices.

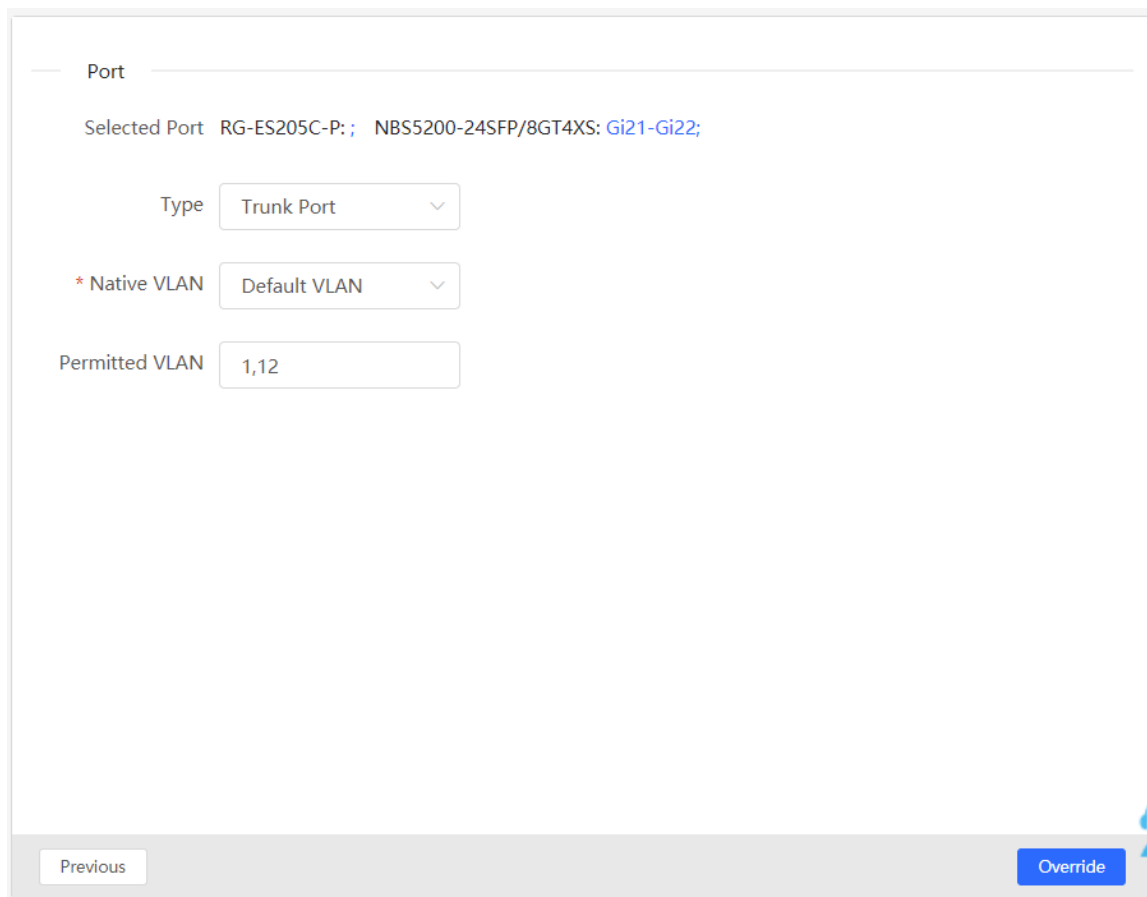

6.3.3 Verifying Configuration

View the VLAN and port information of switches to check whether the batch configurations are successfully delivered.



Hostname: [Ruijie](#)
Model: NBS5200-24SFP/8GT4XS
SN: G1NW31N000172

Software Ver: ReyeeOS 1.86.1619
MGMT IP: 10.44.78.1
MAC: 00:d3:f8:15:08:5b

Port Status

VLAN Info

Port

Route Info

RLDP

More

VLAN [Edit](#)

VLAN1

VLAN12

Interface	IP	IP Range	Remark
Gi17, Gi21-22, Te27			

1 3 5 7 9 11 13 15 17 19 21 23 17 19 21 23



2 4 6 8 10 12 14 16 18 20 22 24 18 20 22 24 25 26 27

Port [Edit](#)

7 Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

7.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Please enter a password.

Forgot Password

OK

- (2) The basic information, capacity, and security service license of the firewall are displayed on the Web management system.

Firewall Info

Firewall Port Config

Firewall Info

Hostname: RG-WALL

Model: Z5100-S

IP: 192.168.110.4

SN: 1234942571039

MAC: 00:00:18:91:ab:ab

Software Ver: NGFW_NTOS 1.0R3, Release(02211502)

Manage Firewall

License

Activated Licenses: 1.

Capacity

Available Capacity:3G (Default Capacity:3G+Licensed Capacity:0G)

Remaining Capacity:7G

How to obtain a license?

Security Service License

No.	Security Service Name	Description	License Type	Status
1	App Identification (APP)	Provide the upgrade of the firewall app identification library.	Official License	Activated Expiry Date: 2023-07-26
2	Intrusion Prevention System (IPS)	Provide the upgrade of the firewall IPS application library.	-	Not Activated
3	Anti-Virus(AV)	Provide the upgrade of the firewall AV library.	-	Not Activated

Click **Manage Firewall** to go to the Web management interface of the firewall. Configure the security policy and license activation for the firewall. For details, see the Web-based configuration guide of the firewall.

7.2 Configuring Firewall Port

If the firewall is set to transparent mode, the **Firewall Port Config** page appears. You can select the WAN interface connected to the gateway or the LAN port connected to the switch and enable **Security Guard**.

Firewall Info [Firewall Port Config](#)

Firewall Port Config

WAN Port: The port connected to the gateway. Connected Disconnected Unavailable

0	2	4	6	8F	0F	2F
1	3	5	7	9F	1F	3F

LAN Port: The port connected to the switch.

0	2	4	6	8F	0F	2F
1	3	5	7	9F	1F	3F

☒ [Enable Security Guard](#)
The security policy of the firewall between the LAN and the WAN is enabled by default.

[Save](#)

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

8 Authentication Management

8.1 Web Authentication

8.1.1 Overview

With the popularity of wireless networks, Wi-Fi has become one of the marketing means for merchants. Customers can connect to the Wi-Fi provided by the merchants to surf the Internet after watching advertisements. In addition, to defend against security vulnerabilities, the wireless office network usually allows only employees to associate with Wi-Fi, so the identity of the clients needs to be verified.

The Wi-Fi authentication function of the device uses the Portal authentication technology to implement information display and user management. After users connect to Wi-Fi, the traffic will not be directly routed to the Internet. Wi-Fi users must pass authentication on the Portal authentication website, and only authenticated users are allowed to use network resources. Merchants or enterprises can customize Portal pages for identity authentication and advertisement display.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

8.1.2 Getting Started

- (1) Before you enable Wi-Fi authentication, ensure that the wireless signal is stable and users can connect to Wi-Fi and surf the Internet normally. The wireless SSID used for authentication in the network should be set to the open state.
- (2) If the IP address of an AP in the network is within the authentication scope, add the AP as the authentication-free user. For details, see Section [8.1.8 Authentication-Free](#).
 - o In a Layer 2 network, add the MAC address of the AP to the authentication-free MAC address allowlist.
 - o In a Layer 3 network, add the IP address of the AP to the authentication-free IP address Allowlist.

8.1.3 WiFiDog Authentication

1. Overview

The EG device is connected to the MACC authentication server on the cloud. After Wi-Fi users connect to Wi-Fi, a Portal page pops up. The users need to enter the account and password to pass authentication before they can

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

access the Internet. According to the authentication configuration on the MACC authentication server, you can set the authentication mode to SMS authentication, fixed account authentication, or account-free one-click login.

2. Getting Started

- (1) Wi-FiDog is a Layer 2 protocol. Ensure that the authentication device can obtain the MAC addresses of the wireless users.
 - o The gateway address of the wireless users to be authenticated is deployed on the authentication device.
 - o If the gateway address is not deployed on the authentication device, the device functions as a DHCP server to allocate IP addresses to the wireless users and obtain MAC addresses of the wireless users. In this scenario, you need to set Network Type to Layer-3 Network.
- (2) Complete the corresponding configuration on the Ruijie Cloud platform before you enable the authentication function on the device. If SMS authentication is used, you also need to configure the SMS gateway.

3. Configuration Steps

Choose **One-Device > Gateway > Config > Authentication > Web Authentication > Cloud Auth**.

1 Configuration Guide

SD-WAN

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (1) Turn on **Authentication**.
- (2) Set **Server Type** to **Cloud Integration**, configure **Network Type**, **Auth Server URL**, **Client Escape** and **HTTPS Redirection**, and click **Save**.

Ruijie Cloud supports voucher authentication, local account authentication, SMS authentication and one-click authentication. Please log into Ruijie Cloud to enable authentication. [View](#)

 In a layer-2 network, if the IP address of the EAP device is in the authentication IP range, please add its MAC address to the MAC address allowlist of [Allowlist](#).
In a layer-3 network, if the IP address of the EAP device is in the authentication IP range, please add its IP address to the IP address allowlist of [Allowlist](#).

Authentication ☒

* Network Type

* Server Type 

* Auth Server URL

Client Escape  ☒ Enable

HTTPS Redirection  ☒ Enable

- (3) In the **Net List** area, click **Add**. In the displayed dialog box, enter the **VLAN** name and the **Auth IP / IP Range** to be authenticated and click **OK**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

* VLAN

* Auth IP / IP Range

Example: 1.1.1.1-1.1.1.100

Add



Cancel

OK

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 8-1 Description of WiFiDog Authentication Configuration

Parameter	Description
Network Type	The default value is Layer-2 Network . Set the parameter based on the actual network environment.
Server Type	Select Cloud Integration from the drop-down list.
Auth Server URL	After completing the configuration at the server end, the Ruijie Cloud authentication server returns a URL. The device sends authentication requests to the URL during authentication.
Client Escape	After the client escape function is enabled, if an exception occurs on the authentication server, the device disables authentication to allow all clients to directly access the Internet. After the server recovers, the device automatically enables authentication.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
HTTPS Redirection	Enabling HTTPS redirection ensures that user data transmission during the authentication process is encrypted, thereby enhancing the security of the authentication process. When HTTPS redirection is disabled, authentication requests can only be sent to HTTP pages.
VLAN	Specify the name of a Wi-Fi network, to which clients connect. A maximum of eight VLAN names can be configured.
Auth IP / IP Range	Specify the IP address range to be authenticated. You can enter a single IP address (such as 192.168.112.2) or an IP address range (such as 192.168.112.2–192.168.112.254). A maximum of five IP address ranges can be configured.

4. Verifying Configuration

After a mobile phone connects to a specific Wi-Fi, the Portal authentication page pops up automatically.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

If the authentication mode configured on the Ruijie Cloud authentication server is SMS authentication, the user needs to enter the mobile number to obtain an Internet access password and enter the password to complete authentication.

If the authentication mode configured on the Ruijie Cloud authentication server is account-free one-click authentication, the user can directly access the Internet after clicking the corresponding button on the page.

If the authentication mode configured on the Ruijie Cloud authentication server is fixed account login, the user can access the Internet after entering the account and password configured on the cloud.

After successful connection, you can choose **One-Device > Gateway > Config > Authentication > Online Clients** to view information about this authenticated user. For details, see Section [8.3 Online User Management](#).

8.1.4 Configuring Third-Party Authentication

1. Overview

Reyee EG series gateway devices can interwork with WISPr-compliant external authentication servers. After a wireless client is connected to the Wi-Fi network, a Portal page pops up. The wireless client needs to be

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

authenticated before it can access the Internet. Based on the services provided by different authentication servers, you can choose RADIUS authentication, local account authentication, or no authentication for third-party authentication.

2. Getting Started

- Ensure that the authentication server can obtain the MAC address of the wireless client:
 - The gateway address of the wireless client to be authenticated is deployed on the authentication server.
 - If the gateway address of the wireless client to be authenticated is not deployed on the authentication server, then the device must act as a DHCP server to assign an IP address to the wireless client in order to obtain its MAC address. In this scenario, the **Network Type** must be set to **Layer 3 Network**.
- Complete relevant configurations on the third-party authentication platform, and then enable the Wi-Fi authentication feature on the device. For specific configurations, see the configuration manual of relevant third-party authentication platforms.

3. Configuration Steps

Choose **One-Device** > **Gateway** > **Config** > **Authentication** > **Web Authentication** > **Cloud Auth**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Authentication ☒

* Network Type

* Server Type

[Customized Parameter](#)

* Auth Server URL

Client Escape ☒ [Enable](#)

HTTPS Redirection ☒ [Enable](#)

Authentication type ☒ RADIUS ☐ Local account ☐ None

To make the RADIUS flow control effective, please go to the Flow Control for configuration. [View](#)

RADIUS Encryption ☒ PAP ☐ CHAP ☐ MS-CHAP ☐ MS-CHAP-V2

Authentication server [Edit](#)

group

Accounting server [Edit](#)

group

Post Url

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (1) Toggle on **Authentication**.
- (2) Set **Server Type** to **Third-party Authentication**, configure **Network Type**, **Auth Server URL**, **Client Escape**, **HTTPS Redirection**, **Authentication Type**, **Auth Server Group** and **Accounting Server Group**, and click **Save**.

Table 8-2 Description of Third-Party Authentication Configuration Parameters

Parameter	Description
Network Type	The default value is Layer-2 Network . Set the parameter based on the actual network environment.
Server Type	Select Third-party authentication from the drop-down list.
Auth Server URL	After completing the configuration on the third-party authentication server, the third-party authentication server returns a URL. The device sends authentication requests to the URL during authentication.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Client Escape	After the client escape function is enabled, if an exception occurs on the authentication server or the RADIUS server, the device disables authentication to allow all clients to directly access the Internet. After the server recovers, the device automatically enables authentication.
HTTPS Redirection	Enabling HTTPS Redirection ensures that data is encrypted during user authentication, thus improving the security of the authentication process. When HTTPS Redirection is disabled, you will be redirected to HTTP pages only.
Authentication type	Types of third-party authentication, which include: ● RADIUS: The wireless client is authenticated by the RADIUS server. ● Local account: The wireless client is authenticated based on local username and password. ● None: No authentication is required for the wireless client.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
RADIUS Encryption	When Authentication Type is set to RADIUS, you need to configure the encryption mode for RADIUS authentication: ● RAP: This mode has low security. Passwords are transmitted in plain text, posing a risk of interception. ● CHAP: The server sends a random CHAP challenge to the client, and the client uses the password to calculate and returns a response. ● MS-CHAP: Functions such as password change and failed attempt count are supported. This mode is more secure and flexible than CHAP. ● MS-CHAPv2: As an improved version of MS-CHAP, this mode provides higher security and better encryption.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Authentication server group	Select a RADIUS authentication server group from the drop-down list box. This parameter is mandatory when the Authentication Type is set to RADIUS. You can click Edit next to the input box to create or modify a RADIUS authentication server group in the pop-up box. For details, see Section 13.6.3 Configuring the RADIUS Server.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Accounting server group	Select a RADIUS accounting server group from the drop-down list box. This parameter is mandatory when the Authentication Type is set to RADIUS. You can click Edit next to the input box to create or modify a RADIUS accounting server group in the pop-up box. For details, see Section 13.6.3 Configuring the RADIUS Server.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description												
	One-Device Gateway Network Wide Workspace Devices Clients System Search Network Security Behavior VPN Advanced Routing PPPoE Server Authentication Session Limit Port Mapping Dynamic DNS UPnP Gateway 2 MGMT IP: 10.51.227.57 MAC Address: 00:10:00:00:00:00 SN: 1000000000000000 Monitor Cloud Auth Local Account Auth Authorized Auth QR Code Auth HTTPS Redirection ☒ Enable Authentication type ☒ RADIUS ☐ Local account ☐ None To make the RADIUS flow control effective, please go RADIUS Encryption ☒ PAP ☐ CHAP ☐ MS-CHAP ☐ MS-CHAP Authentication server group smp Edit Accounting server group Select Edit Post URL https://www.ruijie.com Save Net List ☐ VLAN ☐ VLAN2 RADIUS Server Management Up to 20 entries can be added. <table><tr><th>Server Group Name</th><th>Server IP</th><th>Auth Port</th><th>Accounting Port</th><th>Shared Password</th><th>Action</th></tr><tr><td>smp</td><td>10.51.227.57</td><td>1812</td><td>1813</td><td>ruijie123</td><td> Edit Delete </td></tr></table> Server global configuration Packet Retransmission Interval 3 Packet Retransmission Count 3 Clear Server Detection ☐ MAC Address Format XXXXXXXXXX Save	Server Group Name	Server IP	Auth Port	Accounting Port	Shared Password	Action	smp	10.51.227.57	1812	1813	ruijie123	Edit Delete
Server Group Name	Server IP	Auth Port	Accounting Port	Shared Password	Action								
smp	10.51.227.57	1812	1813	ruijie123	Edit Delete								
Post URL	The URL to which the user will be redirected after authentication.												

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
VLAN	Specify the name of a Wi-Fi network, to which clients connect. A maximum of eight VLAN names can be configured.
Auth IP / IP Range	Specify the IP address range to be authenticated. You can enter a single IP address (such as 192.168.112.2) or an IP address range (such as 192.168.112.2–192.168.112.254). A maximum of five IP address ranges can be configured.

- (3) (Optional) Considering the different HTTP parameters and request methods required by different third-party authentication platforms. To configure custom third-party authentication parameters, you can click **Customized Parameter** next to **Server Type** and set **Parameter template** to **Custom**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Authentication ☒

* Network Type

* Server Type Customized Parameter ?

* Auth Server URL

Client Escape ☒ Enable

HTTPS Redirection ☒ Enable

Authentication type ☒ RADIUS ☐ Local account ☐ None

To make the RADIUS flow control effective, please go to the Flow Control for configuration. [View](#)

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Customized Parameter



Parameter template ☐ Ruijie ☐ Ruijie-CHAP ☒ Custom

Request Parameters

Request method ☒ get ☐ post

Parameter Type Key Val

Login Parameters

Name

Password

Post Url

Restore

OK

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 8-3 Description of Custom Third-Party Authentication Parameters

Parameter	Description
Parameter template	The built-in parameter template. Default parameters are used when the Parameter Template is set to Ruijie or Ruijie-CHAP . When the Parameter Template is set to Custom , the parameters can be customized.
Request method	The HTTP request methods used for requesting the portal page.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Parameters in the parameter template for requesting the portal page: - When the parameter type is not other, the Val field is invalid, and the default value NULL can be used. The Reyee EG gateway device will automatically populate the value of this parameter. - When the parameter type is other, you need to enter a value in the Val field. Parameters include: - nas_ip: IP address of the Reyee EG series gateway device. Example: 10.52.48.7. - nas_mac: MAC address of the Reyee EG series gateway device. Example: 11:22:33:44:55:66. - client_ip: IP address of the wireless client to be authenticated. Example: 192.168.110.5. - client_mac: MAC address of the wireless client to be authenticated. Example: 11:22:33:44:55:66. - orig_url: Original URL accessed by the wireless client to be authenticated. Example: https://www.baidu.com. - login_url: Login interface received by the Reyee EG series gateway device from the third-party authentication platform. Example: http://192.168.110.1:2060/ext_login.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
	● <code>logout_url</code>: Logout interface received by the Reyee EG series gateway device from the third-party authentication platform. Example: <code>http://192.168.110.1:2060/ext_logout</code>. ● <code>ssid</code>: SSID or VLAN name associated with the wireless client to be authenticated. Example: <code>VLAN233</code>. ● <code>sn</code>: SN of the gateway. ● <code>identity</code>: ID of the gateway. ● <code>chap_id</code>: Identifier or session ID stored during CHAP authentication. ● <code>chap_challenge</code>: The challenge string used in the CHAP authentication process. ● <code>interface_name</code>: Name of the interface through which the wireless client accesses the network. ● <code>login_host</code>: IP address of the login interface on the Reyee EG series gateway device. Example: <code>192.168.110.1:2060</code>. ● <code>other</code>: other custom field. Multiple custom fields are supported.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Login Parameters	Custom fields of the login interface received by the Reyee EG series gateway devices from the third-party authentication platform, including: ● Name: username. ● Password: password. ● Post Url: URL to which the wireless client is redirected after successful authentication.

- (4) In the **Net List** area, click **Add**. In the displayed dialog box, enter the **VLAN** name and the **Auth IP / IP Range** to be authenticated and click **OK**.

Net List

+ Add

Delete Selected

VLAN	Auth IP / IP Range	Action
No Data		

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

* VLAN

* Auth IP / IP Range

Example: 1.1.1.1-1.1.1.100

Add

?

Cancel

OK

4. Verifying Configuration

Connect your smartphone to the specific Wi-Fi network to verify that the portal page pops up automatically.

Connect to different authentication platforms to view services provided by these authentication platforms.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

After successful connection, you can choose **One-Device > Gateway > Config > Authentication > Online Clients** to view information about this authenticated user. For details, see Section [8.3 Online User Management](#).

8.1.5 Local Account Authentication

1. Overview

The device is connected to the local authentication server, and user identity is verified based on the account and password. Local account authentication is applicable to the wireless office network environment.

2. Getting Started

Ensure that the device with the authentication function enabled has been connected to the Internet. Otherwise, the authentication page does not pop up when a client associates with Wi-Fi.

3. Configuration Steps

Choose **One-Device > Gateway > Config > Authentication > Web Authentication > Local Account Auth**.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (1) Enable account authentication.

Turn on **Local Account Auth**, enter the IP address range of clients to be authenticated, and click **Save**. After account authentication is enabled, clients in the specified IP address range can access the Internet only after passing authentication.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Local Account Auth ☒

Auth Integration with ☒
Cloud

Accounts 0

* Network Type

Layer-2 Network

Auth IP / IP Range

Example: 1.1.1.1-1.1.1.100

Add

Default Portal

Seamless Online Period

Custom

* Custom Time

365

days

HTTPS Redirection ☒ Enable

Expiration Reminder ☐

A reminder portal page will appear when a user's account is nearing expiration. The user can continue browsing only after confirmation.

* Authentication type ☐ RADIUS ☒ Local account

Save

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 8-4 Description of Local Account Authentication Configuration Parameters

Parameter	Description
Auth Integration with Cloud	Use the authentication service integrated in Ruijie Cloud.
Accounts	The number of created authentication accounts.
Network Type	The default value is Layer-2 Network . Set the parameter based on the actual network environment.
Auth IP / IP Range	Specify the IP address range to be authenticated. You can enter a single IP address (such as 192.168.112.2) or an IP address range (such as 192.168.112.2–192.168.112.254). A maximum of five IP address ranges can be configured. After setting the IP address or IP address range, select the portal page for this IP address or IP address range from the drop-down list box on the right. For details about the configuration of the portal page, see Section 8.1.9 Custom Portal Page .

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Seamless Online Period	Set the validity period of seamless authentication. After a user is authenticated successfully for the first time, the user will be automatically authenticated when connecting to the Wi-Fi network within the validity period.
HTTPS Redirection	Enabling HTTPS Redirection ensures that data is encrypted during user authentication, thus improving the security of the authentication process. When HTTPS Redirection is disabled, you will be redirected to HTTP pages only.
Expiration Reminder	When an account is about to expire, a reminder portal page will appear. The user can continue to access the Internet only after confirmation.
Authentication type	Types of local account authentication, which include: ● RADIUS: The wireless client is authenticated by the RADIUS server. ● Local account: The wireless client is authenticated based on local username and password.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
RADIUS Encryption	When Authentication Type is set to RADIUS, you need to configure the encryption mode for RADIUS authentication: ● RAP: This mode has low security. Passwords are transmitted in plain text, posing a risk of interception. ● CHAP: The server sends a random CHAP challenge to the client, and the client uses the password to calculate and returns a response. ● MS-CHAP: Functions such as password change and failed attempt count are supported. This mode is more secure and flexible than CHAP. ● MS-CHAP-V2: As an improved version of MS-CHAP, this mode provides higher security and better encryption.
Authentication server group	Select a RADIUS authentication server group from the drop-down list box. This parameter is mandatory when the Authentication Type is set to RADIUS. You can click Edit next to the input box to create or modify a RADIUS authentication server group in the pop-up box. For details, see Section 13.6.3 Configuring the RADIUS Server.

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

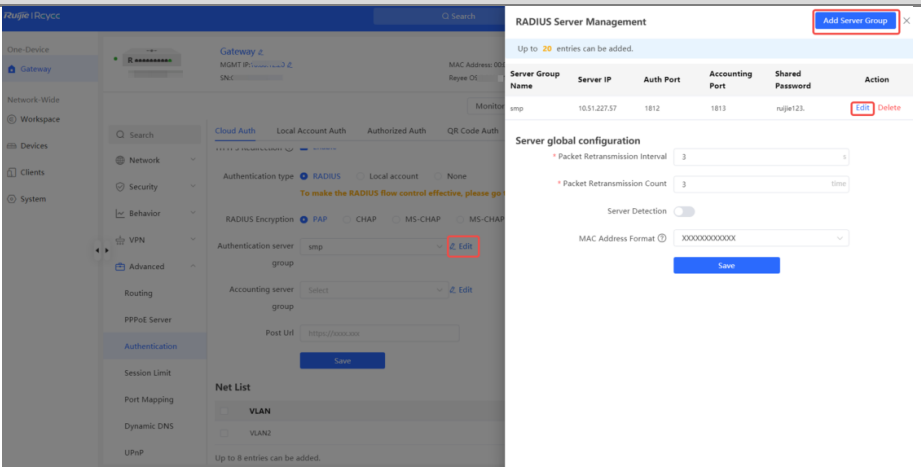Parameter	Description
	
Authentication server group	Select a RADIUS accounting server group from the drop-down list box. This parameter is mandatory when the Authentication Type is set to RADIUS .

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

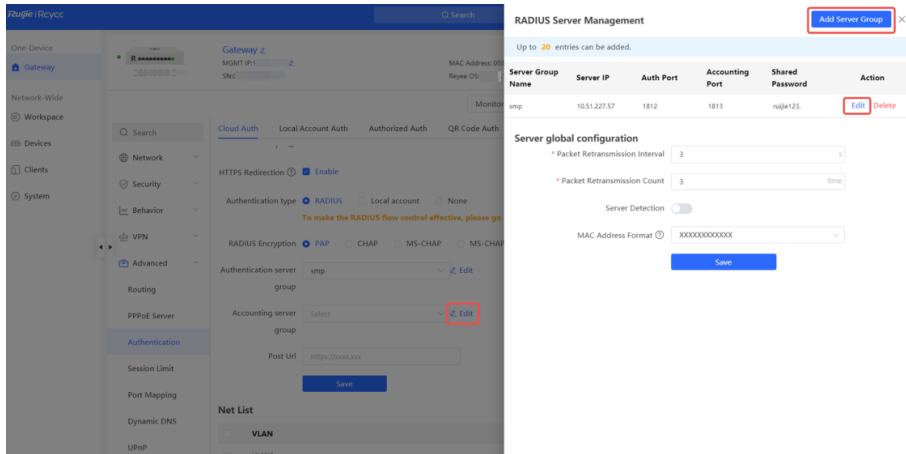Parameter	Description
	You can click Edit next to the input box to create or modify a RADIUS accounting server group in the pop-up box. For details, see Section 13.6.3 Configuring the RADIUS Server. 

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (2) Configure local user groups.

Choose **One-Device > Gateway > Config > Authentication > Account > User Groups**.

Configuring local user groups can limit the network segment for user authentication and Internet access rate. For example, on a campus network, you can configure different local user groups for teachers and students, which limits network segments for their authentication and isolates users.

Click the **Local User Groups** tab and click **Add** to set parameters. After the configuration is complete, the user group can be associated with a local authentication account.

Cloud User Group Local User Groups PPPoE User Groups

Search by User Group Name + Add Delete Selected

☐	User Group Name	IP Range	Concurrent Devices	Remarks	Rate Limiting	Bind MAC on first use	Client Disconnect	Action
☐	Default user group	No Limit	No Limit		↑ No Limit ↓ No Limit	Disable	Disable	Edit Delete

Up to 10 entries can be added.

Total 1

< 1 >

 10/page

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

IP Range ?

Example: 1.1.1.1-1.1.1.100

Add

Concurrent Devices

☒ No Limit

☐ Custom

Remarks

Maximum Uplink Rate

☒ No Limit

☐ Custom

Maximum Downlink Rate

☒ No Limit

☐ Custom

Bind MAC on first use

☐

Client Disconnect ?

☐

Cancel

OK

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 8-5 Configuration of Local User Groups

Parameter	Description
User Group Name	Specify the name of a user group. You can associate a local user group based on the name when configuring a local authentication account.
IP Range	Specify the IP address segment used to limit the local account authentication. An account associated with a user group can pass Internet access authentication only when the account initiates an authentication request from the corresponding network segment. Multiple associated network segments can be configured.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Concurrent Devices	Multiple clients can access the Internet using the same username and password. You can set the parameter to limit the maximum number of clients that can access the Internet using the account associated with a user group. You can set Concurrent Devices to Custom and enter the maximum number of allowed online clients.  Caution If this parameter is also configured for an authentication account, the configuration takes effect preferentially.
Remarks	Enter the user group description.
Maximum Uplink/Downlink Rate	Configure the uplink and downlink bandwidth limits for users associated with the user group.
Bind MAC on first use	After this parameter is toggled on and a client logs in for the first time, the local authentication server records the MAC address of the client.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Client Disconnection	When the number of online clients using an account associated with a user group exceeds the configured Concurrent Devices, new clients cannot be onboarded. After the parameter is toggled on, new clients can choose to disconnect other clients, thereby gaining access to the Internet. You are advised not to toggle on the parameter when Bind MAC on first use is toggled on. Otherwise, the bound MAC address may become invalid.

- (3) Configure an authentication account.

Choose **One-Device > Gateway > Config > Authentication > Account > Accounts**.

Click the **Local Authentication Accounts** tab, and click **Add** to create a local account for web-based authentication. Set **Username** and **Password**. Multiple devices can access the Internet using the same username and password. You can set **Concurrent Users** to configure the maximum number of users who

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

can access the Internet using the same account. To limit the network segment or bandwidth for user login, you can set **Plan** to a user group.

Cloud Accounts Cloud Voucher **Local Authentication Accounts** PPPoE Accounts

Search by Username Refresh **+ Add** Delete Selected

☐	Username	Password	User Group Name	Concurrent Devices	MAC Address ⓘ	Action
No Data						

Up to 350 accounts can be added.

Total 0 < 1 > 10/page

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add Account



* Username

* Password

Concurrent Devices



Plan

Cancel

OK

Click **Cloud Accounts** or **Cloud Voucher** to view the account and voucher information synchronized from Ruijie Cloud.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Cloud Accounts Cloud Voucher Local Authentication Accounts PPPoE Accounts

Search by Username Refresh

User Group Name	Username	Password	Concurrent Devices	MAC Address
No Data				

Up to 350 accounts can be added.

Total 0 1 10/page

- (4) Disconnect an online user.

When the number of concurrent users in a single account exceeds the limit, a prompt will appear when a new user attempts to connect. You can then choose to disconnect a specific user by clicking the Kick off button. After re-logging in, the user can access the network.

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

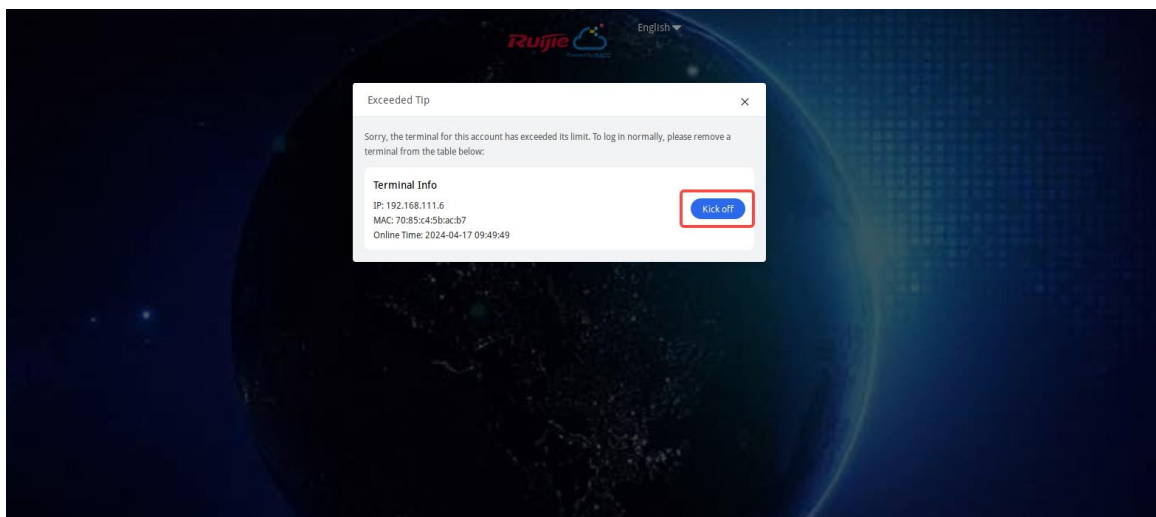

4. Verifying Configuration

After a client connects to the specific Wi-Fi, the authentication page pops up automatically. The user can normally access the Internet only after entering the account and password configured on the local server on the

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

authentication page. You can choose **One-Device > Gateway > Config > Advanced > Authentication > Online Clients** to view information about the successfully connected user. For details, see Section [8.3 Online User Management](#).

8.1.6 Authorized Guest Authentication

1. Overview

The device is connected to the local authentication server. After a guest connects to Wi-Fi, the guest can access the Internet after the specified authorization IP user or account and password authentication user scans the QR code that pops up for guest authentication. For example, in the wireless office network, users in the employee network segment are authorized to scan the guest authentication QR code for users in the guest network segment.

2. Getting Started

Ensure that the device with the authentication function enabled has been connected to the Internet. Otherwise, the authentication page does not pop up when a client associates with Wi-Fi.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

3. Configuration Steps

Choose **One-Device > Gateway > Config > Authentication > Web Authentication > Authorized Auth**.

Turn on **Authorized Auth**, configure **Popup Message**, **Auth IP / IP Range**, **Authorization IP/IP Range**, **Limit Online Duration**, **HTTPS Redirection**, and click **Save**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Authorized Auth ☒

Popup Message ?

* Auth IP / IP Range ?

Example: 1.1.1.1-1.1.1.100

Add

Limit Online Duration

☐

* Authorization IP/IP
Range ?

Example: 1.1.1.1-1.1.1.100

HTTPS Redirection ? ☒ Enable

Save

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 8-6 Authorized guest authentication configuration

Parameter	Description
Popup Message	Specify the text to be displayed on the pop-up QR code page.
Auth IP / IP Range	Specify the IP address range for users to be authenticated. The value can be a single IP address (such as 192.168.110.2) or an IP address range (such as 192.168.110.2-192.168.110.254). Users in the specified IP address range can access the Internet only after passing authentication.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Limit Online Duration	Specify whether to limit the online duration of guests. After you enable this function, you need to configure Duration Limit . If the online duration of a guest exceeds the specified value, the guest can continue Internet access only after re-authorization. By default, this function is disabled, indicating that guests can use Wi-Fi without limit on the online duration.
Duration Limit	Specify the maximum online duration of authorized guests. If the online duration of an authorized guest exceeds the specified value, the guest goes offline automatically and needs to be re-authorized for login again.
Authorization IP/IP Range	Specify the IP address range of authorization users. Users in this range can scan the QR code to authorize guests.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
HTTPS Redirection	Enabling HTTPS redirection ensures that user data transmission during the authentication process is encrypted, thereby enhancing the security of the authentication process. When HTTPS redirection is disabled, authentication requests can only be sent to HTTP pages.

4. Verifying Configuration

After a guest connects to Wi-Fi, the QR code authentication page pops up. The guest can access the Internet after the specified authorization user scans this QR code. You can choose **One-Device > Gateway > Config > Authentication > Online Clients** to view information about this authenticated user. For details, see Section [8.3 Online User Management](#).

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

8.1.7 Guest Authentication through QR Code Scanning

1. Overview

Guests scan the specified QR code to access the Internet. For example, in the wireless office network, guests scan the pasted QR code to access the Internet after they connect to Wi-Fi.

2. Getting Started

Ensure that the device with the authentication function enabled has been connected to the Internet. Otherwise, the authentication page does not pop up when a client associates with Wi-Fi.

3. Configuration Steps

Choose **One-Device > Gateway > Config > Authentication > Web Authentication > QR Code Auth**.

Turn on **QR Code Auth**, configure **Auth IP / IP Range**, **Limit Online Duration**, and **QR Code Generator**, and click **Save**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

QR Code Auth ☒

* Auth IP / IP Range ?

Example: 1.1.1.1-1.1.1.100

Add

Limit Online Duration ☐

QR Code Generator

* Dynamic QR Code ?

defqrcode

Popup Message

?



Please print and paste the QR code for guests to scan.

Save

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 8-7 Guest authentication through QR code scanning configuration

Parameter	Description
Auth IP / IP Range	Specify the IP address range for users to be authenticated. The value can be a single IP address (such as 192.168.110.2) or an IP address range (such as 192.168.110.2-192.168.110.254). Users in the specified IP address range can access the Internet only after passing authentication.
Limit Online Duration	Specify whether to limit the online duration of guests. After you enable this function, you need to configure Duration Limit . If the online duration of a guest exceeds the specified value, the guest needs to scan the QR code again before continuing Internet access. By default, this function is disabled, indicating that guests can use Wi-Fi without limit on the online duration.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Duration Limit	Specify the maximum online duration of authorized guests. If the online duration of an authorized guest exceeds the specified value, the guest goes offline automatically and needs to be re-authenticated.
Dynamic QR Code	The dynamic QR code is used to generate a QR code image. After the dynamic QR code is updated, the QR code image changes and the previous image becomes invalid. You can print and paste the generated QR code image, which can be scanned by guests to access the Internet.
Popup Message	Specify the QR code prompt message displayed on the page after a guest scans the QR code.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

4. Verifying Configuration

After a client connects to Wi-Fi, the guest can scan the QR code to pass authentication and access the Internet. You can choose **One-Device > Gateway > Config > Authentication > Online Clients** to view information about the successfully connected user. For details, see Section [8.3 Online User Management](#).

8.1.8 Authentication-Free

1. Overview

After IP addresses or MAC addresses are configured for authentication-free users, they can directly access the Internet without passing authentication. Traffic from all the users in the blocklist is blocked.

2. Configuring an Authentication-Free Intranet User

Choose **One-Device > Gateway > Config > Authentication > Web Authentication > Allowlist**.

Intranet User Allowlist: Users in the specified IP address range can directly access the Internet without passing authentication.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Click **Add** to configure the IP address range for authentication-free users. The value can be a single IP address (such as 192.168.110.2) or an IP address range (such as 192.168.110.2-192.168.110.254). A maximum of 50 entries are supported.

Intranet User Allowlist

+ Add

Delete Selected

☐	IP / IP Range	Action
No Data		

Up to 50 entries can be added.

Total 0 < 1 > 10/page

Add



* IP / IP Range

Example: 1.1.1.1-1.1.1.100

Cancel

OK

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

3. Configuring Destination IP Addresses for Authentication-Free

Choose **One-Device** > **Gateway** > **Config** > **Authentication** > **Web Authentication** > **Allowlist**.

Destination IP Allowlist: Specify the IP addresses that can be assessed by all users including unauthenticated users.

Click **Add** to configure extranet IP addresses that can be assessed by users without authentication. A maximum of 50 entries are supported.

Destination IP Allowlist

+ Add

Delete Selected



IP / IP Range

Action

No Data

Up to 50 entries can be added.

Total 0



1



10/page

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

* IP / IP Range

Example: 1.1.1.1-1.1.1.100

Cancel

OK

4. Configuring a Domain Allowlist

Choose **One-Device > Gateway > Config > Advanced > Authentication > Allowlist > Domain Allowlist**.

Domain Allowlist: Specify the URLs that can be accessed without authentication.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Click **Add**. In the dialog box that appears, enter the authentication-free URLs, and then click OK. When the destination URL of the user is in the **Domain Allowlist** traffic from the user will be permitted directly, regardless of whether the user passes authentication. A maximum of 100 entries are supported.

Domain Allowlist

[+ Add](#)[Delete Selected](#)

☐	URL	Action
☐	ruijienetworks.com	Edit Delete

Up to 100 entries can be added.

Total 1

<

1

>

10/page

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

* URL

Cancel

OK

5. Configuring a User MAC Allowlist

Choose **One-Device > Gateway > Config > Advanced > Authentication > Allowlist > MAC Allowlist**.

MAC Allowlist: Clients whose MAC addresses are in the **Allowlist** can access the Internet through Wi-Fi without the need for authentication.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Click **Add**. In the dialog box that appears, enter the MAC addresses of authentication-free users, and then click **OK**. A maximum of 250 entries are supported.

MAC Allowlist

+ Add

Delete Selected

☐	MAC Address	Action
☐		Edit Delete

Up to 250 entries can be added.

Total 1 < 1 > 10/page

Add

×

* MAC Address

Example: 00:11:22:33:44:55

Cancel

OK

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

6. Configuring a User MAC Blocklist

Choose **One-Device > Gateway > Config > Advanced > Authentication > Allowlist > MAC Blocklist**.

User MAC Blocklist Clients whose MAC addresses are in the blocklist are prohibited from accessing the Internet.

Click **Add**. In the dialog box that appears, enter the MAC addresses of users in the blocklist, and then click **OK**.

A maximum of 250 entries are supported.

MAC Blocklist

[+ Add](#)[Delete Selected](#)

☐	MAC Address	Action
☐		Edit Delete

Up to 250 entries can be added.

Total 1

< 1 >

10/page

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add



* MAC Address

Example: 00:11:22:33:44:55

Cancel

OK

8.1.9 Custom Portal Page

Choose **One-Device > Gateway > Config > Authentication > Web Authentication > Customized Portal**.

1. Customized Portal

- (1) On the **Customized Portal** page, click **Add**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Customized Portal

+ Add

Up to 5 entries can be added.

ID	Name	Action
0	Default Portal	Edit Delete
1	portal_1	Edit Delete
11	portal_3	Edit Delete

Total 3

<1>

10/page

- (2) Enter the portal page name and customize its content. The preview page will update in real-time as you enter the values.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

* Name

Login Options ☒ Account

Post Url

Logo Image

Background ☒ Background Image ☐ Solid Color

Background Image

Languages

Welcome Message

Marketing Message

Terms & Conditions


Copyright

title

Account Placeholder

Password Placeholder

Login Button

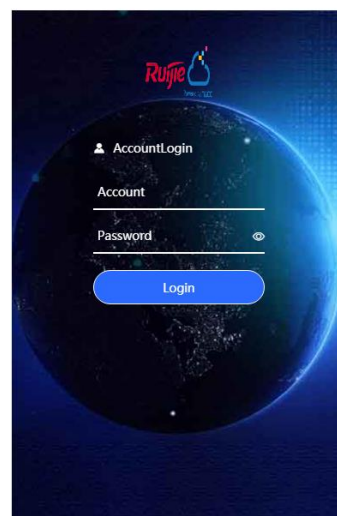

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (3) Click **OK**.

2. Cloud Portal

In the **Cloud Portal** pane, the portal page configured in Ruijie Cloud is displayed. Click **View** to preview the page content.

Cloud Portal

ID	Name	Action
2	zyh	View

Total 1 < 1 > 10/page

8.1.10 Global Configuration

Choose **One-Device > Gateway > Config > Authentication > Web Authentication > Global Config**.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

1. Authentication Configuration

You can configure the timeout period for an idle client. The default value is 15 minutes. If no traffic from an online user passes through the device within the specified period, the device will log out the user. The user can continue Internet access only after re-authentication.

You can set **Personal Status Page** to a domain name and **Protocol** to **http** or **https**. When a user accesses the domain name, you can view the online client information using the current account, including the IP address, MAC address, and uplink and downlink traffic of the client.

Auth Settings

* Idle Client Timeout: Min (Range: 5-65535)

Personal Status Page: ⓘ Accessing will automatically redirect the user to the personal status page.

Protocol: ⓘ ☒ http ☐ https

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

2. Account Expiration Reminder Settings

If a web-based authentication account is associated with a user group, you can configure the expiration reminder. The system will remind the user of renewal when the account is about to expire.

Account Expiration Reminder

* Reminder Time: Remind the user days before expiration

* Repeat Reminder Interval: Every hours

Save

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

8.2 Configuring the PPPoE Server

8.2.1 Overview

Point-to-Point Protocol over Ethernet (PPPoE) is a network tunneling protocol that encapsulates PPP frames inside Ethernet frames. When the router functions as a PPPoE server, it provides the access service to LAN users and supports bandwidth management.

8.2.2 Global Settings

Choose **One-Device > Gateway > Config > Authentication > PPPoE Server > Global Settings**.

Set **PPPoE Server** to **Enable** and configure PPPoE server parameters.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

PPPoE Server ⓘ

☐ Enable

☒ Disabled

Mandatory PPPoE Dialup ⓘ

☐ Enable

☒ Disable

* Local Tunnel IP ⓘ

* IP Range ⓘ

VLAN ⓘ

Primary DNS Server ⓘ

Secondary DNS Server ⓘ

* Unanswered LCP Packet Limit ⓘ

Range: 1-60

Auth Mode ⓘ

☒ PAP

☒ CHAP

☒ MSCHAP

☒ MSCHAP2

Expiration Reminder ⓘ

☐

A reminder portal page will appear when a user's account is nearing expiration. The user can continue browsing only after confirmation.

Save

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 8-8 PPPoE server configuration

Parameter	Description
PPPoE Server	Specify whether to enable the PPPoE server function.
Mandatory PPPoE Dialup	Specify whether LAN users must access the Internet through dialing.
Local Tunnel IP	Set the point-to-point address of the PPPoE server.
IP Range	Specify the IP address range that can be allocated by the PPPoE server to authenticated users.
VLAN	Set the VLAN of the current PPPoE server.
Primary/Secondary DNS Server	Specify the DNS server address delivered to authenticated users.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Unanswered LCP Packet Limit	When the number of LCP packets not answered in one link exceeds the specified value, the PPPoE server automatically disconnects the link.
Auth Mode	Select at least one authentication mode from the following: PAP, CHAP, MSCHAP, and MSCHAP2.
Expiration Reminder	When an account is about to expire, a reminder portal page will appear. The user can continue to access the Internet only after confirmation.

8.2.3 Configuring the PPPoE User Groups

Choose **One-Device > Gateway > Config > Authentication > Account > User Groups**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

If smart flow control is disabled, the configuration of the PPPoE user groups does not take effect. Before you configure a PPPoE user group, enable smart flow control first. For details on how to set smart flow control, see [Section 9.6.2 Smart QoS](#).

Click the **PPPoE User Groups** tab and click **Add** to create a PPPoE user group. The currently created user groups for flow control are displayed in the user group list. You can modify or delete the user groups.

1 Configuration Guide

SD-WAN



Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

* User Group Name

Uplink Bandwidth

* Limit-at

Mbps

Mbps

* Max-Limit

Mbps

Mbps

?

Downlink Bandwidth

* Limit-at

Mbps

Mbps

* Max-Limit

Mbps

Mbps

?

Max-Limit per User

Uplink

No Limit by

Mbps

Downlink

No Limit by

Mbps

Bandwidth

Bandwidth

Apply To

?

☒ Designated interfaces

☐ ALL Interface

* Interface

Each-WAN

Cancel

OK

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 8-9 PPPoE User Group Configuration

Parameter	Description
User Group Name	Set the name of a user group. When you configure an authentication account, you can select a user group based on the name.
Uplink Bandwidth	The following uplink bandwidth options can be configured, all measured in Mbps. ● Limit-at: Guaranteed available uplink bandwidth for authenticated users when bandwidth resources are limited. ● Max-Limit: Maximum available uplink bandwidth for authenticated users when bandwidth resources are sufficient. ● Max-Limit per User: Maximum available uplink bandwidth for each user. This parameter is optional and the default value is no limit.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Downlink Bandwidth	The following downlink bandwidth options can be configured, all measured in Mbps. ● Limit-at: Guaranteed available downlink bandwidth for authenticated users when bandwidth resources are limited. ● Max-Limit: Maximum available downlink bandwidth for authenticated users when bandwidth resources are sufficient. ● Max-Limit per User: Maximum available downlink bandwidth for each user. This parameter is optional and the default value is no limit.
Apply To	● Designated interfaces: You need to select a specified interface or interfaces. Assume that a device has three outbound interfaces, if each user is allowed to use up to 10 Mbps upstream bandwidth and Interface is set to Each-WAN, the bandwidth is limited to 10 Mbps per WAN port and a maximum of 30 Mbps bandwidth is available to the user. ● ALL Interface: The flow control policy applies to the entire device. Regardless of the number of WAN ports on the device, the maximum bandwidths available to each user are the values specified in the Max-Limit per User fields.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Interface	Specify the interface to which the user group applies.

8.2.4 Configuring a PPPoE User Account

Choose **One-Device > Gateway > Config > Authentication > Account > Accounts**.

Click the **PPPoE Accounts** tab. Click **Add** to create a PPPoE authentication user account. The currently created PPPoE authentication user accounts are displayed in the **Account List** section. Find the target account and click **Edit** to modify the account information. Find the target account and click **Delete** to delete the account.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

The screenshot shows the 'PPPoE Accounts' management page in the Ruijie Cloud interface. At the top, there are tabs for 'Cloud Accounts', 'Cloud Voucher', 'Local Authentication Accounts', and 'PPPoE Accounts' (which is highlighted with a red box). Below the tabs is a blue information banner stating: 'If you want to use the Batch Config or Backup Config feature, Office 2019 or a later version is required. Otherwise, invalid format and garbled text may occur.' It also shows 'Concurrent Devices 128' and 'Clients 0'. Below the banner is a search bar labeled 'Search by Username' and four buttons: 'Batch Config', 'Backup Config', '+ Add' (highlighted with a red box), and 'Delete Selected'. Below these is a table with columns: Username, Password, Expire Date, Status, Account Management, Remarks, and Action. The table currently shows 'No Data'. At the bottom, there is a note 'Up to 300 entries can be added.' and a pagination bar showing 'Total 0', a page number '1' (highlighted with a blue box), and '10/page'.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add



* Username

* Password

Expire Date (?)

Remarks (?)

Status ☒

Rate Limiting ☒

* Account

Management

Cancel

OK

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 8-10 PPPoE user account configuration

Parameter	Description
Username/Password	Set the username and password of the authentication account for Internet access through PPPoE dialing.
Expire Date	Set the expiration date of the authentication account. After the account expires, it can no longer be used for Internet access through PPPoE authentication.
Remark	Enter the account description.
Status	Specify whether to enable this user account. If the account is disabled, the account is invalid and cannot be used for Internet access through PPPoE authentication.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Rate Limiting	Specify whether to apply flow control on the account. If flow control is enabled, you need to configure flow control policies for the PPPoE authentication user. If smart flow control is disabled, Rate Limiting must be turned off. To turn on Rate Limiting, enable smart flow control first.
Account Management	After Rate Limiting is toggled on, you need to associate a PPPoE user group with the current account to restrict the user bandwidth according to the user group. For details about the configuration of a PPPoE user group, see Section 8.2.3 Configuring the PPPoE User Groups .

8.2.5 Configuring Exceptional IP Addresses

Choose **One-Device > Gateway > Config > Advanced > PPPoE Server > Exceptional IP Address**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

When the PPPoE server is enabled, if you want to allow some IP addresses in a specific VLAN to access the Internet without passing account and password authentication, you can configure these IP addresses as exceptional IP addresses.

The currently created exceptional IP addresses are displayed in the **Exceptional IP Address List** section. Click **Edit** to modify the exceptional IP address. Click **Delete** to delete the exceptional IP address.

Exceptional IP Address List

[+ Add](#)[Delete Selected](#)

☐	Start IP Address ?	End IP Address ?	Remarks ?	Status ?	Action
☐	192.168.2.3	192.168.2.4		Enable	Edit Delete

Up to 5 entries can be added.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add



* Start IP Address ?

* End IP Address ?

Remarks ?

Status ? ☒

Cancel

OK

- **Start IP Address/End IP Address:** Start and end of exceptional IP addresses.
- **Remark:** Description of an exceptional IP address.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- **Status:** Whether the exceptional IP address is effective.

8.3 Online User Management

Choose **One-Device > Gateway > Config > Authentication > Online Clients**.

The online client list displays information about all the current online clients, including the client IP addresses, client MAC addresses, login time, and authentication modes. You can locate a client based on the IP address, MAC address, or username.

Online Clients

Search by IP Address

Enter

Q

Refresh

Delete Selected

☐	Username	IP	Device Name	MAC Address	Online Time	Duration(Sec)	Auth Type	Status	Action
No Data									

Total 0

<

1

>

10/page

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

9 Online Behavior Management

9.1 Overview

Online behavior management aims to block or prohibit specific Internet access behaviors of LAN users. Online behavior management functions are classified into five categories: app control, website filtering, QQ management, flow control, and access control. The effective range of each behavior management policy is flexibly controlled by the specified client IP address and effective time.

9.2 User Management

9.2.1 Overview

The management policy of online behavior needs to flexibly match with specific user groups. Please manage and classify users before the behavior management policy is configured, ensuring efficient configuration and

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

management. User management is used to maintain user information based on IP addresses. When managing online behaviors, you can limit the effective scope of application blocking, traffic auditing, flow control and other services by specifying created or authenticated users.

A user group contains three default root user groups: user group, authentication group, and VPN user group.

You can create and configure users and user groups in a user group.

400 of entries that can be added in a user group.Current User Groups: 1; Current Users: 1.

User Group

- Authentication Group
 - Local Authentication ...
- VPN Group

+ Add

Delete Selected

	Username	IP Range	MAC	Action
☐	All Addresses	1.1.1.1-255.255.255.255	-	Edit Delete

Total 1 < 1 > 10/page

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Note

- The system creates a VPN user group by default. The VPN accounts added in the system are automatically added to a VPN user group. You can select a VPN user group to control VPN accounts when you create a policy of application control, network management or flow control.
 - The RG-EG710XS, RG-EG406XS and RG-EG406XS-P contain four default root user groups: user group, authentication group, client group, and VPN user group.
-

9.2.2 User Group

Choose **One-Device > Gateway > Config > Behavior > User Management**.

You can add new user groups or users below the first-level user group. Up to three levels of grouping is supported. If a user is a leaf node, no users or user groups can be created below this leaf node. A created user group can be used as a configuration item in a behavior management policy and is directly referenced by the user group name.

All Addresses client exists in the user group list by default. The IP range is from 1.1.1.1 to 255.255.255.255. This client cannot be edited or deleted.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

400 of entries that can be added in a user group.Current User Groups: 1; Current Users: 1.

Search by Group

User Group

Authentication Group

Local Authentication ...

VPN Group

+ Add

Delete Selected

	Username	IP Range	MAC	Action
☐	All Addresses	1.1.1.1-255.255.255.255	-	Edit Delete

Total 1 < 1 > 10/page

1. Creating a User Group

Click  near **User Group** or click **Add** at the upper right of the page. Select the type of **User Group** and enter the group name, and click **OK**. You can create a sub-user group below this user group.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

Type ☒ User Group ☐ Client

Search by Group

User Group

+

▼ Authentication Group

Local Authentication ...

VPN Group

Parent Node

User Group

 × ▼

* Group Name

Please enter a name.

Cancel

OK

1 Configuration Guide

SD-WAN

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 9-1 Parameter Descriptions of User Group

Parameter	Description
Parent Node	Configure the parent group to which the created user group belongs. Up to three levels of groups are allowed below a user group currently (such as Root Node/R&D Center/R&D Section 1). No user groups are allowed below the third-level group.
Group Name	Configure the name of the user group.

2. Creating a User

Click **User Group** to display the users in the current group. Click  or click **Add** at the upper right of the page. Select the type of **Client** and enter the user name and IP range, and click **OK**. You can create a user under the user group.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Search by Group

+ Add

Delete Selected

▼ User Group

ruijie

+

▼ Authentication Group

Local Authentication ...

VPN Group

☐	Username	IP Range	MAC	Action
☐	All Addresses	1.1.1.1-255.255.255.255	-	EditDelete
Total 1		<1>	10/page	

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

Type ☐ User Group ☒ Client

Parent Node

* Username

Type ☒ IP ☐ MAC

* IP / IP Range

Cancel

OK

1 Configuration Guide

SD-WAN

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 9-2 Parameter Descriptions of User

Parameter	Description
Parent Node	Configure the group to which the created user belongs, Click the drop-down list box to display all the currently created user groups and click to select one group.
Username	Configure the name of the user.
IP /IP Range	Configure the IP address of the user. You can enter an IP address or IP range. If a rule is valid to this user, the rule takes effect in this IP range.

3. Deleting a User Group or a User

Click  near **User Group** to delete the user group and its members. Click **Delete** in the **Action** bar in the user list to delete the specified user.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Search by Group	+ Add	Delete Selected
▼ User Group	+ +	
ruijie	+ -	
▼ Authentication Group		
Local Authentication ...		
VPN Group		
		Total 1 < 1 > 10/page

4. Verifying Configuration

- (1) You can view the created user groups on the left part of the page after user groups and users are configured. Click **User Group** to view user details in this group.

Search by Group	+ Add	Delete Selected
▼ User Group	+ +	
ruijie	+ -	
▼ Authentication Group		
Local Authentication ...		
VPN Group		
		Total 1 < 1 > 10/page

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (2) When configuring the behavior management policy (such as adding an application control rule), you can view and select the created user groups and the members.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add Website Filtering



Type ☒ User Group ☐ Custom

* User Group ?

Time

* Blocked Website

Remarks

Status ☒

Select

☐ User Group

☐ All Addresses

☐ ruijie

☐ user1

☐ Authentication Group

☐ VPN Group

Cancel

OK

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

9.2.3 Authentication Group

Choose **One-Device > Gateway > Config > Behavior > User Management**.

The users in the **Authentication Group** are synchronized from the authentication server to the **Authentication Group**. The local authentication account set by the device (See Section [8.1.5 Local Account Authentication](#) for details.) is automatically synchronized to the **Local Authentication Group**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Cloud Auth Local Account Auth Authorized Auth QR Code Auth Allowlist Online Clients

* Auth IP / IP Range ?

Example: 1.1.1.1-1.1.1.100

Add

MAB validity period

Custom

* Custom Time

365

days

Save

Account Settings ?

Search by Username

+ Add

Delete Selected

Refresh

☐	Username	Password	At most of Concurrent Users	MAC Address ?	Action
☐	test	*****	5		Edit Delete

Up to 200 accounts can be added.

Total 1 < 1 > 10/page

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

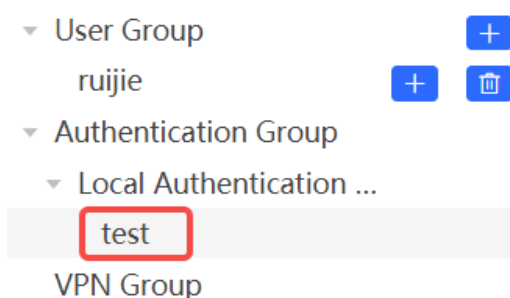

When configuring the behavior management policy (such as adding an application control rule), you can configure a policy to take effect in the specified authentication group. After an authenticated user goes online, the user automatically matches with the authentication group and then associates with the behavior management policy, enabling online behavior control over the authenticated user.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add Website Filtering



Type ☒ User Group ☐ Custom

* User Group ?	Select
Time	☐ User Group ☐ All Addresses
* Blocked Website	☐ ruijie ☐ user1
Remarks	☐ Authentication Group ☐ Local Authentication Gro...
Status	☐ test ☐ VPN Group

Cancel

OK

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

9.3 Time Management

Choose **One-Device > Gateway > Config > Behavior > Time Management**.

You can create time entries to classify time information. A created time entry can be used as a configuration item in a behavior management policy and is directly referenced by the time entry name.

All the created time entries are displayed in the time entry list. In the list, find the target time entry and click **Edit** to modify the time span. Find the target time entry and click **Delete** to delete it. By default, the time entries named **All Time**, **Weekdays**, and **Weekends** are available and they cannot be modified or deleted.

Caution

If a time entry is referenced in any policy, it cannot be deleted on the **Time Management** page. To delete the time entry, remove the reference relationship first.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Time List

[+ Add](#)[Delete Selected](#)

☐	Schedule Name	Time Span	Action ?
☐	app_6BD100B822B681658CE0		Edit Delete
☐	app_84581586C3D5FDF2FF15		Edit Delete
☐	Weekends		Edit Delete
☐	Weekdays		Edit Delete
☐	All Time		Edit Delete

Up to 20 entries can be added.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.


Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

9.3.1 Configuring a Schedule by Week

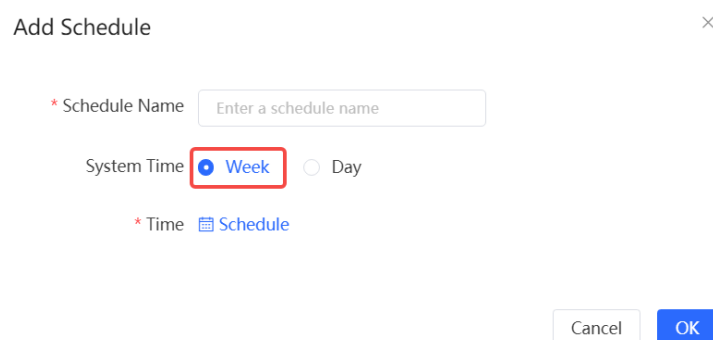

- (1) Click **+Add**. On the **Add Schedule** page that is displayed, enter the name of the schedule.
- (2) Set **System Time** to **Week**.
- (3) Click **Wireless Schedule** to set the time period. On the **Schedule** pop-up box, set the time period to be repeated every week and click **OK**.

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

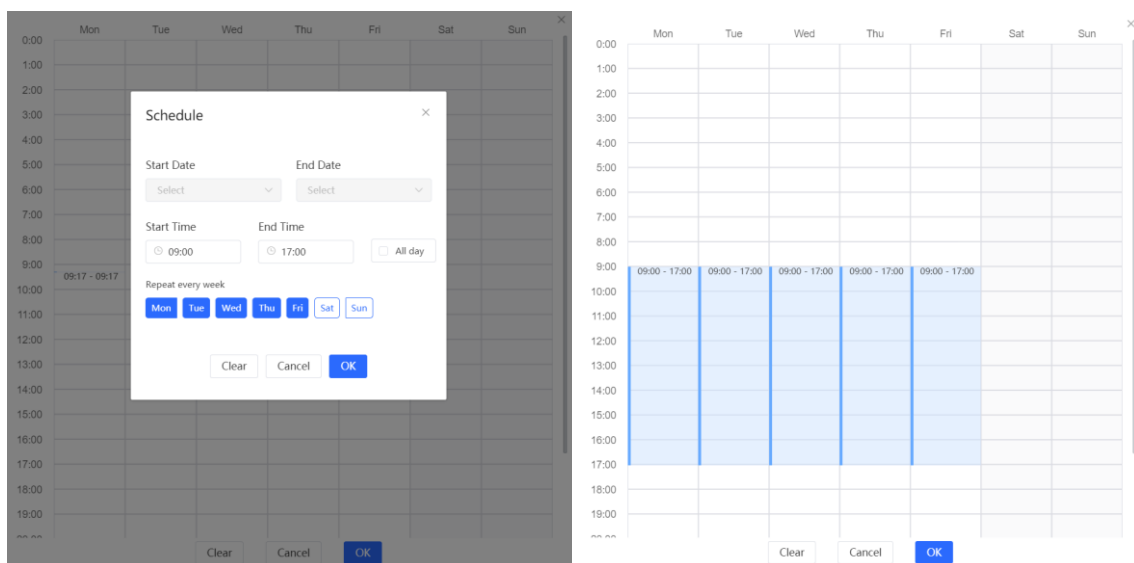

- (4) Click **OK**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

9.3.2 Configuring a Schedule by Date

Add Schedule

×

* Schedule Name

System Time

☐ Week

☒ Day

Time

-

Cancel

OK

- (1) Click **+Add**. On the **Add Schedule** page that is displayed, enter the name of the schedule.
- (2) Set **System Time** to **Day**.
- (3) Choose the start and end dates, and click **OK**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

2024-03-22

10:00

>

2024-04-21

00:00

« <

2024 March

> »

Sun	Mon	Tue	Wed	Thu	Fri	Sat
25	26	27	28	29	1	2
3	4	5	6	7	8	9
10	11	12	13	14	15	16
17	18	19	20	21	22	23
24	25	26	27	28	29	30
31	1	2	3	4	5	6

2024 April

> »

Sun	Mon	Tue	Wed	Thu	Fri	Sat
31	1	2	3	4	5	6
7	8	9	10	11	12	13
14	15	16	17	18	19	20
21	22	23	24	25	26	27
28	29	30	1	2	3	4
5	6	7	8	9	10	11

Clear

OK

- (4) Click **OK**.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

9.4 App Control

9.4.1 Overview

App control aims at controlling the range of specific apps that can be accessed by users. By default, users can access any app. After an app control policy is configured, users in the current network cannot access prohibited apps. App access can be prohibited based on the specified user group and time range. For example, employees in the office network are prohibited from accessing entertainment and game software during work periods to improve network security.

9.4.2 Configuring App Control

Choose **One-Device > Gateway > Config > Behavior > App Block > App Control**.

1. Configuring App Control

Click **Add** to create an App control policy.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

App Control

[+ Add](#)[Delete Selected](#)

☐	User Group	Time ?	Blocked applications ?	Status ?	Remarks ?	Action
☐	User Group	All Time		Enable		Edit Delete
☐	User Group/3dbbuser Unknown	All Time	... More	Enable	BLOCK_7708EBC4CF4490C 55D68	Edit Delete

Up to 50 entries can be added.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

Type ☒ User Group ☐ Custom

* User Group 

Time 

Application ☒ Blocked applications ☐ Blocked Application Group

* Application List

Remarks 

Status  ☒

Cancel

OK

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 9-3 App control policy configuration

Parameter	Description
Type	● User Group: The policy is applicable to users in the specified user group. Please select the target user group. ● Custom: The policy is applicable to users in the specified IP range. Please manually enter the managed IP range.
User Group	Select the users managed by the policy from the list of user groups. For the configuration of the user group list, see Section 9.2 User Management . If all members in the user group are selected, the policy takes effect on the user group and is also valid for new members added to this group.
IP Address Group	If the IP range is restricted by the APP control policy and the type of the policy is set to Custom , please enter the IP range manually.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Time	Specify the time range under app control. In the specified time range, managed clients cannot access the selected apps in the list of prohibited apps. You can select a time range defined in Section 9.3 Time Management from the drop-down list box, or select Custom and manually enter the specific time range.
Application	Specify the applications or application groups to block.
Application List	When Blocked applications is selected, you can select the applications that need to be blocked.
App Group	When Blocked Application Group is selected, you can select the application groups that need to be blocked.
Remarks	Enter the policy description.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Status	Specify whether to enable the app control policy.

9.4.3 Custom App

1. Overview

Based on traffic packets of certain websites or apps that are captured by the device, users can analyze and extract 5-tuple information characteristics (protocol, source IP address, source port, destination IP address, and destination port) of the packets. You can define apps that are not in the default application list.

After custom apps are configured successfully, you can configure control policies for custom apps on the app control page to block users from accessing the custom apps on the current network.

2. Procedure

Choose **One-Device** > **Gateway** > **Config** > **Behavior** > **App Block** > **Custom**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (1) Click **Add**. Enter information about a custom app.

Custom		App		+ Add		Delete Selected	
☐	App	Protocol Type	Source IP	Destination IP	Source Port	Destination Port	Action
☐	APP	TCP	Auto Assign	192.168.10.1	Auto Assign	80	Edit Delete
Up to 500 entries can be added.				Total 1	< 1 >	10/page	

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

* App

Protocol Type

TCP



Control Type

Dest IP + Dest Port



* Destination IP

☒ Enter Manually

☐ Auto Assign

Example: 1.1.1.1 or 1.1.1.1-1.1.1.10



* Destination Port

☒ Enter Manually

☐ Auto Assign

Example: X or X-X (Range: 1-65535)

Cancel

OK

1 Configuration Guide

SD-WAN

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 9-4 Description of Custom App Configuration

Parameter	Description
App	Configure the app name (the name cannot be duplicated with a name in the app list).
Protocol Type	Select a protocol type based on the protocol used by captured packets. It can be set to TCP , UDP , or IP .
Control Type	Select a rule type based on 5-tuple information characteristics of extracted packets. It can be set to the following: ● Src IP + Src Port ● Dest IP + Dest Port ● Src IP+ Dest IP
Source/Destination IP	Enter a characteristic IP address.
Source/Destination Port	Enter a characteristic port number.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Note

- If **Control Type** is set to **Src IP + Src Port**, you need to set the source IP address and source port.
- If **Control Type** is set to **Dest IP + Dest Port**, you need to set the destination IP address and destination port.
- If **Control Type** is set to **Src IP + Dest IP**, you need to set the source and destination IP addresses. The source IP address can be also to **Auto Assign**.

- (2) Click **OK**.

Custom							
		App		+ Add		Delete Selected	
☐	App	Protocol Type	Source IP	Destination IP	Source Port	Destination Port	Action
☐	APP	TCP	Auto Assign	192.168.10.1	Auto Assign	80	Edit Delete
☐	test	IP	Auto Assign	192.168.1.1	Auto Assign	Auto Assign	Edit Delete
Up to 500 entries can be added.				Total 2	< 1 >	10/page	

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

9.4.4 Custom Application Group

1. Overview

You can add multiple applications with the same features into a customer application group, which is a logical group. The custom application group can be used for policy.

The system has a default blocking group to block applications. (The blocking group is associated with relevant applications by default.) The applications added to the blocking group are directly blocked.

2. Procedure

Choose **One-Device > Gateway > Config > Behavior > App Block > Custom Application Group**.

- (1) Click **Add** to configure the parameters for an application group.

Custom Application Group

App

+ Add

Delete Selected

☐	Group Name	Application List	Citation Count	Remarks	Action ?
☐	Block Group ?	-	1	-	Edit Delete

Up to 20 entries can be added.

Total 1 < 1 > 10/page

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

* Group Name

Application List

Select



Remarks

Cancel

OK

1 Configuration Guide

SD-WAN

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 9-5 Custom Application Group

Parameter	Description
Group Name	The application group name customized by a user. (The group name must differ from the application names in the group list.)
Application List	Multiple applications involved in an application group.
Remark	Description of an application group.

- (2) Click **OK**.

9.5 Website Management

9.5.1 Overview

Website management consists of website grouping and website filtering. Website grouping refers to the classification of website URLs. You can modify existing website groups or create new website groups. Website

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

filtering refers to access control to existing website groups to prohibit user access to websites in specific groups. Website filtering can be applied based on the specified user group and time range. For example, employees in the office network are prohibited from accessing game websites during work periods to improve network security.

9.5.2 Configuration Steps

Choose **One-Device > Gateway > Config > Behavior > Website Management**.

1. Configuring Website Groups

Choose **One-Device > Gateway > Config > Behavior > Website Management > Website Group**.

Click the **Website Group** tab. On the page that appears, all the created website groups are displayed in the list. Find the target group and click **More** in the **Member** column to view all the website URLs in the group. Find the target group and click **Edit** in the **Action** column to modify the member website URLs in the group. Find the target group and click **Delete** in the **Action** column to delete the group.

Click **Add** to create a new website group.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

⚠ Caution

If a website filtering rule in a website group is being referenced, the group cannot be deleted from the website group list. To delete this group, modify the website filtering configuration to remove the reference relationship first.

Website Group

Website Filtering

+ Add

Delete Selected

☐	Group Name	Member	Action
☐	Games	duowan.com... More	Edit Delete
☐	Finance	*.10jqka.com.cn... More	Edit Delete
☐	Social	*.baihe.com... More	Edit Delete
☐	Shopping	*.taobao.com... More	Edit Delete
☐	Life	*.55bbs.com... More	Edit Delete
☐	Music	*.1ting.com... More	Edit Delete

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add Group



* Group Name

Please enter a group name 1-64 characters

* Member

Set group members. The group member can be a complete URL (example: www.baidu.com) or a domain (example: *.56.com). If you want to add a domain, please make sure that the domain starts with *.

Cancel

OK

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 9-6 Website group configuration

Parameter	Description
Group Name	Configure a unique name for the website group. The name can be a string of 1 to 64 characters.
Member	Specify members in the website group. You can enter multiple websites in a batch. The group member can be complete URL (such as www.baidu.com) or keywords in the URL (domain name with a wildcard in front, such as *.baidu.com). The wildcard can only appear at the beginning of a URL, and it cannot be in the middle or end of the domain name.

2. Configuring Website Filtering

Choose **One-Device > Gateway > Config > Behavior > Website Management > Website Filtering**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (1) Click the **Website Filtering** tab. On the page that appears, all the created website filtering rules are displayed in the list.
- (2) Click **Add** to create a website filtering rule.

Website Filtering + Add Delete Selected

	User Group	Control Type	Blocked Website	Time	Status	Remarks	Action
No Data							

Up to 20 entries can be added.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add Website Filtering



Type ☒ User Group ☐ Custom

* User Group

Time

* Blocked Website

Remarks

Status ☒

Cancel

OK

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 9-7 Website filtering rule configuration

Parameter	Description
Type	● User Group: The policy is applicable to users in the specified user group. Please select the target user group. ● Custom: The policy is applicable to users in the specified IP range. Please manually enter the managed IP range.
User Group	Select the users managed by the policy from the list of user groups. For the configuration of the user group list, see Section 9.2.2 User Group . If all members in the user group are selected, the policy takes effect on the user group and is also valid for new members added to this group.
IP Address Group	If the IP range is restricted by the APP control policy and the type of the policy is set to Custom , please enter the IP range manually.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Time	Specify the time range under website filtering control. In the specified time range, managed clients cannot access the prohibited websites. You can select a time range defined in Section 9.3 Time Management from the drop-down list box, or select Custom and manually enter the specific time range.
Blocked Website	Configure the type of websites to block. You can select an existing website group. After a website group is selected, users are prohibited from accessing all websites in this group. For details on how to create or modify a website group, see Section Configuring Website Groups .
Remarks	Enter the rule description.
Status	Specify whether to enable the website filtering rule.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

After the website filtering rules are configured, click **Edit** to modify the rule information. Click **Delete** to delete the specific filtering rule.

9.6 QoS

9.6.1 Overview

QoS is a mechanism that classifies flows based on certain rules and processes flows using different policies based on their categories. You can configure QoS to guarantee key flows and suppress malicious flows. You can enable QoS when the bandwidth is insufficient or flows need to be distributed properly.

9.6.2 Smart QoS

1. Overview

When you need to limit the uplink traffic and downlink traffic bandwidth of the device ports (such as WAN and WAN 1), you can enable the smart QoS function. After the line bandwidth is configured for a port, the uplink and

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

downlink traffic of the port will be limited within the specified range. In addition, the per user bandwidth should be intelligently adjusted according to the number of users to ensure that users fairly share the bandwidth.

2. Configuration Steps

Choose **One-Device > Gateway > Config > Behavior > QoS > Smart QoS**.

Enable ? ☒

If you want to test the WAN rate, please disable smart flow control first.

WAN0 Bandwidth ? * Uplink Mbps * Downlink Mbps

WAN1 Bandwidth ? * Uplink Mbps * Downlink Mbps

Save

1 Configuration Guide

SD-WAN

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Turn on **Enable** on the **Smart QoS** tab and set the line bandwidth based on the bandwidth actually allocated by the ISP. If the device has multiple lines, you can set the bandwidth for these WAN interfaces separately. For details on the multi-line configuration, see Section [4.2 Port Settings](#).

Click **Save** to make the configuration take effect.

Caution

Enabling QoS will affect network speed testing. If you want to test the network speed, disable QoS first.

Table 9-8 Smart QoS configuration

Parameter	Description
Enable	Specify whether to enable the smart QoS function. By default, smart QoS is disabled.
WAN Bandwidth	Set the uplink and downlink bandwidth limits for the WAN interfaces, in Mbit/s.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Note

Smart QoS can be used to control the line traffic in different networking modes, including bandwidth-based, static IP address, and dynamic IP address.

9.6.3 Custom Policies

1. Overview

Custom policies are used to restrict the traffic with specific IP addresses based on the smart QoS function, thereby meeting the bandwidth requirements of specific users or servers. When you create a custom QoS policy, you can flexibly configure the limited user range, the bandwidth limit, the limited application traffic, and the rate limit mode. When a custom policy is enabled, it takes precedence over the smart QoS configuration.

Custom policies fall into common policies and VPN policies.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Common policies include the custom policies configured on the web interface or Ruijie Cloud and the QoS policies configured on Ruijie Cloud for authentication accounts. Common policies manage common traffic.

Common policies and VPN policies are used to manage common traffic and VPN traffic, respectively.

2. Getting Started

Before you configure a custom policy, enable smart QoS first. For details, see Section [9.6.2 Smart QoS](#).

3. Configuring a Normal Policy

Choose **One-Device > Gateway > Config > Behavior > QoS > Custom Policy**.

Note

The QoS policies configured on Ruijie Cloud and the web interface are displayed in the **Normal Policy** list. The QoS policies for authentication accounts configured on Ruijie Cloud cannot be edited or deleted on the web interface. You can only enable or disable these policies and change the priority of them.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (1) Set **Policy Type** to **Normal Policy** and click **Add** to create a custom QoS policy.

You can set up to 30 custom common policies, including the custom policies configured on the web interface and Ruijie Cloud.

You can set up to 20 QoS policies for authentication accounts on Ruijie Cloud. The web interface only displays these policies.

Policy Type ☒ Normal Policy ☐ VPN Policy

Policy List ? + Add Delete Selected

☐	Policy Name ?	User Group	Time	IP/DSCP Priority	Bandwidth Type ?	Channel Priority	Appl
☐	22	VPN Group	All Time 	--	Shared	4	All /
☐	test	192.168.6.2-192.168.6.254	All Time 	--	Independent	5	Cus

Up to 30 entries can be added. 2 entries are already added.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (2) Configure items related to a common policy.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

* Policy Name

Type

☒ User Group

☐ Custom

* User Group ?

Select...

Application ?

☒ All Applications

☐ App Group

☐ Custom

Bandwidth Type ?

☒ Shared

☐ Independent

Bandwidth Limit

☒ Limit

☐ No Limit

Uplink Bandwidth ?

* Limit-at

Mbps

Mbps

* Max-Limit

Mbps

Mbps ?

Downlink Bandwidth ?

* Limit-at

Mbps

Mbps

* Max-Limit

Mbps

Mbps ?

* Interface

Each-WAN

Enabled

☒

Advanced Settings

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Starting from ReyeeOS 2.340, the system supports device-level traffic control. When the **Bandwidth Type** is set to **Independent**, you can limit the upload and download bandwidth for each user by applying the policy to **ALL Interface**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

* Policy Name

Type

☒ User Group

☐ Custom

* User Group ?

Select...

Application ?

☒ All Applications

☐ App Group

☐ Custom

Bandwidth Type ?

☐ Shared

☒ Independent

Bandwidth Limit

☒ Limit

☐ No Limit

Uplink Bandwidth ?

* Limit-at

Mbps

Mbps

* Max-Limit

Mbps

Mbps ?

Downlink Bandwidth ?

* Limit-at

Mbps

Mbps

* Max-Limit

Mbps

Mbps ?

Max-Limit per User

Uplink

No Limit by

Mbps

Downlink

No Limit by

Mbps

Bandwidth

Bandwidth

Apply To ?

☐ Designated interfaces

☒ ALL Interface

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 9-9 Configuration of a Custom Policy

Parameter	Description
Policy Name	A policy name uniquely identifies a custom QoS policy. It cannot be modified.
Type	The type of a QoS policy can be set to the following: ● User Group: Indicates that the policy is applied to users in a specified user group. You need to select a user group to be managed. ● Custom: Indicates that the policy is applied to users in a specified IP address segment. You need to manually enter the IP address range to be managed.
User Group	Select a user to be managed by the policy from the user group list. For details about how to set the user group list, see Section 9.2 User Management . If you select all members of a user group, the policy takes effect on the entire user group (it also takes effect on members added to the user group later). This parameter is required when Type is set to User Group .

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
IP/IP Range	Specify the IP address range for the QoS policy to take effect. When Type is set to Custom, enter the IP address manually. You can enter a single IP address or an IP address segment. This parameter is required when Type is set to Client. The IP address range must be within a LAN segment. You can choose One-Device > Gateway > Monitor > Ethernet status to check the network segment of the current LAN port. For example, the network segment of the LAN port shown in the figure below is 192.168.2.0/24. Total 0 Ethernet status ⓘ 

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Application	When Bandwidth Type is set to Shared, the QoS policy can be configured to take effect only on specified applications. ● All Applications: Indicates that the QoS policy takes effect on all applications in the current application library. ● Application Group: Indicates that the QoS policy takes effect only on specified applications in the application list. For details about how to set the application group list, see Section 9.4.4 Custom Application Group. ● Custom: Indicates that the QoS policy takes effect only on specified applications in the application list. When Bandwidth Type is set to Independent, some models do not support application selection and the QoS policy takes effect on all applications in the current application library by default. For the models, contact technical support engineers.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Application Group	When Application is set to Application Group , it specifies the application groups, on which the policy takes effect. The traffic of the selected application group is subject to the policy.
Application List	When Application is set to Custom , it specifies the applications, on which the policy takes effect. The traffic of the selected applications is subject to the policy.
Bandwidth Type	● Shared: Indicates that all users in a user group (all IP addresses in an address range) share the configured uplink and downlink bandwidths, and the bandwidth of a single user is not limited. ● Independent: Indicates that all users in a user group (all IP addresses in an address range) share the configured uplink and downlink bandwidths, and the maximum bandwidth of a single user can be limited.
Bandwidth Limit	Configure whether to limit the bandwidth. ● Limit: You can set the uplink and downlink bandwidth limits as needed. ● No Limit: When the bandwidth is sufficient, the maximum bandwidth is not limited. When the bandwidth is insufficient, the minimum bandwidth cannot be guaranteed.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Uplink/ Downlink Bandwidth	Configure the data transmission rate in uploading and downloading, in Mbps. It includes Limit-at, Max-Limit, and Max-Limit per User. ● Limit-at: Specifies the minimum bandwidth that can be shared by all users when the bandwidth is insufficient. ● Max-Limit: Specifies the total maximum bandwidth that can be occupied by all users when the bandwidth is sufficient. ● Max-Limit per User: Specifies the maximum bandwidth that can be occupied by each user when multiple users share the bandwidth. It is optional and can be configured only when Bandwidth Type is set to Independent. The rate is not limited by default.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Apply To	In ReyeeOS 2.340 and later, when the Bandwidth Type is set to Independent, you can select the scope of application for the traffic policy. ● Designated interfaces: You need to select specific interfaces. For example, if the device has three WAN ports and each user is limited to a maximum of 10 Mbps upload bandwidth, selecting Each-WAN means the total available bandwidth will add up to 30 Mbps for the user. ● ALL Interface: The traffic control policy applies at device level. Each user's maximum bandwidth is limited to the value specified in Max-Limit per User, regardless of the number of WAN ports.
Interface	Specify the WAN interface, on which the policy takes effect. When it is set to Each-WAN , the policy will be applied to all WAN interfaces.
Enabled	Set whether to enable the QoS policy. If it is disabled, the policy does not take effect.
IP/DSCP Priority	Specifies the priority of packets to differentiate various types of traffic and allocate different levels of service quality. QoS policies are applied based on the IP/DSCP field in the packet.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Channel Priority	Specify the traffic guarantee level. The value range is from 0 to 7. A smaller value indicates a higher priority and the value 0 indicates the highest priority. Different traffic priority values correspond to different application groups in an application template. 2 indicates the key group, 4 indicates the normal group, and 6 indicates the suppression group. For the description of application groups in a priority template, see 9.6.4 Application Priority.
Time	Specifies the time period during which the rule takes effect. You can choose from existing time rules or create custom ones.

- (3) Click **OK**.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

4. Configuring a VPN policy.

Choose **One-Device > Gateway > Config > Behavior > QoS > Custom Policy**.

Note

The QoS policies configured on Ruijie Cloud and the web interface are displayed in the **Normal Policy** list. The QoS policies for authentication accounts configured on Ruijie Cloud cannot be edited or deleted on the web interface. You can only enable or disable these policies and change the priority of them.

- (1) Set **Policy Type** to **VPN Policy** and click **Add** to create a custom VPN QoS policy.

A maximum of 10 VPN policies can be configured.

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

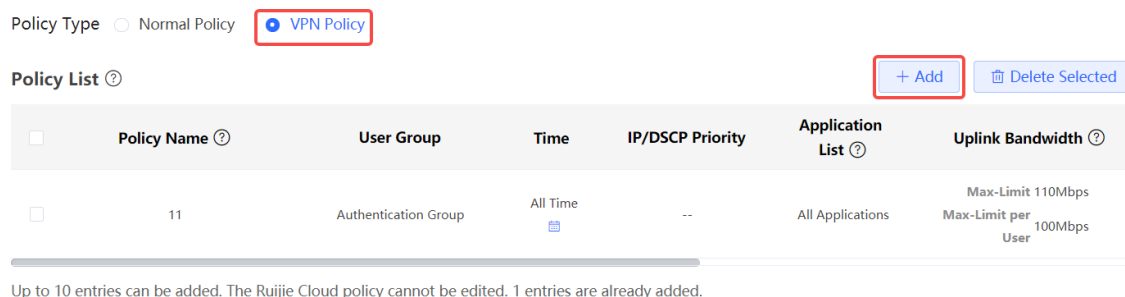

Policy Type ☐ Normal Policy ☒ VPN Policy

Policy List ⓘ + Add Delete Selected

☐	Policy Name ⓘ	User Group	Time	IP/DSCP Priority	Application List ⓘ	Uplink Bandwidth ⓘ
☐	11	Authentication Group	All Time	--	All Applications	Max-Limit 110Mbps Max-Limit per User 100Mbps

Up to 10 entries can be added. The Ruijie Cloud policy cannot be edited. 1 entries are already added.

- (2) Configure items related to a VPN policy.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add



* Policy Name

Type ☒ User Group ☐ Custom

* User Group ?

Effective User ?

☒ Internal IP/User ☐ External IP/External User

Application ?

☒ All Applications ☐ App Group ☐ Custom

Bandwidth Limit

☒ Limit ☐ No Limit

Uplink Bandwidth ?

* Max-Limit

Mbps

Mbps ?

Max-Limit

No Limit b

Mbps

per User

Downlink Bandwidth ?

* Max-Limit

Mbps

Mbps ?

Max-Limit

No Limit b

Mbps

per User

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 9-10 Configuration of a Custom VPN Policy

Parameter	Description
Policy Name	A policy name uniquely identifies a custom QoS policy. It cannot be modified.
Type	The type of a QoS policy can be set to the following: ● User Group: Indicates that the policy is applied to users in a specified user group. You need to select a user group to be managed. ● Custom: Indicates that the policy is applied to users in a specified IP address segment. You need to manually enter the IP address range to be managed.
User Group	Select a user to be managed by the policy from the user group list. For details about how to set the user group list, see Section 9.2 User Management . If you select all members of a user group, the policy takes effect on the entire user group (it also takes effect on members added to the user group later). This parameter is required when Type is set to User Group .

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
IP/IP Range	Enter an IP address or IP range manually. This parameter is required when Type is set to Client .

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Effective User	Specify the type of effective users. It can be set to the following: ● Internal IP/User: For a gateway, IP addresses of clients connected to the gateway are internal IP addresses. ● External IP/External User: For a gateway, non-gateway internal IP addresses are external IP addresses. The configuration suggestions are as follows: ● When clients are configured to control VPN traffic, select Internal IP/ User to control the traffic of internal network users. When the VPN server is configured to control the VPN traffic, select External IP/External User to control the traffic of external network users. ● For the VPN of the NAT model, the external IP address of the server must be in the IP address segment of the VPN address pool. ● For the VPN in router mode, the IP address segment must be set to IP addresses of restricted users. For the VPN in router mode, to configure QoS on internal IP addresses of clients, set internal IP addresses to the IP addresses of the QoS objects. Note: The external IP address configured by the Open VPN server is the IP address of the address pool. The internal IP address configured by the client is the actual IP address of the client.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Application	● All Applications: Indicates that the QoS policy takes effect on all applications in the current application library. ● Custom: Indicates that the QoS policy takes effect only on specified applications in the application list. ● Application Group: Indicates that the QoS policy takes effect only on specified application groups. The traffic of applications involved in the application group is subject to the policy. For details about how to set the application group list, see Section 9.4.4 Custom Application Group.
Application List	When Application is set to Custom , it specifies the applications, on which the policy takes effect. The traffic of the selected applications is subject to the policy.
Application Group	When Application is set to Application Group , it specifies the application group, on which the policy takes effect. The traffic of the selected application group is subject to the policy.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Bandwidth Limit	Configure whether to limit the bandwidth. ● Limit: You can set uplink and downlink bandwidth limits as needed. ● No Limit: When the bandwidth is sufficient, the maximum bandwidth is not limited. When the bandwidth is insufficient, the minimum bandwidth is not guaranteed.
Uplink/Downlink Bandwidth	Configure the maximum uplink/downlink bandwidth shared by VPN users matching the policy in Mbps. When the bandwidth is shared by multiple users, you can also set the maximum uplink/downlink bandwidth per user in Mbps. The uplink/downlink bandwidth is not limited by default. Note: The parameter is valid when Bandwidth Limit is set to Limit .
Interface	Specify the VPN port, on which the policy takes effect. When it is set to All VPN Ports , the policy will be applied to all VPN ports.
Enabled	Set whether to enable the QoS policy. If it is disabled, the policy does not take effect.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
IP/DSCP Priority	Specifies the priority of packets to differentiate various types of traffic and allocate different levels of service quality. QoS policies are applied based on the IP/DSCP field in the packet.
Time	Specifies the time period during which the rule takes effect. You can choose from existing time rules or create custom ones.

- (3) Click **OK**.

5. View Custom Policies

The current custom policies are displayed in the **Policy List** section. You can modify and delete a custom policy. To delete multiple custom policies in a batch, select the desired policies and click **Delete Selected**.

- Normal policy list

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Policy Type ☒ Normal Policy ☐ VPN Policy

Policy List ⓘ

+ Add

Delete Selected

☐	Policy Name ⓘ	User Group	Bandwidth Type ⓘ	Channel Priority	Application List ⓘ	Uplink Bandwidth ⓘ
☐	test	User Group	Shared	4	All Applications	Limit-at 2Mbps Max-Limit 1000Mbps

Up to 30 entries can be added. 1 entries are already added.

- VPN policy list

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Policy Type ☐ Normal Policy ☒ VPN Policy

Policy List ?

+ Add

Delete Selected

☐	Policy Name ?	User Group	Application List ?	Uplink Bandwidth ?	Downlink Bandwidth ?
☐	L2TP	VPN Group	All Applications	Max-Limit 1000Mbps Max-Limit per User 100Mbps	Max-Limit 1000Mbps Max-Limit per User 100Mbps
☐	IPSec	VPN Group	All Applications	Max-Limit 1000Mbps Max-Limit per User 100Mbps	Max-Limit 1000Mbps Max-Limit per User 100Mbps

Up to 10 entries can be added. The Ruijie Cloud policy cannot be edited. 2 entries are already added.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 9-11 Policy list information

Parameter	Description
Application List	The Application List contains the applications to which the policy is valid. If the Application Library matches with the Application that is set to Custom and supported by the policy, Custom is displayed in the Application List . If not, Custom is displayed.
Status	Indicate whether the current policy is enabled. You can click to edit the status. If the Application Library does not match with the Application that is set to Custom and supported by the policy, you cannot edit the Status directly. Please click Edit in the action bar to edit the policy.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Effective State	Indicate whether the policy is effective in the current system. If Inactive is displayed, check whether the policy is enabled, whether the policy-enabled port exists, and whether the Application Library matches with the Application to which the policy is valid.
Match Order	All the created custom policies are displayed in the policy list, with the latest policy listed on the top. The device matches the policies according to their sorting in the list. You can manually adjust the policy matching sequence by clicking  or  in the list.
Action	You can modify and delete the custom policy.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

9.6.4 Application Priority

1. Overview

After smart QoS is enabled, you can set the application priority to provide guaranteed bandwidth to applications with high priority and suppress the bandwidth for applications with low priority. You can predefine a list of applications whose bandwidth needs to be guaranteed preferentially and a list of applications whose bandwidth needs to be suppressed based on actual needs.

Caution

If one application exists in both the custom policy list and the application priority list, the custom policy prevails.

2. Getting Started

- Before you configure application priority, enable smart QoS first. For details, see Section [9.6.2 Smart](#).
- Confirm that the appropriate application library is selected on the **Custom Policy** page (See Section [9.6.3 Custom Policies](#) for details.).

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

3. Configuration Steps

Choose **One-Device > Gateway > Config > Behavior > QoS > Application Priority**.

- (1) Create an application priority template.

Select a template from the **Application Priority** drop-down list box.

Five application priority templates are predefined to meet the needs in different scenarios. You can switch among the templates based on actual needs.

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

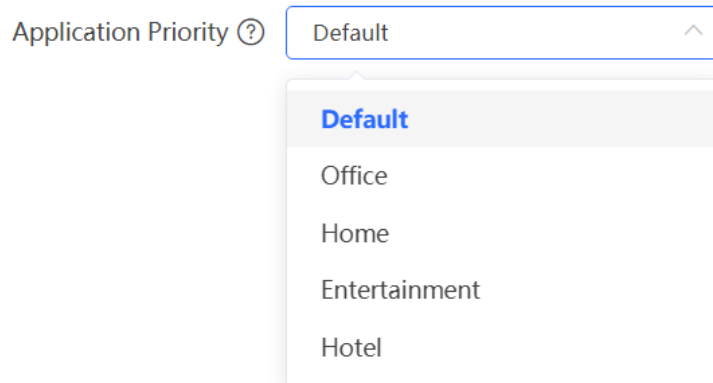

The application priority templates are as follows:

- **Default:** This template is used during device initialization. The traffic bandwidth is not guaranteed or suppressed for any application.
- **Office:** This template is designed for the office scenario, where the application traffic from the office network is guaranteed preferentially.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- o **Home:** This template is designed for the home scenario, where the application traffic from the home network is guaranteed preferentially.
 - o **Entertainment:** This template is designed for the entertainment scenario, where the application traffic from the entertainment network is guaranteed preferentially.
 - o **Hotel:** This template is designed for the hotel scenario, where the application traffic from the hotel network is guaranteed preferentially.
- (2) Create an application group list.
- Each default template has three application groups: key group, block group, and normal group. The application priority of the three groups decreases in the following order: key group, normal group, and block group.
- o **Key Group:** The traffic from applications in the application list for this group is guaranteed preferentially.
 - o **Block Group:** The traffic from applications in the application list for this group is suppressed to preferentially guarantee the traffic from applications with higher priority.
 - o **Normal Group:** All the applications in the application library beyond the key group and block group are in this group. The traffic from applications in this group are guaranteed after that from the key group.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

After you select a template, three application groups **Key Group**, **Block Group**, and **Normal Group** and the application list for each group in the current template are displayed. You can click **More** to view the details of each application list.

You can click **Edit** in the **Action** column next to the key group and block group to edit the application list for the groups, allowing the traffic from these applications to be guaranteed or suppressed.

Application Group List

Group Name	Application List	Action
Key Group	Video... More	Edit
Suppression Group	Databank... More	Edit
Normal Group	Other	Edit

Application List(2)

[Databank](#) [P2PSoftware](#)

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Edit

×

Group Name

Suppression Group

Application List

Databank × P2PSoftware × × ▲

▶ ☐ Communication

▶ ☐ Shopping

☐ Play

▶ ☒ Databank

▶ ☒ P2PSoftware

▶ ☐ Payment

▶ ☐ NetworkService

Cancel

OK

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

9.7 Access Control

9.7.1 Overview

The access control function matches data packets passing through the device based on specific rules and permits or drops data packets in the specified time range. This function controls whether to permit LAN user access to the Internet and whether to block a specific data flow. The device matches packets based on the MAC address or IP address.

9.7.2 Configuration Steps

Choose **One-Device > Gateway > Config > Behavior > Access Control**.

The access control rule list displays the created access control rules. Click **Add** to add an access control rule.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Configure ACL based on IP addresses. **Default reverse flow mismatches.**

The L2TP/PPTP/OpenVPN VPN only supports the IP-based ACL. The dest networks must be configured in the internal network.

Example: Configure a deny ACL entry containing source IP address 192.168.1.0/24 and destination IP address 192.168.2.0/24. Device configured with IP address 192.168.1.x will fail to access device 192.168.2.x. But device 192.168.2.x will be allowed to access device 192.168.1.x.

Tips: Configure one more deny ACL entry containing source IP address 192.168.2.0/24 and destination IP address 192.168.1.0/24. The two devices will be mutually unreachable.

ACL List

[+ Add](#)[Delete Selected](#)

☐	Username ?	Rule ?	Control Type ?	Effective Time ?	Src Networks	Dest Networks	Status	Effective Sta... ?

No Data

Up to 50 entries can be added.

Total 0 < 1 > 10/page

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 9-12 Access Control Rule Information

Parameter	Description
Username	Identify the purpose of the rule.
Rule	Display a summary of the control information. MAC-based: Display the MAC address matching the rule. IP-based: Display the connection type, source IP address, destination IP address, and protocol type of packets matching the rule.
Control Type	Indicate how packets that match the rule are processed. • Allow: Permit the packets that match the rule. • Block: Discard the packets that match the rule.
Effective Time	Indicate the time period during which the rule takes effect.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Src Networks	Indicate the source interface that matches the rule. If the rule is based on the MAC address, then this field is set to "All Intranets" by default. If the rule is based on IP addresses, then this field can be set to "All Networks", "All Extranets", "All Intranets", or a specific network.
Dest Networks	Indicate the destination interface that matches the rule. If the rule is based on the MAC address, then this field is set to "All Extranets" by default. If the rule is based on IP addresses, then this field can be set to "All Networks", "All Extranets", "All Intranets", or a specific network.
Status	Indicate whether the rule is enabled. You can click to switch the status. When this toggle switch is off, the rule will not take effect.
Effective State	Indicate whether the rule is effective. If Ineffective is displayed, it might be because the current system time is not within the designated effective period. You can hover the mouse over  to view more details on the cause.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Match Order	All the created rules are displayed in the ACL list, with the latest rule listed on the top. The device matches the rules according to their sorting in the list. You can manually adjust the rule matching sequence by clicking  or  in the list.
Action	You can modify or delete a rule.

1. Configuring a MAC Address-based ACL Rule

MAC address-based ACL rules enable the device to match data packets based on the source MAC address, and are generally used to control Internet access from online users or specific clients.

Set **Based on MAC**, enter the MAC address of the client, select a rule type, set the effective time range, and click **OK**.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Note

MAC address-based ACL rules are valid on WAN interfaces by default.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add Rule



Status ☒

Name

Based on ☒ MAC Address ☐ IP Address

* MAC Address

Control Type

Effective Time

Cancel

OK

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 9-13 MAC address-based ACL configuration

Parameter	Description
Status	Indicate whether the rule is enabled. You can click to switch the status. When this toggle switch is off, the rule will not take effect.
Name	Identify the rule. This field can be customized by the user.
MAC Address	Enter the target MAC address. When you click on the input box, the information of the user currently online will be displayed. By simply clicking on the displayed information, the corresponding MAC address will be automatically filled in for you.
Control Type	Indicate how packets that match the rule are processed. • Allow: Permit the packets that match the rule. • Block: Discard the packets that match the rule.

1 Configuration Guide

SD-WAN

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Effective Time	Indicate the time period during which the rule takes effect. You can select a time range from the drop-down list in 9.3 Time Management , or select Custom to manually set a time range.

2. Configuring an IP Address-based ACL Rule

IP address-based ACL rules enable the device to match data flows according to the source IP address, destination IP address, and protocol number.

Set **Based on IP**, click **IPv4** or **IPv6** next to the **Internet** parameter and enter the source IP address and port and destination IP address and port of the data flow, select the protocol type, rule type, effective time range, and effective port, and click **OK**.

Caution

- IP address-based ACL rules are effective in only one direction. For example, in a block rule, the source IP address segment is 192.168.1.0/24 and the destination IP address segment is 192.168.2.0/24. According

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

to this rule, the device with the IP address 192.168.1.x cannot access the device with the IP address 192.168.2.x, but the device with the IP address 192.168.2.x can access the device with the IP address 192.168.1.x. To block bidirectional access in this network segment, you need to configure another block rule with the source IP address segment 192.168.2.0/24 and destination IP address segment 192.168.1.0/24.

- L2TP/PPTP VPN supports only IP address-based access control and the effective ports must be in the LAN.
-

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add Rule



Status ☒

Name

Based on ☐ MAC Address ☒ IP Address

Internet ☒ IPv4 ☐ IPv6

Enable User Groups ☐

Src IP Address

Dest IP Address

Protocol Type

Control Type

Effective Time

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 9-14 IP address-based ACL configuration

Parameter	Description
Status	Indicate whether the rule is enabled. You can click to switch the status. When this toggle switch is off, the rule will not take effect.
Name	Identify the purpose of the rule, which can be customized by the user.
Internet	Format of the IP address. Both IPv4 and IPv6 address formats are supported.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Src IP Address: Port	The source IP address and port of the packet. If this parameter is left empty, it means all IP addresses and ports. If the Internet is set to IPv4, then the format of the IP address is IPv4. Example: 192.168.1.1/24. If the Internet is set to IPv6, then the format of the IP address is IPv6. Example: 2000::1.
Dest IP Address: Port	The destination address and port of the packet. If this parameter is left empty, it means all IP addresses and ports. If the Internet is set to IPv4, then the format of the IP address is IPv4. Example: 192.168.1.1/24 If the Internet is set to IPv6, then the format of the IP address is IPv6. Example: 2000::1

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Protocol Type	Specify the protocol type for data packet matching. The options are TCP, UDP, and ICMP.
Control Type	Specify the method for processing data packets matching the conditions. Allow: Permit the data packets matching the conditions. Block: Drop the data packets matching the conditions. This rule is valid only in one direction, and does not block the reverse flow.
Effective Time	You can select a time range defined in Section 9.3 Time Management from the drop-down list box, or select Custom and manually enter the specific time range.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Interface	Select the port on which the rule applies. LAN: The rule takes effect on a LAN port to control data packets to the LAN. WAN: The rule takes effect on a WAN interface to control data packets received from or sent to the Internet.
Src Networks	Indicate the source interface that matches the rule. If the rule is based on the MAC address, then this field is set to "All Intranets" by default. If the rule is based on IP addresses, then this field can be set to "All Networks", "All Extranets", "All Intranets", or a specific network.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Dest Networks	Indicate the destination interface that matches the rule. If the rule is based on the MAC address, then this field is set to "All Extranets" by default. If the rule is based on IP addresses, then this field can be set to "All Networks", "All Extranets", "All Intranets", or a specific network.

To limit the session state of packets matching the rule, you can click **Advanced Settings** and select one or more session states as required. These session states include New, Established, Related, and Invalid. Then, click **OK**.

i Note

If no session state is selected, the rule matches all sessions by default.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

----- Advanced Settings -----

* Session State ☒ All

☒ New ☐ Established ☐ Related

☒ Invalid

Cancel

OK

9.8 Clients Management

9.8.1 Managing Online Clients

The **Client List** page displays client information. You can create client groups based on identified client information.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Choose **One-Device > Gateway > Config > Behavior > Clients Management**.

The details of the client list are displayed.

Enable ☒

All (7) Other (7)

IP Address/MAC Address

+ Create Group

+ Move to Group

☐ Delete Selected

Client Location Update

☐	Status	Device Name	Type	IP Address	MAC Address	Access Location	Online Time	Action
☐	Online	RG-ES218GC-P	Network Device	192.168.2.4		9 AG	2023-12-07 20:15:00	View Details & Edit Delete
☐	Online	RAP2261(G)	Network Device	192.168.2.5		4 port 13	2023-12-07 21:20:22	View Details & Edit Delete
☐	Offline	test		0.0.0.0	0		2023-12-05 16:33:26	View Details & Edit Delete
☐	Offline	NBS60021	Network Device	192.168.2.3	00:00:00:00:00:01	9 AG	2023-12-04 16:12:50	View Details & Edit Delete
☐	Offline	111		0.0.0.0	0		2023-12-04 15:37:31	View Details & Edit Delete
☐	Online	M2102J25C	Mobile Terminal	192.168.2.8		1 port 13	2023-12-11 18:45:11	View Details & Edit Delete
☐	Online	DESKTOP-PJE70H1	PC	192.168.2.2	f	9 LAN0	2023-12-06 21:32:34	View Details & Edit Delete

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

1. Viewing and Editing Client Information

Choose **One-Device > Gateway > Config > Behavior > Clients Management > Client List**.

- (1) Select the client to view details on the **Client List** page.
- (2) Click **View Details & Edit**. The system displays details of the client.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Edit Client

IP Address:	192.168.2.8	Access Device:	ruijie
MAC Address:	8	Access Location:	Cloud Managed J4/port 13
Online Time:	2023-12-11 18:45:11	Manufacturer:	
Offline Time:	-	Product:	
Wireless:	Yes		
* Client Name:	M2102J2SC	Client Type:	Mobile Terminal
Automatic Grouping:	Yes	Client Group:	other

Cancel

OK

- (3) Edit client information as required.

- **Client Name:** indicates the client name.
- **Client Type:** indicates the client type.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- o **Automatic Grouping:** indicates automatic client grouping.
 - o **Client Group:** indicates the client group.
- (4) Click **Save**.

2. Creating a Client Group

You can create a client group to manage multiple clients uniformly.

Choose **One-Device > Gateway > Config > Behavior > Clients Management > Client List**.

- (1) Select the clients to be grouped in **Client List** and click **Create Group**.

All (7)Other (7)

IP Address/MAC Address:

+ Create Group

+ Move to Group

Delete Selected

Client Location Update

☐	Status	Device Name	Type	IP Address	MAC Address	Access Location	Online Time	Action
☒	Online	RG-ES218GC-P	Network Device	192.168.2.4	80:00:00:00:00:00	10.10.10.10 AG	2023-12-07 20:15:00	View Details & Edit Delete
☐	Online	RAP2261(G)	Network Device	192.168.2.5	c0:00:00:00:00:00	C/00:00:00:00:00:00 port 13	2023-12-07 21:20:22	View Details & Edit Delete

- (2) The system identifies client rules automatically.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Create Group



* Group Name

Client List 80:

Auto add other client to the group. ☐

Auto Recognition Rule [View the client matching the rule.](#)

☒ oui: 80:05:88

☒ Type: Network Device

☒ hostname: RG-ES218GC-P

Cancel

OK

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (3) Set a group name.
- (4) (Optional) Enable **Auto add other client to the group** to add other clients in **Client List** to the group.
- (5) (Optional) Click **View the client matching the rule** to view the client list where all clients match the same rule based on **oui**, **type**, or **hostname**.
- (6) Click **Save** to create a client group.

3. Moving a Client to Another Group

Choose **One-Device > Gateway > Config > Behavior > Clients Management > Client List**.

- (1) Select the clients to be moved to another group and click **Move to Group**.
- (2) Select a group from the **Group Name** drop-down list box to move the clients to the group.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Move to Group



* Group Name

Select



Cancel

OK

9.8.2 Managing Client Groups

Choose **One-Device > Gateway > Config > Behavior > Clients Management > Client Group Config**.

You can specify client rules manually to create a client group and modify attributes of the client group.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Client Group				+ Add Group	Delete Selected
☐	Clients	Auto Clustering	Clustering Rule	Action	
☐	test	No	oui:80:05:88 Type:Network Device hostname:RG-ES218GC-P	Edit Delete	
				Total 1	1 10/page

1. Creating a Client Group

- (1) Click **Add Group**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add Client Group



* Group Name

Auto add other client to the group. ☐

Auto Recognition Rule [View the client matching the rule.](#)

Add Rule

Cancel

OK

- (2) Configure **Group Name**.
- (3) Click **Add Rule** to create a client rule.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add Rule

Rule Type

oui

* Rule Content

Rule Content

Cancel

OK

The system supports the following three types of rules.

- o **oui:** indicates that the first three bytes of a MAC address is used as a grouping rule, such as 70:B5:E8.
- o **Type:** indicates that the client type is used as a grouping rule. The client types include computers, mobile terminals, cameras, printers, servers, network devices, and monitors.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede22ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- o **hostname:** indicates that the hostname of a device is used as a grouping rule, such as DESKTOP-PJE70H1.
- (4) Select at least one new rule.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add Client Group



* Group Name

Server

Auto add other client to the group. ☒

Auto Recognition Rule [View the client matching the rule.](#)

☒ Type:Server

Add Rule

Cancel

OK

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (5) (Optional) Click **View the client matching the rule** to view the client list where all clients match the same rule based on **oui**, **type**, or **hostname**.
- (6) (Optional) Enable **Auto add other client to the group** to add other clients in **Client List** to the group.
- (7) Click **OK**.

2. Editing Client Group Information

- (1) Select the client group to be edited in **Client Group** and click **Edit**.

Client Group				+ Add Group Delete Selected	
☐	Clients	Auto Clustering	Clustering Rule	Action	
☐	test	No	oui:80:05:88 Type:Network Device hostname:RG-ES218GC-P	Edit	Delete
☐	Server	Yes	Type:Server	Edit	Delete
Total 2 < 1 > 10/page ▼					

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (2) Configure grouping rules. Uncheck a rule or add a new rule.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Edit Client Group

* Group Name

test

Auto add other client to the group. ☐

Auto Recognition Rule [View the client matching the rule.](#)

☒ oui:80:05:88

☒ Type:Network Device

☐ hostname:RG-ES218GC-P

Add Rule

Cancel

OK

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (3) Click **OK**.

9.8.3 Upgrading a Client Application Library

Choose **One-Device > Gateway > Config > Behavior > Clients Management > Client Library Upgrade**.

Upload an application library upgrade file manually to upgrade a client application library.

Note

You can upgrade a client application library only when the device flash space and memory space are sufficient.

Current Version OUI Application Library:2022.11.25 Rule Application Library:2022.11.25

File Path

Please select a file.

Browse

Upload

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (1) Click **Browse** to select an application library upgrade file.
- (2) Click **Upload** to upload the application library upgrade file. Then the system upgrades the application library automatically.

9.9 Upgrading the Application Library

9.9.1 Overview

The app control function relies on the accuracy of the application library, and the application library is updated with the app version. You can upgrade the application library to the latest version on the **Application Library Update** page.

9.9.2 Local Upgrade

Choose **One-Device > Gateway > Config > Behavior > Application Library Update > Local Application Library Update**.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Caution

- Upgrading the application library version takes about one minute to take effect. Do not cut off power during the upgrade. You can view the current application library version on the page.
 - Perform subsequent operations based on the memory information displayed on the page. If the memory is insufficient, you are advised to restart the device and then upgrade the application library.
 - After the application library is upgraded, the original app control policy may become invalid. Therefore, exercise caution when performing this operation.
-

- (1) Click **Browse**. Select an application library upgrade file.
- (2) Click **Upload** to upload the upgrade file.
- (3) Click **OK**. Wait for the system to automatically complete the upgrade.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Current Version 2023.12.01.23.12.01(V2.0)

File Path

Please select a file.

Browse

Upload

9.9.3 Online Upgrade

Choose **One-Device > Gateway > Config > Behavior > Application Library Management > Application Library Management**.

Enable **Auto Update Version**. When the system identifies the latest version, the application library is automatically upgraded.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Auto Update Version 

Application Recognition 2023.12.01.23.12.01(V2.0) New version is not found. Please check the network connection.

Library

9.10 Network Behavior Settings

9.10.1 Internet Alert

Choose **One-Device > Gateway > Config > Behavior > Network Settings > Internet Alert**.

Click **Add** to create a network access notification policy and notify users of their online behaviors or application usage.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

1.VPN connections are not supported. 2.The Alerts and Notifications feature is not supported on PPPoE clients.

Notification List

[+ Add](#)[Delete Selected](#)

☐	User Group	Notification Type	Status	Action
☐	Authentication Group	Network Activity Notification; App Use Notification: Game	Enable ☺	Edit Delete
☐	VPN Group	App Use Notification: Video	Enable ☺	Edit Delete
☐	User Group/3dbbuser Unknown	Network Activity Notification;	Enable ☺	Edit Delete
☐	User Group/c3f4user Unknown	Network Activity Notification;	Enable ☺	Edit Delete

Up to 20 entries can be added.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

* User Group (?)

App Alert (?) ☐ Select All

☐ Game ☐ Video ☐ Payment

Data Usage Alert ☐

Status ☐

Cancel

OK

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 9-15 Internet Access Notification Configuration Parameters

Parameter	Description
User group	Select a user group managed by the policy from the user group list. For details about how to set the user group list, see Section 9.2 User Management . If you select all members of a user group, the policy takes effect on the entire user group (and members added to the user group later).
App Alert	To enable the App Alert function, enable Traffic Audit first. For details, see Section 3.4 Supporting Traffic Monitoring .
App category	When App Alert is enabled, you need to select the application category for the policy. When a user uses an application in the corresponding application category, a notification will be received.
Data Usage Alert	After the Data Usage Alert function is enabled, you will receive a notification when a specified user accesses the Internet.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Status	Enable/disable the Data Usage Alert function. If it is disabled, the policy does not take effect.

9.10.2 Online Time Control

Note

The **Online Time Control** feature can only be configured on the app, and the web interface only displays the synchronization status.

Choose **One-Device > Gateway > Config > Behavior > Network Settings > Online Time Control**.

The **Online Time Control** list displays the type, schedule, accounting status, status, and operation information.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Online Time Control

Type	Schedule	Accounting Status	Status	Action
No Data				

9.10.3 Internet Block Policy

Note

The Internet block policy can be configured only on the app, and the web interface only displays the synchronization status.

Choose **One-Device > Gateway > Config > Behavior > Network Settings > Internet Block Policy**.

The **Policy List** displays the user group, start time of network disconnection, end time of network disconnection, start time of temporary access, and end time of temporary access.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Policy List

User Group	Start Time	End Time ?	Temporary Access Start Time	Temporary Access End Time ?

No Data

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

10 Online Client Management

10.1 Overview

Choose **Network-Wide > Clients**.

The client list displays wired, wireless, and users not connected on the current network, including the username, connection mode, associated device, IP/MAC address, IP address binding status, rate, and related operations.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

All (5)

Wired (2)

Wireless (3)

User not connected (0)

Select

Block

Bind IP

Search by IP/MAC/Username

The client going offline will not disappear immediately. Instead, the client will stay in the list for 3 more minutes.

Username	SSID and Band	Connected To	IP/MAC		Rate	Action
Click to edit	5G @@@@zzzzzzzzzz	AP W	192.168.110.6 1	Not bound	0.00bps 0.00bps	Access Control Associate Block
M2102J2SC	5G @@@@zzzzzzzzzz	AP W	192.168.110.7 E	Not bound	571.00bps 1.35Kbps	Access Control Associate Block
DESKTOP-DTTUM8V	Wired LAN3/WAN1	eg205g M	192.168.110.9 7	Not bound	0.00bps 475.00bps	Access Control
DESKTOP-IPV6G6R	Wired LAN1/WAN3	eg205g I	192.168.110.14 c	Not bound	295.54Kbps 79.64Kbps	Access Control
zhuyihan	2.4G @@@@zzzzzzzzzz	AP W	192.168.110.16 0C	Not bound	132.00bps 43.00bps	Access Control Associate Block

Total 5

1

10/page

- Click **Not Bound** in the **IP/MAC** column to bind the client to a static IP address.
- Click a button in the **Action** column to perform the corresponding operation on the online client.
 - Wired: Only access control can be configured.

1 Configuration Guide

SD-WAN

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- o Wireless: Access control, associate, and block can be configured.

Table 10-1 Online Client Management Configuration Parameters

Parameter	Description
Username	Name of the connected client.
SSID and Band	Indicates the access mode of the client, which can be wireless or wired. The SSID and frequency band is displayed when a client is connected wirelessly.
Connected To	Indicates wired or wireless connection, the associated device and SN.
IP/MAC	Indicates the IP address and MAC address of the client.
Rate	Indicates the uplink and downlink rates of the client.
Action	You can click the corresponding button to perform access control, association, and block operations on online clients.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Signal Quality	The Wi-Fi signal strength of the client and the associated channel. Note: This information is displayed only in the wireless online client list.
Negotiation Rate	Negotiation rate between the client and the AP. Note: This information is displayed only in the wireless online client list.
Online Duration	Online duration of the client. Note: This information is displayed only in the wireless online client list.
Limit Speed	Indicates the wireless rate limiting of the current client. For details, see Section 10.6 Configuring Client Rate Limiting . Note: This information is displayed only in the wireless online client list.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

1. Wired Clients

Click the **Wired** tab to see details about wired clients.

All (24)	Wired (23)	Wireless (1)	User not connected (6)	Refresh	Select	Block	Bind IP	Search by IP/MAC/Username
The client going offline will not disappear immediately. Instead, the client will stay in the list for 3 more minutes.								
Username	SSID and Band	Connected To	IP/MAC		Rate	Action		
Click to edit	Wired Gi1/18	NBS6000	192.168.120.1	Not bound	↑ 0.00bps ↓ 0.00bps	Access Control		
PC-4277ac	Wired Gi1/21	NBS6000	192.168.110.3	Bound	↑ 40.18Kbps ↓ 21.28Kbps	Access Control		

2. Wireless Clients

Click the **Wireless** tab to see details about wireless clients.

SD-WAN

This feature can only be configured in Ruijie Cloud.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- ## System Management

3. User not connected

Click the **User not connected** tab to see details about clients waiting to connect. This list includes clients tagged manually or recognized as devices previously connected to the network but not currently listed in device management or online client lists. To remove a client device, click **Delete**.

All (24)
Wired (23)
Wireless (1)

User not connected (6)

↻

Bind IP

! The client going offline will not disappear immediately. Instead, the client will stay in the list for 3 more minutes.

Username	MAC Address	Action
00:11:22:33:44:55 🔗	00:11:22:33:44:55	Delete
00:11:22:33:44:66 🔗	00:11:22:33:44:66	Delete

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

10.2 Configuring Client IP Binding

Choose **Network-Wide > Clients**.

IP address binding is a security and access control policy that associates a specific IP address with a specific device or user to achieve identity authentication, access control, monitoring, and accounting.

- Single client IP address binding

Select the client to be bound with an IP address in the list, click **Not bound**, and click **OK** in the pop-up box to bind the client to a static IP address.

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:


- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

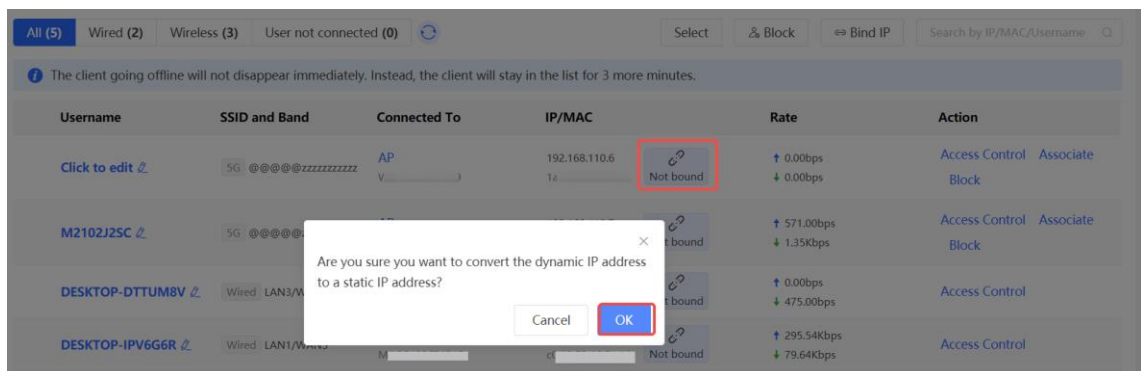

- Batch IP binding

Click **Select**.



1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Select the clients to be bound, click **Bind IP**, and click **OK** in the pop-up box to bind the selected clients to a static IP address.

All (5)Wired (2)Wireless (3)User not connected (0)

Deselect

Block

Bind IP

Search by IP/MAC/Username

The client going offline will not disappear immediately. Instead, the client will stay in the list for 3 more minutes.

	Username	SSID and Band	Connected To	IP/MAC	Rate	Action
☒	Click to edit	5G @@@@@zzzzzzzzzz	AP 9	192.168.110.6 1	Not bound ↑ 0.00bps ↓ 0.00bps	Access Control Associate Block
☒	M2102J25C	5G @@@@@zzzzzzzzzz	AP 9	192.168.110.7 8	Not bound ↑ 571.00bps ↓ 1.35Kbps	Access Control Associate Block
☒	DESKTOP-DTTUM8V	Wired LAN3/WAN1	eg205g 15	192.168.110.9 7C	Not bound ↑ 0.00bps ↓ 475.00bps	Access Control

● Unbind IP address

Select the client to be unbound from the list, click **Bound**, and click **OK** in the pop-up box.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

All (5)	Wired (2)	Wireless (3)	User not connected (0)		Deselect	Block	Bind IP	Search by IP/MAC/Username
The client going offline will not disappear immediately. Instead, the client will stay in the list for 3 more minutes.								
	Username	SSID and Band	Connected To	IP/MAC		Rate	Action	
☒	Click to edit	5G @@@@@zzzzzzzzzz	AP 9	192.168.110.6 1a:zzzzzzzzzzzzzzzz	Bound	↑ 0.00bps ↓ 0.00bps	Access Control	Associate Block

10.3 Configuring Client Access Control

Choose **Network-Wide > Clients**.

Select a client in the list and click **Access Control** in the **Action** column. You will be redirected to the **Edit Rule** page, where a MAC-based access control rule is automatically generated. The name and MAC address are automatically generated based on the selected client. After selecting the control type and effective time, click **OK** to create an access control rule for the client. For details, see Section [Configuring a MAC Address-based ACL Rule](#).

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Edit Rule



Status ☒

Name

Based on ☒ MAC Address ☐ IP Address

* MAC Address

Control Type

Effective Time

Cancel

OK

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

10.4 Configuring Client Association

Choose **Network-Wide > Clients**.

Note

The Client Association feature applies only to wireless clients.

Select a client in the list and click **Associate** in the **Action** column. You will be redirected to the **Edit Association** page. The **Client** field is populated with the MAC address of the selected client and cannot be modified. The **Associated Device** field is populated with the associated device of the client by default. Set the SSID and the Forced Association feature as required, and click **OK**. For details, see Section [5.12 Client Association](#).

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

All (4)	Wired (1)	Wireless (3)	User not connected (0)	Refresh	Select	Block	Bind IP	Search by IP/MAC/Username
The client going offline will not disappear immediately. Instead, the client will stay in the list for 3 more minutes.								
Username	SSID and Band	Connected To	IP/MAC		Rate	Action		
* ?	5G @@@@ZZZZZZZZ	AP V 9	192.168.110.6 1: 3	Not bound	↑ 0.00bps ↓ 0.00bps	Access Control	Associate	
M2102J25C ?	5G @@@@ZZZZZZZZ	AP V 1	192.168.110.7 8 4	Not bound	↑ 2.95Kbps ↓ 5.79Kbps	Access Control	Associate	

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Edit Association



* Client

* Associated Device

Advanced Settings

SSID

Forced Association ☐

Enabling this feature will forcefully associate the client with a specific AP. However, since the client cannot initiate automatic association, this may cause disconnection and unsuccessful association attempts.

Cancel

OK

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

10.5 Blocking Clients

Choose **Network-Wide > Clients**.

An unauthorized client may occupy network bandwidth and pose security risks. You can block specified clients to solve the unauthorized access problem.

Note

Client Block is available only for wireless clients.

- Block a single client

Select a client to block in the list, click **Block** in the **Action** column, and click **OK** in the pop-up box to block the selected client.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

All (4)	Wired (1)	Wireless (3)	User not connected (0)	↻	Select	⛔ Block	⇄ Bind IP	Search by IP/MAC/Username 🔍
ⓘ The client going offline will not disappear immediately. Instead, the client will stay in the list for 3 more minutes.								
Username	SSID and Band	Connected To	IP/MAC		Rate	Action		
* 2	5G @@@@zzzzzzzzzz	AP V1	192.168.110.6 1:2	Not bound	↑ 0.00bps ↓ 0.00bps	Access Control	Associate	Block
M2102J2SC 2	5G @@@@zzzzzzzzzz	AP V1	192.168.110.7 8:4	Not bound	↑ 2.95kbps ↓ 5.79kbps	Access Control	Associate	Block

Do you want to add 1a to the blocklist?

Cancel

OK

- Batch block clients

Click **Select**.

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.


Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management



Select the target clients, click **Block**, and click **OK** in the pop-up box to block the selected clients.

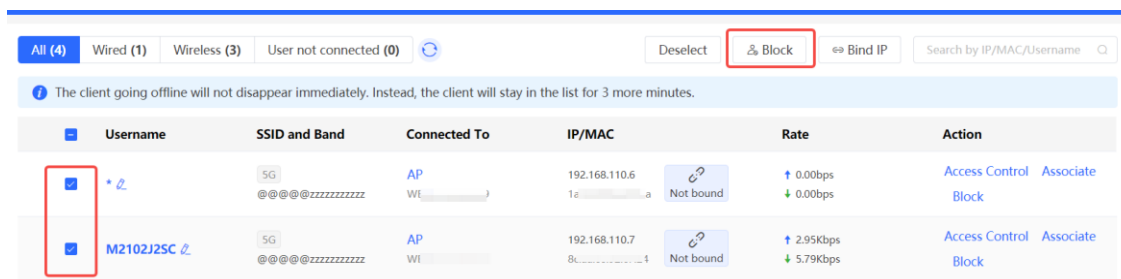

● Cancel Block

Choose **Network-Wide > Workspace > Wireless > Blocklist/Allowlist > Global Blocklist/Allowlist**.

Select the client to be removed from the blocklist in the wireless blocklist and click **Delete**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

[Global Blocklist/Allowlist](#) [SSID-Based Blocklist/Allowlist](#)

☒ All STAs except blocklisted STAs are allowed to access Wi-Fi. ☐ Only the allowlisted STAs are allowed to access Wi-Fi.

Blocked WLAN Clients [+ Add](#) [Delete Selected](#)

	Device Name	MAC Address	Action
☐	M2102J2SC 🔗	8: _____ f	Edit Delete

Up to 512 members can be added. Total 1 < 1 > 10/page

10.6 Configuring Client Rate Limiting

Choose **Network-Wide > Clients > Wireless**.

To ensure fair resource allocation, the network administrator can implement wireless rate limiting to prevent some users or devices from occupying a large amount of bandwidth and affecting the network experience of other users.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

i Note

Rate limiting applies only to wireless clients.

- Configure rate limits for clients

Click the **Wireless** tab, click the **LimitSpeed** column in the table, set the uplink rate limit and downlink rate limit, and click **OK**.

All (4)	Wired (1)	Wireless (3)	User not connected (0)		Select	& Block	⇌ Bind IP	Search by IP/MAC/Username	
The client going offline will not disappear immediately. Instead, the client will stay in the list for 3 more minutes.									
Username	SSID and Band	Signal Quality	Connected To	IP/MAC	Rate	Negotiation Rate	Online Duration	LimitSpeed	Action
*	5G ①①①①①zzzzzzzzzz	-42db Channel:149	AP 89	192.168.110.6 1:1:1:1:1:1:1:1	 ↑ 0.00bps ↓ 0.00bps	866M	44 minutes 47 seconds	No Limit	Access Control Associate Block
M2102J25C	5G ①①①①①zzzzzzzzzz	-33db Channel:149	AP W	192.168.110.7 8:1:1:1:1:1:1:1	 ↑ 1.20Kbps ↓ 5.90Kbps	585M	8 seconds	No Limit	Access Control Associate Block

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

LimitSpeed



Uplink Rate

No Limit by Default. R

Kbps



Limit Current: Kbps. Range: 1-1700000 Kbps

Downlink Rate

No Limit by Default. R

Kbps



Limit Current: Kbps. Range: 1-1700000 Kbps

Disable

Cancel

OK

- Cancel rate limits

Click the **Wireless** tab, click the **LimitSpeed** column in the table, and click **Disable**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

All (4)

Wired (1)

Wireless (3)

User not connected (0)

Select

Block

Bind IP

Search by IP/MAC/Username

The client going offline will not disappear immediately. Instead, the client will stay in the list for 3 more minutes.

Username	SSID and Band	Signal Quality	Connected To	IP/MAC	Rate	Negotiation Rate	Online Duration	LimitSpeed	Action
*	5G @@@@zxxxxxxxxx	-42db Channel:149	AP 	192.168.110.6 1:xxxxxxxxxx	Net bound ↑ 0.00bps ↓ 0.00bps	866M	44 minutes 47 seconds	↑ 100Mbps ↓ 100Mbps	Access Control Associate Block
M2102J25C	5G @@@@zxxxxxxxxx	-33db Channel:149	AP 	192.168.110.7 E:xxxxxxxxxx	Net bound ↑ 1.20Kbps ↓ 5.90Kbps	585M	8 seconds	No Limit	Access Control Associate Block

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

LimitSpeed



Uplink Rate Mbps ▾

Limit Current: **102400** Kbps. Range: 1-1700000 Kbps

Downlink Rate Mbps ▾

Limit Current: **102400** Kbps. Range: 1-1700000 Kbps

Disable

Cancel

OK

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

11 VPN

11.1 Configuring IPsec VPN

11.1.1 Overview

1. IPsec Overview

IP Security (IPsec) is a Layer 3 tunnel encryption protocol defined by the IETF. IPsec is used to provide end-to-end encryption and verification services in the network to provide high quality and interoperability for data transmission over the network and ensure transmission security by using cryptographic algorithms. The communicating parties obtain the following security services at the IP layer through encryption and data source authentication:

- Confidentiality: The IPsec sender encrypts packets before transmitting the packets over the network.
- Data integrity: The IPsec receiver authenticates packets received from the sender to ensure that data is not

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

tampered with during the transmission.

- Data authentication: The IPsec receiver authenticates whether the sender of IPsec packets is valid.
- Anti-replay: The IPsec receiver detects and denies expired or repeated packets.

The IPsec protocol is widely used for communication between the HQ and branches of an organization. Currently, the device can be deployed as the IPsec server or client. A secure tunnel is established between the HQ and each branch based on the IPsec protocol to ensure the confidentiality of data transmission and improve network security.

2. IKE Overview

IPsec provides secure communication between two endpoints, which are called IPsec peers. Security Association (SA) is the establishment of shared security attributes between the peers to support secure communication. An SA may include attributes such as: security protocol used by the peers, characteristics of data flows to be protected, encapsulation mode of data transmitted between the peers, encryption and authentication algorithms, keys for secure data conversion and transmission, and the SA lifetime. When you configure IPsec, you can use the Internet Key Exchange (IKE) protocol to establish an SA. IKE provides automatically negotiated keys for establishing and maintaining SAs, simplifying IPsec usage and management.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

3. IPsec Security Policy

IPsec security policies define security proposals (equivalent to SA) for data flows. You can configure matching security policies on both parties engaged in the communication to establish IPsec tunnels between the IPsec client and the IPsec server, protecting the communication data. An IPsec security policy consists of two parts: basic settings and advanced settings. Advanced settings are optional and include the specific IKE policy and connection policy. You can keep the default settings unless otherwise specified. For details, see the configuration steps below.

11.1.2 Configuring the IPsec Server

Choose **One-Device > Gateway > Config > VPN > IPsec > IPsec Security Policy**.

1. Basic Settings

Click **Add**. In the dialog box that appears, set **Policy Type** to **Server**, enter the policy name and local subnet range, set the pre-shared key, and click **OK**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Note: Example: IP address/number of subnet mask bits.

Tips: If it is set to 192.168.110.x/24, the address range is from 192.168.110.1 to 192.168.110.254.

- Up to 3 entries with the policy type of client can be configured.
- Up to 1 entry with the policy type of server can be configured.
- The server and client cannot be configured at the same time.

Policy List

[+ Add](#)

Policy Type ?	Policy Name ?	Peer Gateway ?	Key Exchange Version	Local Subnet ?	Peer Subnet ?	Status	Action
Client	test	10.52.50.239	IKEv1	192.168.2.0/24	192.168.68.0/24	Enable ☺	Edit Delete

Total 1 < 1 > 10/page ▾

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

 If clients want to access from different WAN ports, please set Local ID Type to Name. Otherwise, all clients will access from the same one WAN port.

Policy Type  ☐ Client ☒ **Server**

Internet  ☒ **IPv4** ☐ IPv6

* Policy Name 

Interface 

Key Exchange Version ☒ **IKEv1** ☐ IKEv2



* Subnets

+ Local Subnets

* Pre-shared Key 

Status ☒

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-1 IPsec server basic settings

Parameter	Description
Policy Name	Specify the name of the IPsec security policy. The name must be a string of 1 to 28 characters.
Internet	Format of the IP address. Both IPv4 and IPv6 address formats are supported.
Interface	Select a local WAN interface from the drop-down list box. The Peer Gateway parameter set for the communication peer (IPsec client) must use the IP address of the WAN interface specified here. In the multi-line scenario, you are advised to set this parameter to Auto .

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Key Exchange Version	Select the IKE version for SA negotiation. There are two options available: ● IKEv1: The negotiation of SA in IKEv1 primarily consists of two phases. ○ Phase 1: The purpose is to establish an IKE SA using one of two negotiation modes: Main Mode and Aggressive Mode. Main Mode requires six ISAKMP (Internet Security Association and Key Management Protocol) messages to complete the negotiation, while Aggressive Mode only requires three ISAKMP messages. Aggressive Mode offers faster IKE SA establishment. However, it combines key exchange and identity authentication, which means it does not provide identity protection. ○ Phase 2: The purpose is to establish an IPsec SA for data transmission, utilizing a fast exchange mode that requires only three ISAKMP messages to complete the negotiation. ● IKEv2: In IKEv2, the negotiation process for SA is simplified. The establishment of one IKE SA and one pair of IPsec SAs can be accomplished using two exchanges with four messages. If there is a need to establish more than one pair of IPsec SAs, only one additional exchange is needed for each pair. This enables the negotiation to be completed with

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
	just two messages per pair.
Subnets	Specify the local subnet address range for the data flows to be protected, that is, the LAN port network segment of the server. The value is the combination of IP address and subnet mask.
Pre-shared Key	Specify the same pre-shared key as the credential for authentication between communicating parties. For higher security, different peers must be configured with different pre-shared keys. That is, a pair of interface bound to the IPsec server and peer gateway of the IPsec client must be configured with the same unique pre-shared key.
Status	Specify whether to enable the security policy.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

2. Advanced Settings (Phase 1)

- The key exchange version in the basic setting is IKEv1:
Click **1. Set IKE Policy** to expand the configuration items. Keep the default settings unless otherwise specified.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

1. Set IKE Policy

Authentication-Encryption-DH Group

IKE Policy 1	sha1-3des-dh1
IKE Policy 2	sha1-des-dh1
IKE Policy 3	sha1-3des-dh2
IKE Policy 4	md5-des-dh1
IKE Policy 5	md5-3des-dh2

Negotiation Mode ☒ Main Mode ☐ Aggressive Mode

Local ID Type ☒ IP ☐ Name

Peer ID Type ☒ IP ☐ Name

* Lifetime

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- The key exchange version in the basic setting is IKEv2:
Click **IKE Policy** to expand the configuration items. Keep the default settings unless otherwise specified.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

IKE Policy

Authentication-Encryption-DH Group

IKE Policy 1	sha1-3des-dh1	▼
IKE Policy 2	sha1-des-dh1	▼
IKE Policy 3	sha1-3des-dh2	▼
IKE Policy 4	md5-des-dh1	▼
IKE Policy 5	md5-3des-dh2	▼

Local ID Type ☒ IP ☐ Name

Peer ID Type ☒ IP ☐ Name

* Lifetime

DPD ☒ Enable ☐ Disable

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-2 IPsec server IKE policy configuration

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

IKE Policy	Select the hash algorithm, encryption algorithm, and Diffie-Hellman (DH) group ID used by the IKE protocol. An IKE policy is composed of the three parameters. You can set five sets of IKE policies. To ensure successful IKE negotiation, the two parties engaged in IKE negotiation must have at least one set of consistent IKE policy. ● Hash algorithm: ○ sha1: SHA-1 algorithm ○ md5: MD5 algorithm ● Encryption algorithm: ○ des: DES algorithm using 56-bit keys ○ 3des: 3DES algorithm using 168-bit keys ○ aes-128: AES algorithm using 128-bit keys ○ aes-192: AES algorithm using 192-bit keys ○ aes-256: AES algorithm using 256-bit keys ● DH group ID: ○ dh1: 768-bit DH group ○ dh2: 1024-bit DH group ○ dh5: 1536-bit DH group

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Negotiation Mode	Select Main Mode or Aggressive Mode. The negotiation mode on the IPsec server and IPsec client must be the same. ● Main Mode: Generally, this mode is applicable to communication between fixed public network IP addresses and point-to-point communication between devices. In this mode, the peer identity is authenticated to provide high security. ● Aggressive Mode: The public network IP addresses obtained by ADSL dial-up users are not fixed and an NAT device may exist. Therefore, the aggressive mode is used to implement NAT traversal. In this mode, you need to set the local and peer ID type to NAME as the IP address is not fixed. The aggressive mode does not authenticate the peer identity, so it has low security.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Local/Peer ID Type	Specify the ID type of the local or peer device. The local ID type of the peer device must be the same as the peer ID type of the local device. ● IP: The IP address is used as the identity ID. The IDs of the local and peer devices are generated automatically. ● NAME: The host character string is used as the identity ID. The IDs of the local and peer devices are generated automatically. When the IP address is not fixed, you need to set Local ID Type to NAME and modify the peer device settings accordingly. In this case, you also need to configure the host character string that is used as the identity ID.
Local/Peer ID	When the local or peer ID type is set to NAME, you also need to host character string that is used as the identity ID. The local ID of the peer device must be the same as peer ID of the local device.
Lifetime	Specify the lifetime of the IKE SA. (The negotiated IKE SA lifetime prevails.) You are advised to use the default value.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
DPD	Specify whether to enable Dead Peer Detection (DPD) to detect the IPsec neighbor status. After DPD is enabled, if the receiver does not receive IPsec encrypted packets from the peer within the DPD detection interval, DPD query will be triggered and the receiver actively sends a request packet to detect whether the IKE peer exists. You are advised to configure DPD when links are unstable.
DPD Interval	Specify the DPD detection interval. That is, the interval for triggering DPD query. You are advised to keep the default setting.

3. Advanced Settings (Phase 2)

Click **Connection Policy** to expand the configuration items. Keep the default settings unless otherwise specified.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

----- Connection Policy -----

Protocol Type-Authentication-Encryption

Transform 1

Transform 2

Perfect Forward

Secrecy

* Lifetime

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-3 IPsec server connection policy configuration

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Transform Set	Specify the set of security protocol and algorithms. During IPsec SA negotiation, the two parties use the same transform set to protect specific data flow. The transform set on the IPsec server and IPsec client must be the same. ● Security protocol: The Encapsulating Security Payload (ESP) protocol provides data source authentication, data integrity check, and anti-replay functions for IPsec connections and guarantees data confidentiality. ● Verification algorithm: ○ sha1: SHA-1 HMAC ○ md5: MD5 HMAC ● Encryption algorithm: ○ des: DES algorithm using 56-bit keys ○ 3des: 3DES algorithm using 168-bit keys ○ aes-128: AES algorithm using 128-bit keys ○ aes-192: AES algorithm using 192-bit keys ○ aes-256: AES algorithm using 256-bit keys

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Perfect Forward Secrecy	Perfect Forward Secrecy (PFS) is a security feature that can guarantee the security of other keys when one key is cracked, because there is no derivative relationship among the keys. After PFS is enabled, temporary private key exchange is performed when an IKE negotiation is initiated using a security policy. If PFS is configured on the local device, it must also be configured on the peer device that initiates negotiation and the DH group specified on the local and peer devices must be the same. Otherwise, negotiation will fail. ● none: Disable PFS. ● d1: 768-bit DH group ● d2: 1024-bit DH group ● d5: 1536-bit DH group By default, PFS is disabled.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Lifetime	Indicates the duration of an IPsec tunnel, which defines the time for data transmission over the IPsec tunnel.

11.1.3 Configuring the IPsec Client

Choose **One-Device > Gateway > Config > VPN > IPsec > IPsec Security Policy**.

Click **Add**. In the dialog box that appears, set **Policy Type** to **Client**, enter the policy name, peer gateway, local subnet range, and peer subnet range, set the pre-shared key, and click **OK**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Note: Example: IP address/number of subnet mask bits.

Tips: If it is set to 192.168.110.x/24, the address range is from 192.168.110.1 to 192.168.110.254.

Up to 3 entries with the policy type of client can be configured.

Up to 1 entry with the policy type of server can be configured.

The server and client cannot be configured at the same time.

Policy List

+ Add

Policy Type ?	Policy Name ?	Peer Gateway ?	Key Exchange Version	Local Subnet ?	Peer Subnet ?	Status	Action

No Data

Total 0 < 1 > 10/page

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add



Policy Type (?) ☒ Client ☐ Server

Internet (?) ☒ IPv4 ☐ IPv6

* Policy Name (?)

* Peer Gateway (?) +

Interface (?) ▾

Key Exchange Version ☒ IKEv1 ☐ IKEv2



* Subnets

Local Subnets



Peer Subnets

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-4 IPsec client basic settings

Parameter	Description
Policy Name	Specify the name of the IPsec security policy. The name must be a string of 1 to 28 characters.
Internet	Format of the IP address. Both IPv4 and IPv6 address formats are supported.
Peer Gateway	Enter the IP address or domain name of the peer device.
Interface	Select a WAN interface used locally from the drop-down list box. In the multi-line scenario, you are advised to set this parameter to Auto .

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Key Exchange Version	Select the IKE version for SA negotiation. There are two options available: ● IKEv1: The negotiation of SA in IKEv1 primarily consists of two phases. ○ Phase 1: The purpose is to establish an IKE SA using one of two negotiation modes: Main Mode and Aggressive Mode. Main Mode requires six ISAKMP (Internet Security Association and Key Management Protocol) messages to complete the negotiation, while Aggressive Mode only requires three ISAKMP messages. Aggressive Mode offers faster IKE SA establishment. However, it combines key exchange and identity authentication, which means it does not provide identity protection. ○ Phase 2: The purpose is to establish an IPsec SA for data transmission, utilizing a fast exchange mode that requires only three ISAKMP messages to complete the negotiation. ● IKEv2: In IKEv2, the negotiation process for SA is simplified. The establishment of one IKE SA and one pair of IPsec SAs can be accomplished using two exchanges with four messages. If there is a need

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
	to establish more than one pair of IPsec SAs, only one additional exchange is needed for each pair. This enables the negotiation to be completed with just two messages per pair.
Local Subnets	Specify the local subnet address range for the data flows to be protected, that is, the LAN port network segment of the server. The value is the combination of IP address and subnet mask.
Peer Subnets	Specify the peer subnet address range for the data flows to be protected, that is, the LAN port network segment of the client. The value is the combination of IP address and subnet mask.
Pre-shared Key	Configure the pre-shared key the same as that on the IPsec server.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Status	Specify whether to enable the security policy.

You can configure advanced parameters by referring to the corresponding settings on the IPsec server. For details, see [Advanced Settings \(Phase 1\)](#) and [Advanced Settings \(Phase 2\)](#).

11.1.4 Setting WAN Interface Priority

Choose **One-Device > Gateway > Config > VPN > IPsec > IPsec Security Policy**.

When there are multiple WAN interfaces on the network, configuring WAN interface priorities allows you to define forwarding order for IPsec VPN traffic.

Note

By default, priorities are assigned based on the sequence of WAN interfaces, with WAN0 having the highest priority, followed by WAN1, WAN2, and so on.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (1) Select a policy in the list and click **Edit**.

Policy List							+ Add
Policy Type ①	Policy Name ②	Peer Gateway ③	Key Exchange Version	Local Subnet ④	Peer Subnet ⑤	Status	Action
Client	Test	192.168.120.1	IKEv1	192.168.110.0/24	192.168.11.0/24	Enable	Edit Delete
Total 1							1 10/page

- (2) Click **WAN Port Priority**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

Policy Type ? ☒ Client ☐ Server

Internet ? ☒ IPv4 ☐ IPv6

* Policy Name ?

* Peer Gateway ? +

Interface ?

Key Exchange Version ☒ IKEv1 ☐ IKEv2 ?

* Subnets

Local Subnets

 +

Peer Subnets

* Pre-shared Key ?

Status ☒

1. Set IKE Policy

2. Configure Policy

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (3) Configure the parameters, and click **OK**.

Table 11-5 Description of WAN Port Priority

Parameter	Description
Preferred Interface	Select WAN interfaces based on their priorities. A lower value indicates a higher priority.
Forced Priority	When enabled, if a higher-priority line becomes available, it will switch over immediately. This could potentially cause interruptions in VPN connectivity. Please proceed with caution.

11.1.5 Viewing the IPsec Connection Status

Choose **One-Device > Gateway > Config > VPN > IPsec > IPsec Connection Status**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

You can view the IPsec tunnel connection status on the current page.

IPSec Security Policy

IPSec Connection Status

IPSec Connection Status

Refresh

Name	SPI	Direction	Tunnel Endpoint	Flow	Status	Security Protocol	Algorithm
test	32569111 34	in	172.26.1.200<--172.26.30.192	192.168.120.0/24 <-- 192.168.110.0/24	OK	ESP	AH Authentication: -- ESP Authentication: SHA1 ESP Security: AES-128
test	32874839 13	out	172.26.1.200-->172.26.30.192	192.168.120.0/24 --> 192.168.110.0/24	OK	ESP	AH Authentication: -- ESP Authentication: SHA1 ESP Security: AES-128

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-6 IPsec tunnel connection status information

Parameter	Description
Name	Indicate the security policy name on the IPsec server or client.
SPI	Indicate the Security Parameter Index (SPI) of the IPsec connection, used to associate the received IPsec data packets with the corresponding SA. The SPI of each IPsec connection must be unique.
Direction	Indicate the direction of the IPsec connection. The value in indicates inbound, and the value out indicates outbound.
Tunnel Client	Indicate the gateway addresses on two ends of the IPsec connection. The arrow indicates the direction of data flows to be protected by the current tunnel.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Flow	Indicate the subnet range on two ends of the IPsec connection. The arrow indicates the direction of data flows to be protected by the current tunnel.
Status	Indicate the IPsec tunnel connection status.
Security Protocol	Indicate the security protocol used by the IPsec connection.
Algorithm	Indicate the encryption algorithm and authentication algorithm used by the IPsec connection.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

11.1.6 Typical Configuration Example

1. Networking Requirements

The HQ and branch of an enterprise are connected through the Internet. An IPsec tunnel needs to be established between the HQ gateway and branch gateway to ensure the confidentiality of transmitted data.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.


Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

2. Networking Diagram

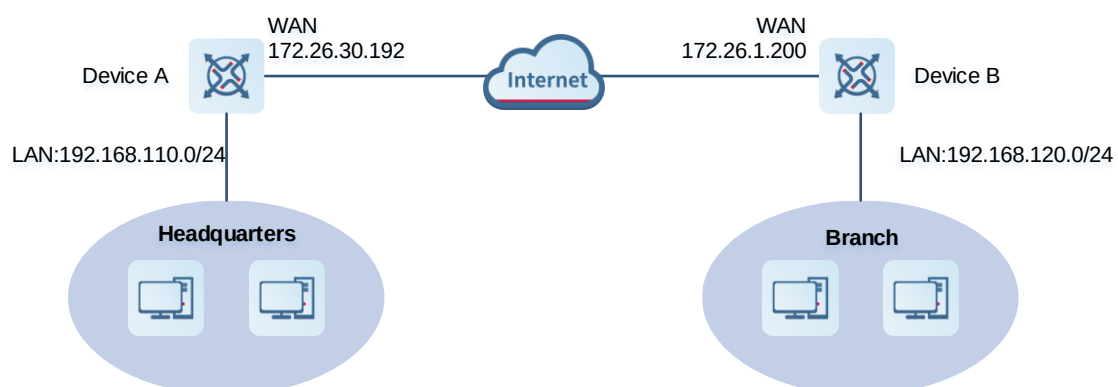

3. Configuration Roadmap

- Configure the HQ gateway Device A as the IPsec server.
- Configure the branch gateway Device B as the IPsec client.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

4. Configuration Steps

- Configure the HQ gateway.

- (1) Log in to the web management system and choose **One-Device > Gateway > Config > VPN > IPsec > IPsec Security Policy** to access the IPsec Security Policy page.

Note: Example: IP address/number of subnet mask bits.
Tips: If it is set to 192.168.110.x/24, the address range is from 192.168.110.1 to 192.168.110.254.
Up to 3 entries with the policy type of client can be configured.
Up to 1 entry with the policy type of server can be configured.
The server and client cannot be configured at the same time.

Policy List

Policy Type	Policy Name	Peer Gateway	Key Exchange Version	Local Subnet	Peer Subnet	Status	Action
No Data							

Total 0 < 1 > 10/page

- (2) Click **Add**. In the dialog box that appears, set Policy Type to Server, enter the policy name, select the bound interface, and configure the local subnet to be accessed through IPsec and the pre-shared key.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

If the device connects to other EG devices in the Reeye network, you are advised to keep the default settings in IKE phase 1 and phase 2. If the device connects to devices from another vendor, keep the parameter settings consistent on the connected devices.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×



If clients want to access from different WAN ports, please set Local ID Type to Name. Otherwise, all clients will access from the same one WAN port.

Policy Type ☐ Client ☒ Server

Internet ☒ IPv4 ☐ IPv6

* Policy Name

Interface

Key Exchange Version ☒ IKEv1 ☐ IKEv2



* Subnets

+ Local Subnets

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- Configure the branch gateway.
- (1) Log in to the web management system and access the IPsec Security Policy page.
 - (2) Click **Add**. In the dialog box that appears, set Policy Type to Client, enter the policy name, select the peer gateway (WAN interface address or domain name of the HQ gateway), and configure the local subnet that needs to access the peer subnet and the pre-shared key the same as that on the HQ gateway. Keep the other phase 1 and phase 2 parameters consistent with those on the IPsec server.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add



Policy Type (?) ☒ Client ☐ Server

Internet (?) ☒ IPv4 ☐ IPv6

* Policy Name (?)

* Peer Gateway (?) +

Interface (?) ▾

Key Exchange Version ☒ IKEv1 ☐ IKEv2



* Subnets

Local Subnets



Peer Subnets

* Pre-shared Key (?)



1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

5. Verifying Configuration

- (1) Log in to the web management system of the HQ or branch gateway and choose **One-Device > Gateway > Config > VPN > IPsec > IPsec Connection Status**. You can view the IPsec connection status between the HQ and branch.

IPsec Security Policy [IPsec Connection Status](#)

IPsec Connection Status ?								
IPsec Connection Status Refresh								
Name	SPI	Direction	Tunnel Client	Flow	Status	Security Protocol	Algorithm	
test	3483169338	in	172.26.30.192<--172.26.1.200	192.168.110.0/24 <-- 192.168.120.0/24	OK	ESP	AH Authentication: -- ESP Authentication: SHA1 ESP Security: AES-128	
test	3281459512	out	172.26.30.192-->172.26.1.200	192.168.110.0/24 --> 192.168.120.0/24	OK	ESP	AH Authentication: -- ESP Authentication: SHA1 ESP Security: AES-128	

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (2) Perform ping test between clients on the two ends that need to access each other. The clients can successfully ping and access each other.

11.1.7 Solution to IPsec VPN Connection Failure

- (1) Run the ping command to test the connectivity between the client and server. For details, see Section [13.12.3 Network Tools](#). If the ping fails, check the network connection settings. Check whether the branch EG can ping to HQ EG. If the ping fails, check the network connection between the two EGs.

Choose **One-Device > Gateway > Config > Diagnostics > Network Tools**. Then, you can start the ping operation. For details, see Section [13.12.3 Network Tools](#).

- (2) Confirm that the configurations on the IPsec server and IPsec client are correct.

Choose **One-Device > Gateway > Config > VPN > IPsec > IPsec Security Policy** and confirm that the security policies configured on the two ends are matching.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Policy List							+ Add
Up to 1 entries can be added.							
Policy Type	Policy Name	Peer Gateway	Local Subnet	Peer Subnet	Status	Action	
Server	test	0.0.0.0	192.168.110.0/24	0.0.0.0/0	Enable ☹	Edit Delete	

Policy List							+ Add
Up to 1 entries can be added.							
Policy Type	Policy Name	Peer Gateway	Local Subnet	Peer Subnet	Status	Action	
Client	test	172.26.30.192	192.168.120.0/24	192.168.110.0/24	Enable ☹	Edit Delete	

- (3) Check whether the WAN IP address of your HQ EG is a public IP address. If not, you need to configure DMZ or port mapping (UDP 500 and 4500 used as IPsec VPN port) on your egress gateway and set **Local ID Type** to **NAME** on HQ and branch gateways.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

1. Set IKE Policy

Authentication-Encryption-DH Group

IKE Policy 1 sha1-3des-dh1

IKE Policy 2 sha1-des-dh1

IKE Policy 3 sha1-3des-dh2

IKE Policy 4 md5-des-dh1

IKE Policy 5 md5-3des-dh2

Negotiation Mode ☒ Main Mode ☐ Aggressive Mode

Local ID Type ☐ IP ☒ Name

* Local ID HQ

Peer ID Type ☐ IP ☒ Name

* Peer ID Branch

* Lifetime 86400

DPD ☒ Enable ☐ Disable

* DPD Interval 10 seconds

1. Set IKE Policy

Authentication-Encryption-DH Group

IKE Policy 1 sha1-3des-dh1

IKE Policy 2 sha1-des-dh1

IKE Policy 3 sha1-3des-dh2

IKE Policy 4 md5-des-dh1

IKE Policy 5 md5-3des-dh2

Negotiation Mode ☒ Main Mode ☐ Aggressive Mode

Local ID Type ☐ IP ☒ Name

* Local ID Branch

Peer ID Type ☐ IP ☒ Name

* Peer ID HQ

* Lifetime 86400

DPD ☒ Enable ☐ Disable

* DPD Interval 10 seconds

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

11.2 Configuring L2TP VPN

11.2.1 Overview

Layer Two Tunneling Protocol (L2TP) is a virtual tunneling protocol, usually used in virtual private networks.

The L2TP protocol does not provide encryption and reliability verification functions, but it can work with a security protocol to implement encrypted data transmission. L2TP is frequently used with IPsec to encapsulate packets using L2TP before encapsulating packets using IPsec. This combination implements user verification and address allocation through L2TP and ensures communication security through IPsec.

L2TP VPN can be used to establish secure tunnels between the enterprise HQ and branches and allow traveling employees to access the HQ. Currently, the device can be deployed as the L2TP server or client.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

11.2.2 Configuring the L2TP Server

1. Basic Settings of L2TP Server

Choose **One-Device > Gateway > Config > VPN > L2TP > L2TP Settings**.

Turn on the L2TP function, set **L2TP Type** to **Server**, set L2TP server parameters, and click **Save**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Enable ☒

L2TP Type ☒ Server ☐ Client

* Local Tunnel IP

* IP Range (?)

* DNS Server

Tunnel Authentication ☒ Disable ☐ Enable

IPSec Security ☒ Open ☐ Security

Flow Control ☒ Disable ☐ Enable

* PPP Hello Interval (?) seconds

Save

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-7 L2TP server configuration

Parameter	Description
Local Tunnel IP	Specify the local virtual IP address of the L2TP server. Clients can dial up to access the L2TP server through this address.
IP Range	Specify the address pool used by the L2TP server to allocate IP addresses to clients.
DNS Server	Specify the DNS server address pushed by the L2TP server to clients.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Tunnel Authentication	Specify whether to enable L2TP tunnel authentication. If you enable this function, you need to configure a tunnel authentication key. By default, tunnel authentication is disabled. The tunnel authentication request can be initiated by clients. If tunnel authentication is enabled on one end, a tunnel to the peer can be established only when tunnel authentication is also enabled on the peer and consistent keys are configured on the two ends. Otherwise, the local end will automatically shut down the tunnel connection. If tunnel authentication is disabled on both ends, no authentication key is required for tunnel establishment. When a PC functions as the client to access the L2TP server, you are advised not to enable tunnel authentication on the L2TP server.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
IPsec Security	Specify whether to encrypt the tunnel. If you select Security, the device encrypts the L2TP tunnel using IPsec, indicating the L2TP over IPsec mode. If an IPsec security policy is enabled on the current device, you cannot enable IPsec encryption for the L2TP tunnel. If you want to configure L2TP over IPsec, disable the IPsec security policy first. The IPsec encryption configuration on the L2TP server and client must be consistent. For details, see Section Configuring the L2TP over IPsec Server.
Flow Control	The VPN server has a lower priority to control the traffic of the client than the custom policy. The VPN server can only limit the maximum uplink and downlink bandwidth per user for the client. For details, see Section 9.6.2 Smart QoS.

1 Configuration Guide

SD-WAN

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
PPP Hello Interval	Specify the interval for sending PPP Hello packets after L2TP VPN is deployed. You are advised to retain the default configuration.

Caution

The local tunnel address and IP address range of the address pool cannot overlap the network segment of the LAN port on the device.

2. Configuring the L2TP over IPsec Server

Choose **One-Device > Gateway > VPN > L2TP > L2TP Settings**.

After you complete [Basic Settings of L2TP Server](#), enable IPsec encryption on the L2TP server to guarantee communication security. For details on the IPsec configuration, see Section [11.1 Configuring IPsec VPN](#).

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

* DNS Server

Tunnel Authentication ☒ Disable ☐ Enable

IPSec Security ☐ Open ☒ Security

* Pre-shared Key ?

IKE Policy

Transform Set

Negotiation Mode ☒ Main Mode ☐ Aggressive Mode

Local ID Type ☒ IP Address ☐ NAME

Flow Control ☒ Disable ☐ Enable

* PPP Hello Interval ? seconds

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-8 L2TP over IPsec server configuration

Parameter	Description
Pre-shared Key	Specify the same unique pre-shared key as the credential for mutual authentication between the server and client.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

IKE Policy	Select the encryption algorithm, hash algorithm, and DH group ID used by the IKE protocol. To ensure successful IKE negotiation, the two parties engaged in IKE negotiation must have at least one set of consistent IKE policy. The IKE policies on the server and client must be consistent. ● Hash algorithm: ○ sha1: SHA-1 algorithm ○ md5: MD5 algorithm ● Encryption algorithm: ○ des: DES algorithm using 56-bit keys ○ 3des: 3DES algorithm using 168-bit keys ○ aes-128: AES algorithm using 128-bit keys ○ aes-192: AES algorithm using 192-bit keys ○ aes-256: AES algorithm using 256-bit keys ● DH group ID: ○ dh1: 768-bit DH group ○ dh2: 1024-bit DH group ○ dh5: 1536-bit DH group

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Transform Set	Specify the set of security protocol and algorithms. During IPsec SA negotiation, the two parties use the same transform set to protect specific data flow. The transform set on the server and client must be the same. ● Security protocol: The Encapsulating Security Payload (ESP) protocol provides data source authentication, data integrity check, and anti-replay functions for IPsec connections and guarantees data confidentiality. ● Verification algorithm: ○ sha1: SHA-1 HMAC ○ md5: MD5 HMAC ● Encryption algorithm: ○ des: DES algorithm using 56-bit keys ○ 3des: 3DES algorithm using 168-bit keys ○ aes-128: AES algorithm using 128-bit keys ○ aes-192: AES algorithm using 192-bit keys ○ aes-256: AES algorithm using 256-bit keys

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Negotiation Mode	Select Main Mode or Aggressive Mode. The negotiation mode on the server and client must be the same. ● Main Mode: This mode is applicable to communication between fixed public network IP addresses and point-to-point communication between devices. In this mode, the peer identity is authenticated to provide high security. ● Aggressive Mode: The public network IP addresses obtained by ADSL dial-up users are not fixed and an NAT device may exist. Therefore, the aggressive mode is used to implement NAT traversal. In this mode, you need to set the local and peer ID type to NAME as the IP address is not fixed. The aggressive mode does not authenticate the peer identity, so it has low security.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Local ID Type	Specify the ID type of the local device. The peer ID of the client must be the same as local ID of the server. ● IP: The IP address is used as the identity ID. The ID of the local device is generated automatically. ● NAME: The host character string is used as the identity ID. The ID of the local device is generated automatically. In this case, you also need to configure the host character string that is used as the identity ID. When the WAN interface IP address of the server is a private network address, you need to set Local ID Type to NAME and configure DMZ on the external device. When the IP address is not fixed, you need to set Local ID Type to NAME and modify the peer device settings accordingly.
Local ID	When Local ID Type is set to NAME, the host character string is used as the identity ID. The peer ID of the client must be the same as local ID of the server.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

3. Configuring L2TP User

Choose **One-Device > Gateway > Config > VPN > VPN Account**

Only user accounts added to the VPN client list are allowed to dial up to connect to the L2TP server. Therefore, you need to manually configure user accounts for clients to access the L2TP server.

Click **Add**. In the dialog box that appears, set **Service Type** to **L2TP** or **ALL**. (If you select **ALL**, the created account can be used to establish all types of VPN tunnels.) Enter the username, password, and peer subnet, select a network mode, and click **OK**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

VPN User List							
		Username/Password		+ Add		Delete All	
						Delete Selected	
☐	Username	Password	Service Type	Network Mode	Client Subnet	Status	Action
☐	pptp@branch	****	PPTP	Router to Router	192.168.12.0/24	Enable	Edit Delete
☐	pptp@pc	****	PPTP	PC to Router	-	Enable	Edit Delete
☐	OpenVpnUser1	****	OpenVpn	-	-	Enable	Edit Delete
Up to 300 entries can be added.							
				Total 3	< 1 >	10/page	

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add User



Service Type ?

L2TP



* Username

L2TP

* Password

.....



Network Mode ?

PC to Router



Status



Cancel

OK

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-9 L2TP user configuration

Parameter	Description
Username/Password	Specify the name and password of the L2TP user allowed to dial up to connect to the L2TP server. The username and password are used to establish a connection between the server and client.
Network Mode	● PC to Router: The dial-up client is an individual. Select this mode when a PC wants to dial up to communicate with the remote PC through the LAN. ● Router to Router: The dial-up client is a user in a network segment. Select this mode when the LANs on two ends of the tunnel need to communicate through router dial-up.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Client Subnet	Specify the IP address range used by the LAN on the peer end of the L2TP tunnel. Generally, the Client Subnet is the IP address network segment of the LAN port on the device. (The LAN network segments of the server and client cannot overlap.) For example, when a branch dials up to connect to the HQ, enter the LAN network segment of the router. Note: When the Network Mode is set to Router to Router, you can click  to set multiple pairs of peer subnets for scenarios where multiple clients are connected to the same server.
Status	Specify whether to enable the user account.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

11.2.3 Configuring the L2TP Client

1. Basic Settings of L2TP Client

Choose **One-Device > Gateway > Config > VPN > L2TP > L2TP Settings**.

Turn on the L2TP function, set **L2TP Type** to **Client**, set L2TP client parameters, and click **Save**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Enable ☒

L2TP Type ☐ Server ☒ Client

* Username ⓘ Username of L2TP user

* Password ⓘ Password of L2TP user

Interface WAN0 ▾

Tunnel IP ☒ Dynamic ☐ Static

* Server Address IP/Domain

* Server Subnet ⓘ 192.168.110.0/24 +

Route All Traffic over VPN No ▾



Tunnel Authentication ☒ Disable ☐ Enable

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-10 L2TP client configuration

Parameter	Description
Username/Password	Specify the username and password for identity authentication for communication over the L2TP tunnel. The values must be the same as those configured on the L2TP server.
Interface	Specify the WAN interface used by the client.
Tunnel IP	Specify the virtual IP address of the VPN tunnel client. If you select Dynamic , the client obtains an IP address from the server address pool. If you select Static , manually configure an idle static address within the range of the server address pool as the local tunnel IP address.
Server Address	Enter the WAN interface IP address or domain name of the server. This address must be a public network IP address.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Server Subnet	Enter the LAN network segment in which clients want to access the server. The value cannot overlap with the LAN network segment of the client.
Route ALL Traffic over VPN	Once this feature is enabled, all traffic will be directed through the VPN connection, that is, VPN is configured as the default route.
Tunnel Authentication	Specify whether to enable L2TP tunnel authentication. If you enable this function, you need to enter tunnel authentication key the same as that configured on the server. By default, tunnel authentication is disabled. To protect tunnel security, you are advised to enable tunnel authentication.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
IPsec Security	Specify whether to encrypt the tunnel. If you select Security , the device Enable the L2TP tunnel using IPsec, indicating the L2TP over IPsec mode. The IPsec encryption configuration on the server and client must be consistent. For details, see Section Configuring the L2TP over IPsec Client .
Working Mode	● NAT: Perform NAT traversal on the data packet passing through the L2TP tunnel. That is, replace the source IP address of the data packet with the local virtual IP address of the L2TP tunnel. In NAT mode, the server cannot access the LAN where the client resides. ● Router: Only route the data packet passing through the L2TP tunnel. In router mode, the server can access the LAN where the client resides.
PPP Hello Interval	Specify the interval for sending PPP Hello packets after L2TP VPN is deployed. You are advised to retain the default configuration.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

2. Configuring the L2TP over IPsec Client

Choose **One-Device > Gateway > Config > VPN > L2TP > L2TP Settings**.

After you complete [Basic Settings of L2TP Client](#), enable IPsec encryption on the L2TP client to guarantee communication security. The IPsec encryption configuration on the server and client must be consistent. For details, see [Configuring the L2TP over IPsec Server](#).

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Tunnel Authentication ☒ Disable ☐ Enable

IPSec Security ☐ Open ☒ Security

* Pre-shared Key (?)

IKE Policy

Transform Set

Negotiation Mode ☒ Main Mode ☐ Aggressive Mode

Peer ID Type ☒ IP Address ☐ NAME

Working Mode (?) ☒ NAT ☐ Router

* PPP Hello Interval (?) seconds

Save

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

11.2.4 Viewing the L2TP Tunnel Information

Choose **One-Device > Gateway > Config > VPN > L2TP > Tunnel List**.

It takes some time to establish a VPN connection between the server and client. After the configuration of the server and client is completed, wait for 1 to 2 minutes to refresh the page and view the L2TP tunnel establishment status.

Export Log File Username Delete Selected									
☐	Username ?	Server/Client ?	Tunnel Name ?	Virtual Local IP ?	Access Server IP ?	Peer Virtual IP ?	DNS ?	Status	Action
No Data									
Total 0 < 1 > 10/page									

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-11 L2TP tunnel information

Parameter	Description
Username	Indicate the username used by the client for identity authentication.
Server/Client	Indicate the role of the current device, which is client or server.
Tunnel Name	Indicate the name of the vNIC generated by L2TP.
Virtual Local IP	Indicate the local virtual IP address of the tunnel. The virtual IP address of the L2TP client is allocated by the L2TP server.
Access Server IP	Indicate the real IP address of the peer connecting to the L2TP tunnel.
Peer Virtual IP	Indicate the peer virtual IP address of the tunnel. The virtual IP address of the L2TP client is allocated by the L2TP server.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
DNS	Indicate the DNS server address allocated by the L2TP server.

11.2.5 Typical Configuration Example

1. Networking Requirements

An enterprise wants to establish an L2TP tunnel to allow its traveling employees and branch employees to access the servers deployed in the HQ LAN.

- Traveling employees want to access the HQ servers from their PCs through L2TP VPN.
- Branch employees need to frequently access documents on the HQ servers. The enterprise wants to deploy the branch router (Device B) as the L2TP client, so that branch employees can dial up to transparently and directly access documents on the HQ servers, as if they are accessing servers inside the branch.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.


Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

2. Networking Diagram

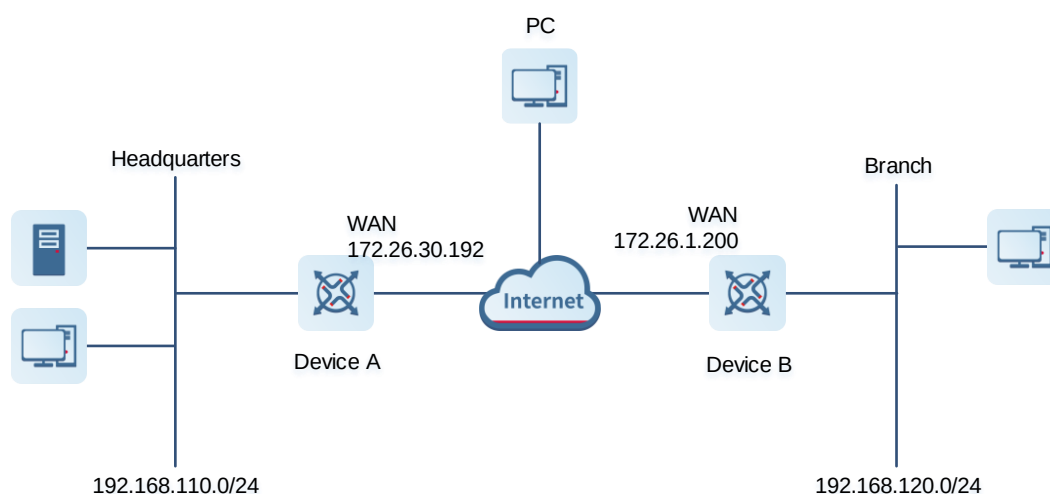

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

3. Configuration Roadmap

- Configure the HQ gateway Device A as the L2TP server.
- Configure the branch gateway Device B as the L2TP client.
- Configure the PC of the traveling employee as the L2TP client.

4. Configuration Steps

- Configure the HQ gateway.

Note

The LAN address of the HQ cannot conflict with that of the branch. Otherwise, resource access will fail.

- (1) Log in to the web management system and choose **One-Device > Gateway > Config > VPN > L2TP > L2TP Settings** to access the L2TP Settings page.
- (2) Turn on the L2TP function, set L2TP Type to **Server**, enter the local tunnel IP, IP Range, and DNS Server address, specify whether to enable IPsec encryption and tunnel authentication, and click **Save**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Enable ☒

L2TP Type ☒ Server ☐ Client

* Local Tunnel IP

IP Range (?)

* DNS Server

Tunnel Authentication ☒ Disable ☐ Enable

IPSec Security ☐ Open ☒ Security

* Pre-shared Key (?) 

IKE Policy 

Transform Set 

Negotiation Mode ☒ Main Mode ☐ Aggressive Mode

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-12 L2TP server configuration

Parameter	Description
Local Tunnel IP	Enter an IP address not in the LAN network segment. The PC can dial up to access the server through this IP address.
IP Range	Enter an IP address range not in the LAN network segment, which is used to allocate IP addresses to clients.
DNS Server	Enter an available DNS server address.
Tunnel Authentication	By default, tunnel authentication is disabled. After this function is enabled, the server and client can be connected only when they use the same tunnel key. You can keep tunnel authentication disabled.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
IPsec Security	Specify whether to encrypt the L2TP tunnel using the IPsec protocol. You are advised to select Security to guarantee data security. If an IPsec security policy is enabled on the current device, you cannot enable IPsec encryption for the L2TP tunnel. If you want to configure L2TP over IPsec, disable the IPsec security policy first.
Pre-shared Key	Enter the key for IPsec authentication. The client can access the server only when the same pre-shared key is configured on the client.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
IKE Policy Transform Set Negotiation Mode Local ID Type Local ID	Keep the default settings unless otherwise specified.
Flow Control	The VPN server has a lower priority to control the traffic of the client than the custom policy. The VPN server can only limit the maximum uplink and downlink bandwidth per user for the client. For details, see Section 9.6.2 Smart QoS .
PPP Hello Interval	Keep the default settings unless otherwise specified.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (3) Choose **One-Device > Gateway > Config > VPN > VPN Account** and add L2TP user accounts for the traveling employee and branch employee to access the HQ.

For the traveling employee account, set **Network Mode** to **PC to Router**.

For the branch employee account, set **Network Mode** to **Router to Router** and **Peer Subnet** to the LAN network segment of the branch gateway, which is 192.168.120.0/24.

Caution

The LAN network segments of the server and client cannot overlap.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add User

Service Type ⓘ L2TP

* Username brach

* Password

Network Mode ⓘ Router to Router

* Client Subnet 192.168.120.0/24 +

Status ☒

Cancel OK

Add User

Service Type ⓘ L2TP

* Username pc@l2tp

* Password

Network Mode ⓘ PC to Router

Status ☒

Cancel OK

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

VPN User List							
		Username/Password		+ Add		Delete All	
						Delete Selected	
☐	Username	Password	Service Type	Network Mode	Client Subnet	Status	Action
☐	pptp@branch	****	PPTP	Router to Router	192.168.12.0/24	Enable	Edit Delete
☐	pptp@pc	****	PPTP	PC to Router	-	Enable	Edit Delete
☐	OpenVpnUser1	****	OpenVpn	-	-	Enable	Edit Delete
☐	branch	*****	L2TP	Router to Router	192.168.120.0/24	Enable	Edit Delete
☐	pc@l2tp	*****	L2TP	PC to Router	-	Enable	Edit Delete

Up to 300 entries can be added.

Total 5 < 1 > 10/page

- Configure the branch gateway.

- (1) Log in to the web management system and access the L2TP Settings page.
- (2) Turn on the L2TP function, set L2TP Type to Client, enter the username and password configured on the server, server address, and LAN network segment of the peer, configure IPsec encryption parameters the same as those on the server, and click Save.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Enable ☒

L2TP Type ☐ Server ☒ Client

* Username ⓘ

* Password ⓘ ⓘ

Interface ▼

Tunnel IP ☒ Dynamic ☐ Static

* Server Address

* Server Subnet ⓘ +

Route All Traffic over VPN ▼



Tunnel Authentication ☒ Disable ☐ Enable

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-13 L2TP client configuration

Parameter	Description
Username/Password	Enter the username and password configured on the server.
Interface	Select the WAN interface on the client to establish a tunnel with the server.
Tunnel IP	Select Dynamic to automatically obtain the tunnel IP address. You can also select Static and enter an IP address in the address pool of the server.
Server Address	Enter the WAN interface address of the server, which is 172.26.30.192.
Server Subnet	Enter the LAN network segment (LAN port IP address range) of the server, which is 192.168.110.0/24.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Route ALL Traffic over VPN	Once this feature is enabled, all traffic will be directed through the VPN connection, that is, VPN is configured as the default route.
Tunnel Authentication	The value must be the same as that on the server. In this example, you need to disable tunnel authentication.
IPsec Security	The value must be the same as that on the server. In this example, you need to set this parameter to Security .
Pre-shared Key	Enter the pre-shared key configured on the server.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
IKE Policy Transform Set Negotiation Mode Peer ID Type Peer ID	The settings must be the same as those on the server. Set Peer ID Type to the same value as that of Local ID Type on the server.
Working Mode	If the HQ wants to access the LAN of the branch, set this parameter to Router .
PPP Hello Interval	Specify the interval for sending PPP Hello packets after L2TP VPN is deployed. Keep the default settings.

- Configure the PC of the traveling employee.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Note

Configure the PC of a traveling employee as the L2TP client. The following uses the PC running Windows 10 operating system as an example.

The Windows XP (shorted as XP) system and Windows 7/Windows 10 (shorted as Win7/10) system differ in their support for L2TP VPN: To enable L2TP VPN in the XP system, you need to modify the service registries. L2TP is supported in the Win7/10 system by default, without the need to modify registries.

Neither the Win7/Win10 system nor the XP system supports L2TP tunnel authentication. Therefore, tunnel authentication must be disabled on the server.

Apple mobile phones support L2TP over IPsec but do not support IPsec encryption for L2TP dial-up.

- (1) Choose **Settings > Network & Internet > VPN** to access the VPN page.

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

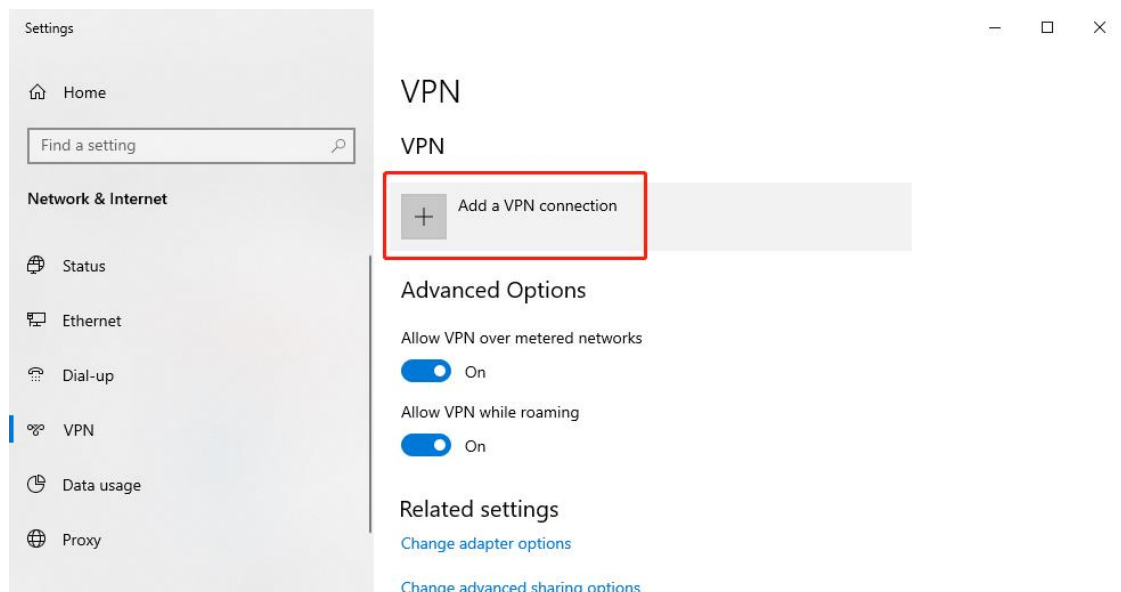

- (2) Click **Add a VPN connection**. In the dialog box that appears, set VPN provider to **Windows**, enter the connection name and server address or domain name, and click **Save**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Settings

Add a VPN connection

VPN provider
Windows (built-in) ▼

Connection name
L2TP_TEST

Server name or address
172.26.30.192

VPN type
Automatic ▼

Type of sign-in info
User name and password ▼

User name (optional)

Save Cancel

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.


Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (3) Right-click the created VPN connection named **L2TP_TEST** and select Properties to view the properties of the network connection.

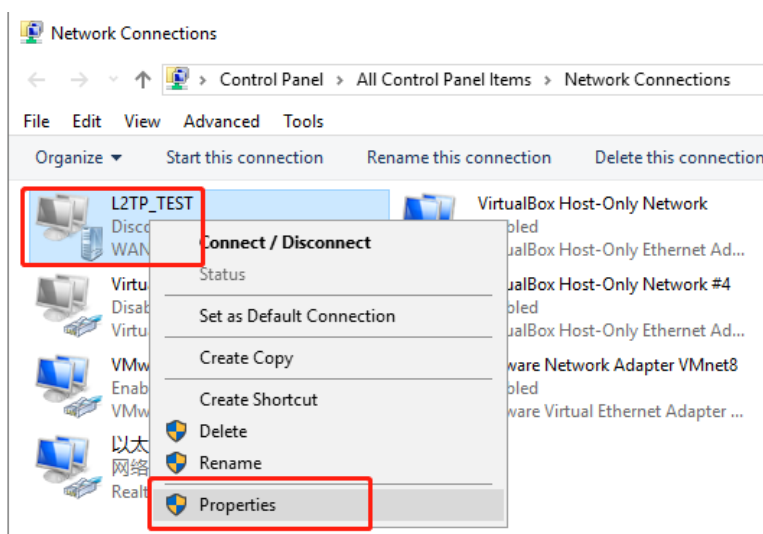

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (4) In the dialog box that appears, click the Security tab, and set Type of VPN to Layer 2 Tunneling Protocol with IPsec (L2TP/IPsec) and Data encryption to Optional encryption (connect even if no encryption).

If IPsec encryption is not enabled on the L2TP server, select **Unencrypted password (PAP)** and click **OK**. Skip [Step \(5\)](#).

If IPsec encryption is enabled on the L2TP server, perform [Step \(5\)](#).

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

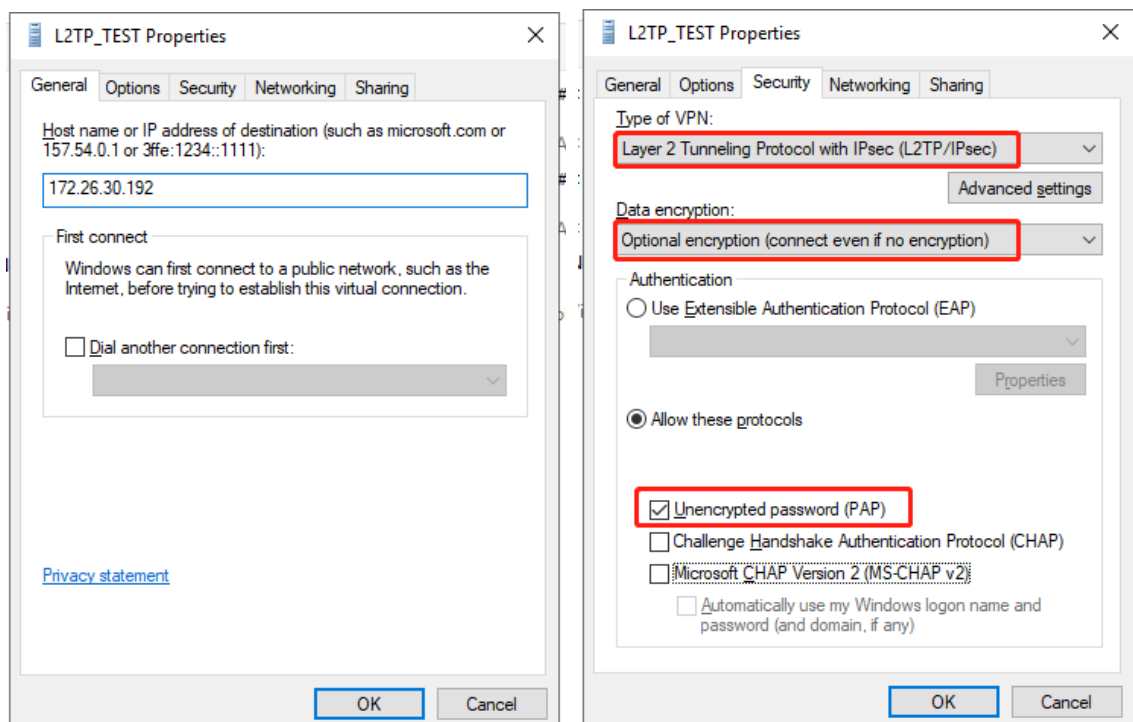

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (5) If IPsec encryption is enabled on the server, select **CHAP** and **MS-CHAP v2** as the identity authentication protocols and click **Advanced settings**. In the dialog box that appears, configure the pre-shared key the same as that on the server. After completing the configuration, click **OK**.

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

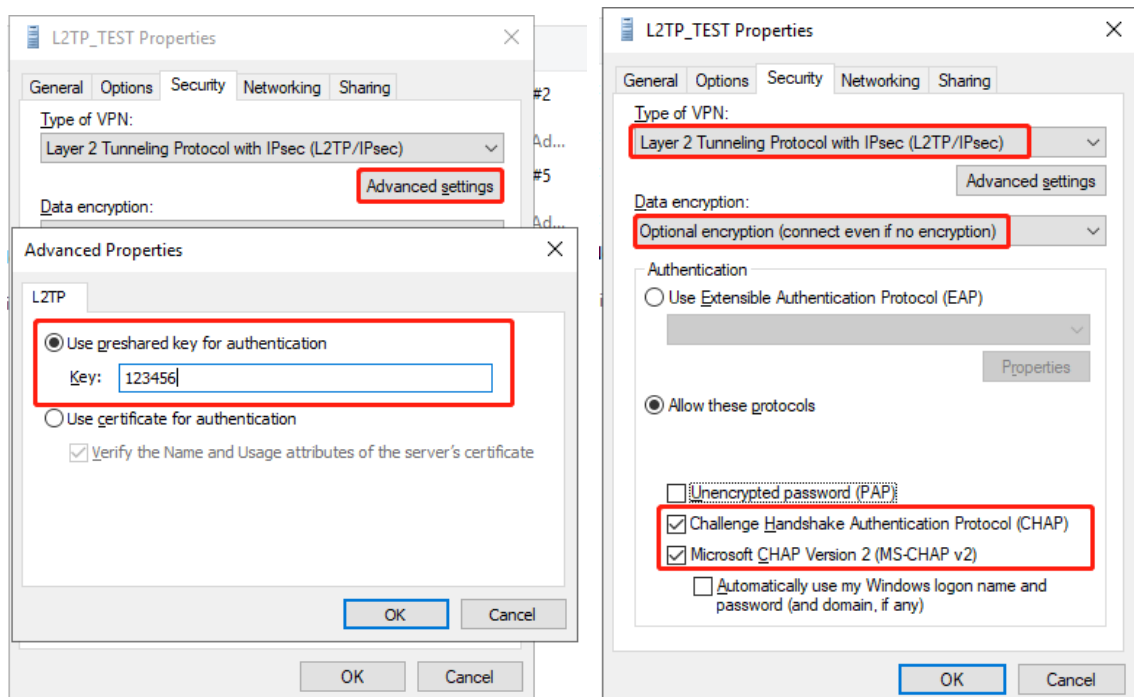

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Note

The device does not support EAP for identity authentication. Therefore, you cannot select EAP-related identity authentication options in the Windows client. Otherwise, the VPN connection fails.

- (6) After the L2TP client configuration is completed on the PC, initiate a VPN connection on the PC. Click the network icon  in the task bar, select the created L2TP VPN connection, and click Connect. In the dialog box that appears, enter the username and password configured on the server.

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

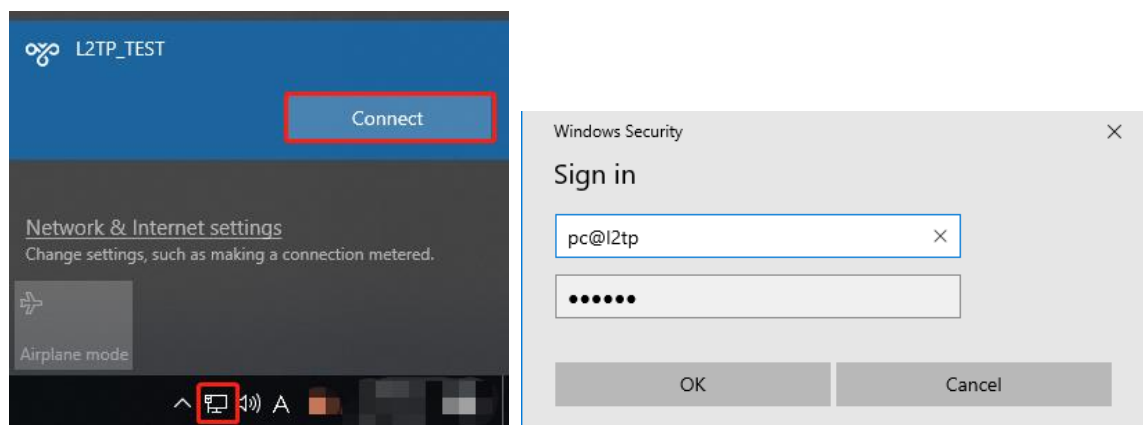

5. Verifying Configuration

- (1) After the server and client are configured, wait for about 1 minute. If you can view the L2TP tunnel connection information on the HQ server and branch client, the connection is successful.

HQ:

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

L2TP Settings [Tunnel List](#)

Tunnel List								?
								Delete Selected
☐	Username	Server/Client	Tunnel Name	Virtual Local IP	Access Server IP	Peer Virtual IP	DNS	Action
☐	pc@l2tp	Server	ppp2	20.0.0.1	172.26.1.200	20.1.1.3	114.114.114.114	Delete
☐	branch	Server	ppp0	20.0.0.1	172.26.1.200	20.1.1.2	114.114.114.114	Delete

Branch:

Tunnel List								?
								Delete Selected
☐	Username	Server/Client	Tunnel Name	Virtual Local IP	Access Server IP	Peer Virtual IP	DNS	Action
☐	branch	Client	l2tp	20.1.1.2	172.26.30.192	20.0.0.1	114.114.114.114	Delete

- (2) Ping the LAN address of the peer from the HQ or branch. The HQ and branch can successfully communicate. The PC of the traveling employee and the PC of the branch employee can access the HQ server.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

```
C:\Windows\system32\cmd.exe

C:\Users\Administrator>ping 192.168.110.1

Pinging 192.168.110.1 with 32 bytes of data:
Reply from 192.168.110.1: bytes=32 time=2ms TTL=64
Reply from 192.168.110.1: bytes=32 time=2ms TTL=64
Reply from 192.168.110.1: bytes=32 time=2ms TTL=64
Reply from 192.168.110.1: bytes=32 time=2ms TTL=64

Ping statistics for 192.168.110.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 2ms, Average = 2ms
```

11.2.6 Solution to L2TP VPN Connection Failure

- (1) Run the ping command to test the connectivity between the client and server. For details, see Section [13.12.3 Network Tools](#). If the ping fails, check the network connection settings. Check whether the branch EG can ping to HQ EG. If the ping fails, check the network connection between the two EGs.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Choose **One-Device > Gateway > Config > Diagnostics > Network Tools**. Then, you can start the ping operation. For details, see Section [13.12.3 Network Tools](#).

- (2) Check whether the username and password used by the client are the same as those configured on the server.
- (3) Check whether the WAN interface IP address of your HQ EG is a public network IP address. If not, you need to configure DMZ on your egress gateway.

11.3 Configuring PPTP VPN

11.3.1 Overview

Point-to-Point Tunneling Protocol (PPTP) is an enhanced security protocol designed based on the Point-to-Point Protocol (PPP). It allows an enterprise to use private tunnels to expand its enterprise network over the public network. PPTP relies on the PPP protocol to implement security functions such as encryption and identity authentication. Generally, PPTP works with Password Authentication Protocol (PAP), Challenge Handshake Authentication Protocol (CHAP), Microsoft Challenge Handshake Authentication Protocol (MS-CHAPv1/v2), or Extensible Authentication Protocol-Transport Layer Security (EAP-TLS) for identity authentication and Microsoft Point-to-Point Encryption (MPPE) for encryption to improve security.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Currently, the device can be deployed as the PPTP server or client. It supports MPPE for encryption MSCHAP-v2 for identity authentication, and does not support EAP authentication.

11.3.2 Configuring the PPTP Service

1. Configuring the PPTP Server

Choose **One-Device > Gateway > Config > VPN > PPTP > PPTP Settings**.

Turn on the PPTP function, set **PPTP Type** to **Server**, configure PPTP server parameters, and click **Save**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Enable ☒

PPTP Type ☒ Server ☐ Client

* Local Tunnel IP

* IP Range

* DNS Server

MPPE ☒ Disable ☐ Enable

Flow Control ☒ Disable ☐ Enable

* PPP Hello Interval seconds

Save

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-14 PPTP server configuration

Parameter	Description
Local Tunnel IP	Specify the local virtual IP address of the L2TP server. Clients can dial up to access the L2TP server through this address.
IP Range	Specify the address pool used by the PPTP server to allocate IP addresses to clients.
DNS Server	Specify the DNS server address pushed by the PPTP server to clients.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
MPPE	Specify whether to use MPPE to encrypt the PPTP tunnel. After MPPE is enabled on the server: If Data encryption is set to Optional encryption on the client, the server and client can be connected but the server does not encrypt packets. If Data encryption is set to Require encryption on the client, the server and client can be connected and the server encrypts packets. If Data encryption is set to No encryption allowed on the client, the server and client cannot be connected. If MPPE is disabled on the server but the client requires encryption, the server and client connection fails. By default, MPPE is disabled on the server. After you enable MPPE, the bandwidth performance of the device degrades. You are advised to keep MPPE disabled if there are no special security requirements.

1 Configuration Guide

SD-WAN

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Flow Control	The VPN server has a lower priority to control the traffic of the client than the custom policy. The VPN server can only limit the maximum uplink and downlink bandwidth per user for the client. For details, see Section 9.6.2 Smart QoS .
PPP Hello Interval	Specify the interval for sending PPP Hello packets after PPTP VPN is deployed.

Caution

The local tunnel address and IP address range of the address pool cannot overlap the network segment of the LAN port on the device.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

2. Configuring PPTP User

Choose **One-Device > Gateway > Config > VPN > VPN Account**.

Only user accounts added to the VPN client list are allowed to dial up to connect to the PPTP server. Therefore, you need to manually configure user accounts for clients to access the PPTP server.

Click **Add**. In the dialog box that appears, set **Service Type** to **PPTP** or **ALL**. (If you select **ALL**, the created account can be used to establish all types of VPN tunnels.) Enter the username, password, and peer subnet, select a network mode, and click **OK**.

VPN User List							
				Username/Password			
				+ Add	Delete All	Delete Selected	
☐	Username	Password	Service Type	Network Mode	Client Subnet	Status	Action
☐	pptp@branch	****	PPTP	Router to Router	192.168.12.0/24	Enable	Edit Delete
☐	pptp@pc	****	PPTP	PC to Router	-	Enable	Edit Delete

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add User



Service Type (?)

ALL

* Username

Please enter a username.

* Password

Please enter a password.

Network Mode (?)

PC to Router

Status



Cancel

OK

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-15 PPTP user configuration

Parameter	Description
Username/Password	Specify the name and password of the PPTP user allowed to dial up to connect to the PPTP server. The username and password are used to establish a connection between the server and client.
Network Mode	● PC to Router: The dial-up client is an individual. Select this mode when a PC wants to dial up to communicate with the remote PC through the LAN. ● Router to Router: The dial-up client is a user in a network segment. Select this mode when the LANs on two ends of the tunnel need to communicate through router dial-up.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Client Subnet	Specify the IP address range used by the LAN on the peer end of the PPTP tunnel. Generally, the peer subnet is the IP address network segment of the LAN port on the device. (The LAN network segments of the server and client cannot overlap.) For example, when a branch dials up to connect to the HQ, enter the LAN network segment of the router. Note: When the Network Mode is set to Router to Router, you can click  to set multiple pairs of peer subnets for scenarios where multiple clients are connected to the same server.
Status	Specify whether to enable the user account.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

11.3.3 Configuring the PPTP Client

Choose **One-Device > Gateway > Config > VPN > PPTP > PPTP Settings**.

Turn on the PPTP function, set **PPTP Type** to **Client**, configure PPTP client parameters, and click **Save**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Enable ☒

PPTP Type ☐ Server ☒ Client

* Username ⓘ Username of PPTP user

* Password ⓘ Password of PPTP user

Interface WAN0

Tunnel IP ☒ Dynamic ☐ Static

* Server Address IP/Domain

* Server Subnet ⓘ 192.168.110.0/24 +

Route All Traffic over VPN No



✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-16 PPTP client configuration

Parameter	Description
Username/Password	Specify the username and password for identity authentication for communication over the PPTP tunnel. The values must be the same as those configured on the PPTP server.
Interface	Specify the WAN interface used by the client.
Tunnel IP	Specify the virtual IP address of the VPN tunnel client. If you select Dynamic , the client obtains an IP address from the server address pool. If you select Static , manually configure an idle static address within the range of the server address pool as the local tunnel IP address.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Server Address	Enter the WAN interface IP address or domain name of the server. This address must be a public network IP address.
Server Subnet	Enter the LAN network segment in which clients want to access the server. The value cannot overlap with the LAN network segment of the client.
Route All Traffic over VPN	Once this feature is enabled, all traffic will be directed through the VPN connection, that is, VPN is configured as the default route.
MPPE	Specify whether to use MPPE to encrypt the PPTP tunnel. The value must be the same as that on the server.
Working Mode	● NAT: The client can access the server network, but the server cannot access the client network. ● Router: The server can access the client network.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
PPP Hello Interval	Specify the interval for sending PPP Hello packets after a PPTP tunnel is established. You are advised to retain the default configuration.

11.3.4 Viewing the PPTP Tunnel Information

Choose **One-Device > Gateway > Config > VPN > PPTP > Tunnel List**.

It takes some time to establish a VPN connection between the server and client. After the configuration of the server and client is completed, wait for 1 to 2 minutes to refresh the page and view the PPTP tunnel establishment status.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Export Log File Username Delete Selected									
☐	Username ?	Server/Client ?	Tunnel Name ?	Virtual Local IP ?	Access Server IP ?	Peer Virtual IP ?	DNS ?	Status	Action
No Data									
Total 0 < 1 > 10/page									

Table 11-17 PPTP tunnel information

Parameter	Description
Username	Indicate the username used by the client for identity authentication.
Server/Client	Indicate the role of the current device, which is client or server.
Tunnel Name	Indicate the name of the vNIC generated by PPTP.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Virtual Local IP	Indicate the local virtual IP address of the tunnel. The virtual IP address of the PPTP client is allocated by the PPTP server.
Access Server IP	Indicate the real IP address of the peer connecting to the PPTP tunnel.
Peer Virtual IP	Indicate the peer virtual IP address of the tunnel. The virtual IP address of the PPTP client is allocated by the PPTP server.
DNS	Indicate the DNS server address allocated by the PPTP server.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

11.3.5 Typical Configuration Example

1. Networking Requirements

An enterprise wants to establish a PPTP tunnel to allow its traveling employees and branch employees to access the servers deployed in the HQ LAN.

- Traveling employees want to access the HQ servers from their PCs through PPTP dial-up.
- Branch employees need to frequently access documents on the HQ servers. The enterprise wants to deploy the branch router (Device B) as the PPTP client, so that branch employees can dial up to transparently and directly access documents on the HQ servers, as if they are accessing servers inside the branch.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.


Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

2. Networking Diagram

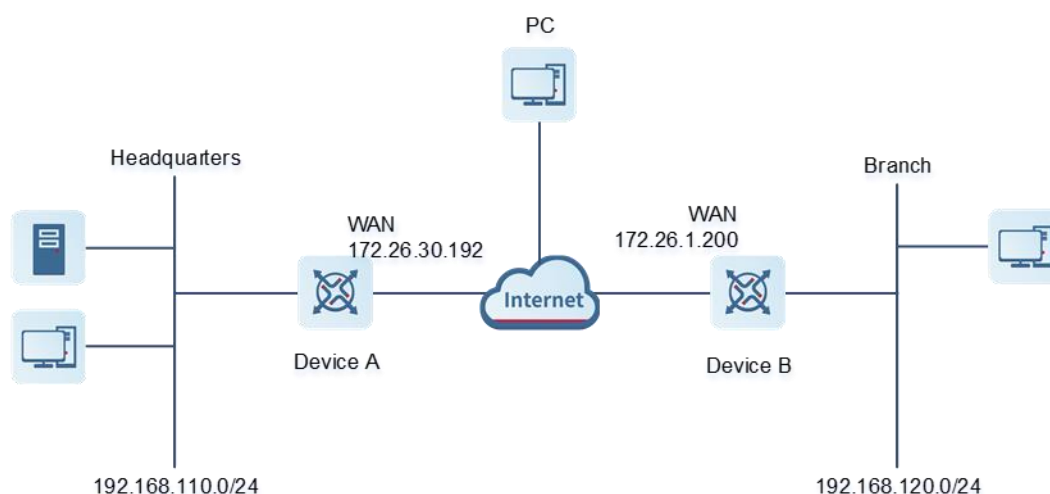

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

3. Configuration Roadmap

- Configure the HQ gateway Device A as the PPTP server.
- Configure the branch gateway Device B as the PPTP client.
- Configure the PC of the traveling employee as the PPTP client.

4. Configuration Steps

- Configure the HQ gateway.

Note

The LAN address of the HQ cannot conflict with that of the branch. Otherwise, resource access will fail.

- (1) Log in to the web management system and choose **One-Device > Gateway > Config > VPN > PPTP > PPTP Settings** to access the PPTP Settings page.
- (2) Turn on the PPTP function, set PPTP Type to Server, enter the local tunnel IP, IP Range, and DNS server address, specify whether to enable MPPE encryption, and click **Save**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Enable ☒

PPTP Type ☒ Server ☐ Client

* Local Tunnel IP

* IP Range (?)

* DNS Server

MPPE ☒ Disable ☐ Enable

Flow Control ☒ Disable ☐ Enable

* PPP Hello Interval (?) seconds

Save

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-18 PPTP server configuration

Parameter	Description
Local Tunnel IP	Enter an IP address not in the LAN network segment. The PC can dial up to access the server through this IP address.
IP Range	Enter an IP address range not in the LAN network segment, which is used to allocate IP addresses to clients.
DNS Server	Enter an available DNS server address.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
MPPE	Specify whether to use MPPE to encrypt the PPTP tunnel. The value must be the same as that on the client. After you enable MPPE, the device security is improved but the bandwidth performance of the device degrades. You are advised to keep MPPE disabled if there are no special security requirements.
Flow Control	Flow control is disabled by default.
PPP Hello Interval	Keep the default settings unless otherwise specified.

- (3) Choose **One-Device > Gateway > Config > VPN > VPN Account** and add PPTP user accounts for the traveling employee and branch employee to access the HQ.

For the traveling employee account, set **Network Mode** to **PC to Router**.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

For the branch employee account, set **Network Mode** to **Router to Router** and **Client Subnet** to the LAN network segment of the branch gateway.

Caution

The LAN network segments of the server and client cannot overlap.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add User



Service Type ⓘ

* Username

* Password

Network Mode ⓘ

* Client Subnet



Status ☒

Cancel

OK

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add User



Service Type ⓘ PPTP

* Username pc@pptp

* Password

Network Mode ⓘ PC to Router

Status ☒

Cancel

OK

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

VPN User List							
Username/Password + Add Delete All Delete Selected							
☐	Username	Password	Service Type	Network Mode	Client Subnet	Status	Action
☐	branch	*****	L2TP	Router to Router	192.168.120.0/24	Enable	Edit Delete
☐	pc@l2tp	*****	L2TP	PC to Router	-	Enable	Edit Delete
☐	branch	*****	PPTP	Router to Router	192.168.120.0/24	Enable	Edit Delete
☐	pc@pptp	*****	PPTP	PC to Router	-	Enable	Edit Delete

Up to 300 entries can be added.

Total 4 < **1** > 10/page

- Configure the branch gateway.

- (1) Log in to the web management system and access the PPTP Settings page.
- (2) Turn on the PPTP function, set PPTP Type to Client, enter the username and password configured on the server, server address, and LAN network segment of the peer, configure IPsec encryption parameters the same as those on the server, and click Save.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Enable ☒

PPTP Type ☐ Server ☒ Client

* Username

* Password

Interface

Tunnel IP ☒ Dynamic ☐ Static

* Server Address

* Server Subnet +

Route All Traffic over VPN



MPPE ☐ Disable ☒ Enable

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-19 PPTP client configuration

Parameter	Description
Username/Password	Enter the username and password configured on the server.
Interface	Select the WAN interface on the client to establish a tunnel with the server.
Tunnel IP	Select Dynamic to automatically obtain the tunnel IP address. You can also select Static and enter an IP address in the address pool of the server.
Server Address	Enter the WAN interface address of the server.
Server Subnet	Enter the LAN network segment (LAN port IP address range) of the server.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Route All Traffic over VPN	Once this feature is enabled, all traffic will be directed through the VPN connection, that is, VPN is configured as the default route.
MPPE	The value must be the same as that on the server.
Working Mode	If the HQ wants to access the LAN of the branch, set this parameter to Router .
PPP Hello Interval	Specify the interval for sending PPP Hello packets after PPTP VPN is deployed. Keep the default settings.

- Configure the PC of the traveling employee.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Note

Configure the PC of a traveling employee as the PPTP client. The following uses the PC running Windows 10 operating system as an example.

Enable ports 1723 (PPTP) and 47 (GRE) on the PC firewall.

- (1) Choose **Settings > Network & Internet > VPN** to access the VPN page.

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

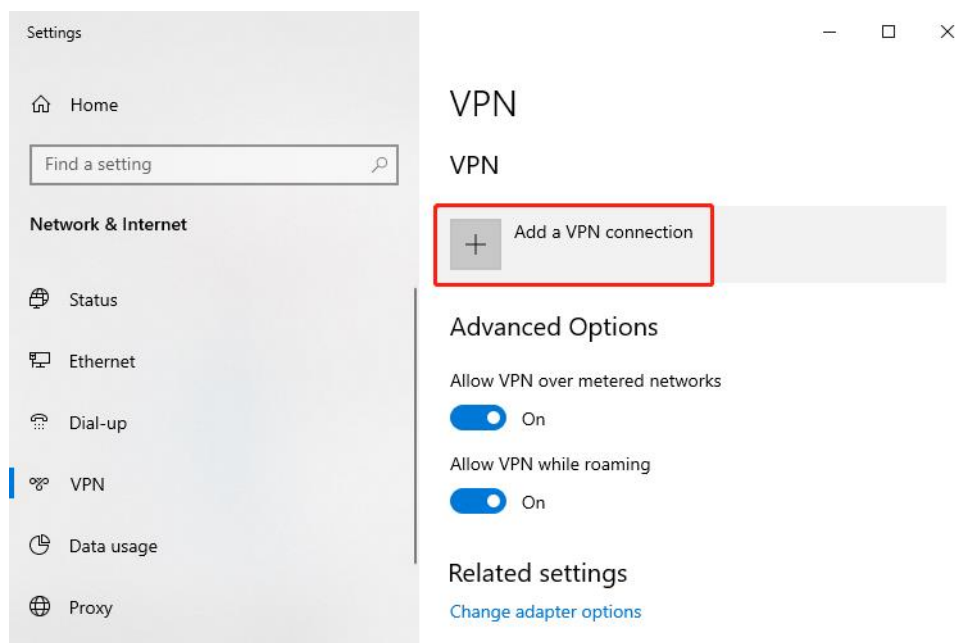

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (2) Click **Add a VPN connection**. In the dialog box that appears, set VPN provider to **Windows** and VPN type to **Point to Point Tunneling Protocol (PPTP)**, enter the connection name and server address or domain name, and click **Save**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Settings

Add a VPN connection

VPN provider
Windows (built-in)

Connection name
PPTP_TEST

Server name or address
172.26.30.192

VPN type
Point to Point Tunneling Protocol (PPTP)

Type of sign-in info
User name and password

Save Cancel

Change advanced sharing options

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.


Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (3) Right-click the created VPN connection named **PPTP_TEST** and select Properties to view the properties of the network connection.

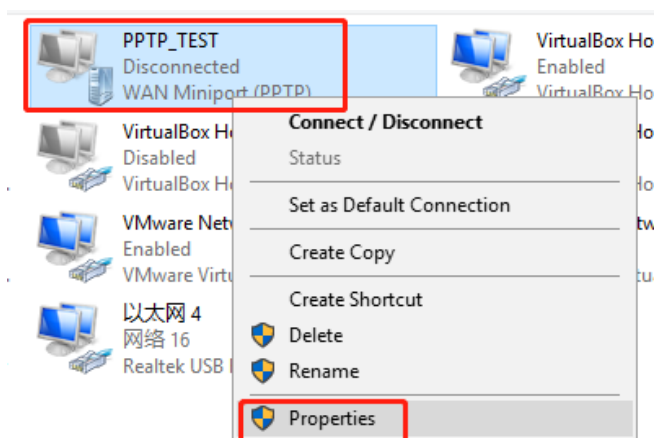

- (4) In the dialog box that appears, click the **Security** tab.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

If MPPE is not enabled on the PPTP server, set **Data encryption** to **Optional encryption** or **No encryption allowed** and use PAP, CHAP, or MS-CHAP v2 for identity authentication, as shown in the following figure on the left.

If MPPE is enabled on the PPTP server, set **Data encryption** to **Require encryption** or **Maximum strength encryption** and use MS-CHAP v2 for identity authentication, as shown in the following figure on the right.

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

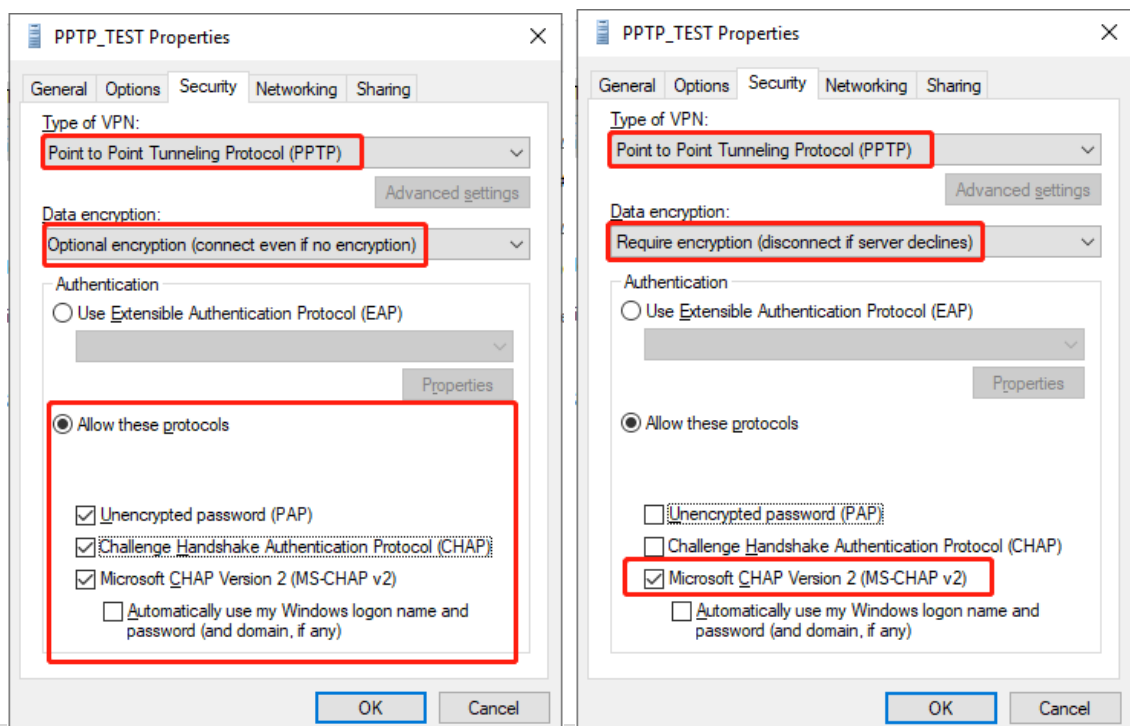

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Note

The device does not support EAP for identity authentication. Therefore, you cannot select EAP-related identity authentication options in the Windows client. Otherwise, the VPN connection fails.

- (5) When the PC functions as a dial-up client, configure the PC by using either of the following methods:
 - o Add a route to the VPN peer network segment on the PC as the administrator.
 - o In the **Properties** dialog box of the local VPN connection, select **Use default gateway on remote network**. After the VPN connection is successful, all data flows from the PC to the Internet are routed to the VPN tunnel. The following figures show the detailed configuration.

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

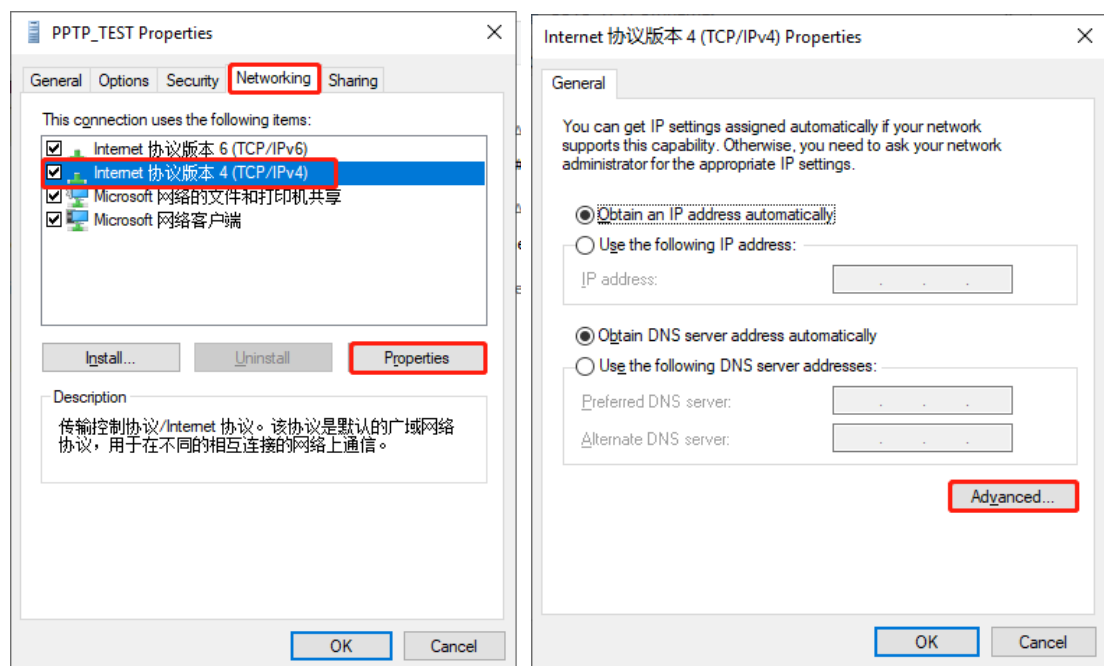

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

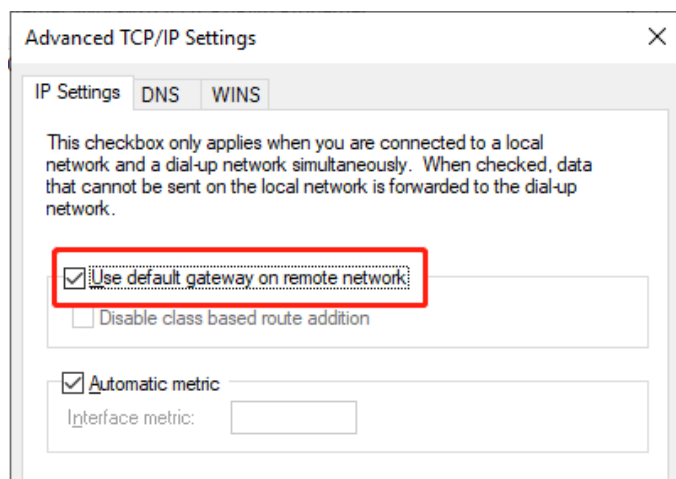

- (6) After the PPTP client configuration is completed on the PC, initiate a VPN connection on the PC. Click the network icon  in the task bar, select the PPTP VPN connection, and click **Connect**. In the dialog box that appears, enter the username and password configured on the server.

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

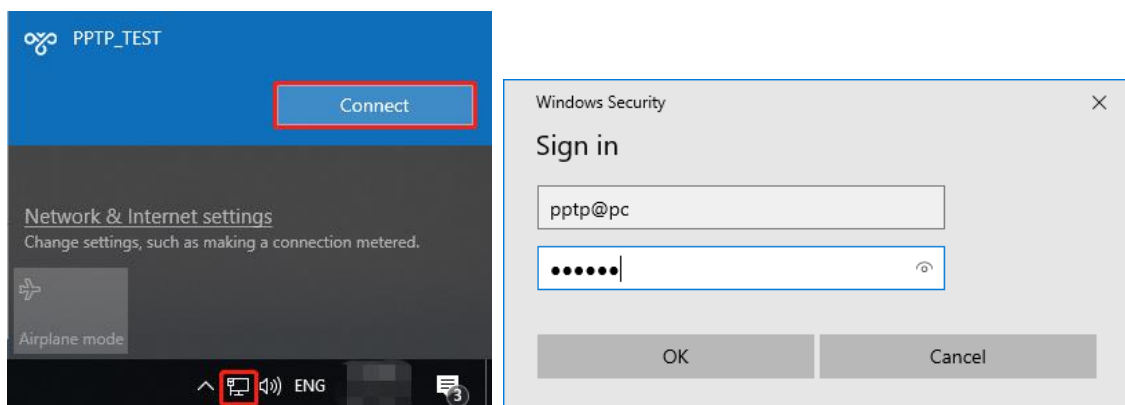

5. Verifying Configuration

- (1) After the server and client are configured, wait for about 1 minute. If you can view the L2TP tunnel connection information on the HQ server and branch client, the connection is successful.

HQ:

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

PPTP Settings Tunnel List

Tunnel List								?
								Delete Selected
☐	Username	Server/Client	Tunnel Name	Virtual Local IP	Access Server IP	Peer Virtual IP	DNS	Action
☐	pc@pptp	Server	ppp2	10.1.1.1	172.26.1.200	10.2.2.3	114.114.114.114	Delete
☐	branch	Server	ppp1	10.1.1.1	172.26.1.200	10.2.2.2	114.114.114.114	Delete

Branch:

Tunnel List								?
								Delete Selected
☐	Username	Server/Client	Tunnel Name	Virtual Local IP	Access Server IP	Peer Virtual IP	DNS	Action
☐	branch	Client	pptp	10.2.2.2	172.26.30.192	10.1.1.1	114.114.114.114	Delete

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (2) Ping the LAN address of the peer from the HQ or branch. The HQ and branch can successfully communicate. The PC of the traveling employee and the PC of the branch employee can access the HQ server.

```
Administrator: C:\Windows\system32\cmd.exe

C:\Users\Administrator>ping 192.168.110.1

Pinging 192.168.110.1 with 32 bytes of data:
Reply from 192.168.110.1: bytes=32 time=2ms TTL=64
Reply from 192.168.110.1: bytes=32 time=2ms TTL=64
Reply from 192.168.110.1: bytes=32 time=2ms TTL=64
Reply from 192.168.110.1: bytes=32 time=2ms TTL=64

Ping statistics for 192.168.110.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 2ms, Average = 2ms
```

11.3.6 Solution to PPTP VPN Connection Failure

- (1) iPhones and other IOS devices do not support PPTP VPN. Please use L2TP VPN instead

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (2) Run the ping command to test the connectivity between the client and server. For details, see Section [13.12.3 Network Tools](#). If the ping fails, check the network connection settings. Check whether the branch EG can ping to HQ EG. If the ping fails. Check the network connection between the two EGs.

Choose **One-Device > Gateway > Config > Diagnostics > Network Tools**. Then, you can start the ping operation. For details, see Section [13.12.3 Network Tools](#).

- (3) Check whether the username and password used by the client are the same as those configured on the server.
- (4) Check whether the WAN interface IP address of your HQ EG is a public network IP address. If not, please configure DMZ on your egress gateway.

11.4 Configuring OpenVPN

Caution

IPTV connection is not supported only in the Chinese environment. To connect to IPTV in the Chinese environment, switch the system language. For details, see Section [13.14 Switching System Language](#).

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

11.4.1 Overview

1. OpenVPN Overview

Due to security considerations or cross-NAT communication needs, private channels need to be established between enterprises or between individual and enterprise. OpenVPN is used to establish Layer 2 or Layer 3 VPN tunnels by using the vNIC. OpenVPN supports flexible client authorization modes, supports authentication through certificate or username and password, and allows users to connect to VPN virtual interfaces through the firewall. It is easier to use than other types of VPN technologies. OpenVPN can run in the Linux, xBSD, Mac OS X, and Windows 2000/XP systems. The device can establish VPN connections to PCs, Android/Apple mobile phones, routers, and Linux devices, and it is compatible with most OpenVPN products in the market.

OpenVPN connections can traverse most proxy servers and can function well in the NAT environment. The OpenVPN server can push the following network configuration to clients: IP address, routes, and DNS settings.

2. Certificate Overview

The major advantage of OpenVPN lies in its high security, but OpenVPN security requires the support of certificates.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

The OpenVPN client supports certificates **ca.crt**, **ca.key**, **client.crt**, and **client.key** and the OpenVPN server supports certificates **ca.crt**, **ca.key**, **server.crt**, and **server.key**.

11.4.2 Configuring the OpenVPN Server

Choose **One-Device > Gateway > Config > VPN > OpenVPN**.

1. Basic Settings

Turn on **Enable** to enable the OpenVPN function, set **OpenVPN Type** to **Server**, set other parameters, and click **Save**. After the basic settings are completed, you can view the tunnel information of the server in the tunnel list.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Enable ☒

OpenVPN Type ☒ Server ☐ Client

Server Mode

Protocol

* Server Address

* Port ID 1-65535

* IP Range

* Deliver Route +

Flow Control ☒ Disable ☐ Enable

Advanced Settings

Client Config

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-20 OpenVPN server basic settings

Parameter	Description
Server Mode	Select a server authentication mode. The options are Account, Certificate, and Account & Certificate. ● Account: Enter the correct username and password and upload the CA certificate on the client to connect to the server. The configuration is simple. ● Certificate: Upload the CA certificate and client certificate and enter the correct private key on the client to connect to the server. ● Account & Certificate: Upload the CA certificate and client certificate and enter the correct username, password, and private key. This mode is applicable to scenarios with high security requirements.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Protocol	Select a protocol for all OpenVPN communications based on a single IP port. The options are UDP and TCP . The default value is UDP , which is recommended. When you select a protocol, pay attention to the network status between two encrypted tunnel ends. If high latency or heavy packet loss occurs, select TCP as the underlying protocol.
Server Address	Specify the server address for client connection. You can set this parameter to a domain name.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Port ID	Specify the port used by the OpenVPN service process. Internet Assigned Numbers Authority (IANA) specifies port 1194 as the official port for the OpenVPN service. If the port is in use or disabled in the local network, the server log prompts port binding failure and you are asked to change the port number.
IP Range	Specify the network segment of the OpenVPN address pool. The first available in the address pool is allocated to the server, and the other addresses are allocated to clients. For example, if this parameter is set to 10.80.12.0/24 , the VPN virtual address of the server is 10.80.12.1.
Deliver Route	Specify the VPN dial-up line for clients to access the LAN network segment of the server. The server informs clients that want to access the server LAN of the route information. You can configure a maximum of three routes.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Flow Control	The VPN server has a lower priority to control the traffic of the client than the custom policy. The VPN server can only limit the maximum uplink and downlink bandwidth per user for the client. For details, see Section 9.6.2 Smart QoS .

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Client Config	Click Export to export the parameter configuration of the client connected to the server in the .tar compressed package. The decompressed information is used for setting the OpenVPN client. In account mode, the compressed package contains the configuration file client.ovpn, CA certificate ca.crt, and CA private key ca.key. If certificate authentication is configured, the compressed package contains the configuration file client.ovpn, CA certificate ca.crt, CA private key ca.key, client certificate client.crt, and client private key client.key. If TLS authentication is enabled, the compressed package contains the TLS identity authentication key tls.key apart from the preceding files. For details on TLS authentication, see Advanced Settings.

1 Configuration Guide

SD-WAN

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Server Log	Click Export to export server log files, including the server start time and client dial-up logs.

Caution

The IP address range of the device cannot overlap the network segment of the LAN port on the device.

2. Advanced Settings

Click **Advanced Settings** to configure the advanced parameters. Keep the default settings unless otherwise specified.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

TLS Authentication  

Allow Data Compression 

Route All Traffic over VPN



Cipher 

Deliver DNS  

Auth

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-21 OpenVPN server advanced settings

Parameter	Description
TLS Authentication	Specify the TLS key for enhanced OpenVPN security by allowing the communicating parties to possess the shared key before TLS handshake. After TLS authentication is enabled, you must import the TLS key on the client. (The version of the peer OpenVPN client must be higher than 2.40.)
Allow Data Compression	Specify whether to enable data compression. If this function is enabled, transmitted data is compressed using the LZO algorithm. Data compression saves bandwidth but consumes certain CPU resources. The setting on the client must be the same as that on the server. Otherwise, the connection fails.
Route All Traffic over VPN	Specify whether to route all traffic over VPN. After this function is enabled, all the traffic is routed over the VPN tunnel. This means that the VPN tunnel is the default route.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Cipher	Select the data encryption mode before data transmission to ensure that even data packets are intercepted during transmission, the leaked data cannot be interpreted. If this parameter is set to Auto on the server, you can set this parameter to any option on the client. If a specific encryption algorithm is configured on the server, you must select the same encryption algorithm on the client. Otherwise, the connection fails.
Deliver DNS	Specify the DNS server address pushed by the server to clients. Currently, the device can push the DNS server address to Windows clients only.
Auth	Specify the MD5 algorithm used by the server. The server will inform the clients of this information. The default value is SHA1 .

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

3. Configuring OpenVPN User

Choose **One-Device > Gateway > Config > VPN > VPN Account**.

Only user accounts added to the VPN client list are allowed to dial up to connect to the OpenVPN server. Therefore, you need to manually configure user accounts for clients to access the OpenVPN server.

Click **Add**. In the dialog box that appears, set **Service Type** to **OpenVpn**, enter the username and password, and click **OK**. The **Status** parameter specifies whether to enable the user account.

VPN User List							
				Username/Password		+ Add	
						Delete All	
						Delete Selected	
☐	Username	Password	Service Type ?	Network Mode ?	Client Subnet ?	Status	Action
☐	branch	*****	L2TP	Router to Router	192.168.120.0/24	Enable	Edit Delete
☐	pc@l2tp	*****	L2TP	PC to Router	-	Enable	Edit Delete

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add User



Service Type (?)

* Username

* Password

Status ☒

Cancel

OK

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

11.4.3 Configuring the OpenVPN Client

Choose **One-Device > Gateway > Config > VPN > OpenVPN**.

Currently, you can configure the device as the OpenVPN client in either of the following methods:

Web Settings: Configure OpenVPN client on the web page. This method is used when the device is connected to a non-EG server.

Import Config: Manually import the configuration file. This method is used when the device is connected to a similar device. The client configuration file **client.ovpn** can be directly exported from the connected OpenVPN server.

Enable ☒

OpenVPN Type ☐ Server ☒ Client

Client Config ☒ Import Config ☐ Web Settings

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

1. Import Config

Turn on **Enable** to enable the OpenVPN function, set **OpenVPN Type** to **Client** and **Client Config** to **Import Config**, select a server mode, set relevant parameters, and click **Browse** to import the client configuration file. Then, click **Save** to make the configuration take effect.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Enable ☒

OpenVPN Type ☐ Server ☒ Client

Client Config ☒ Import Config ☐ Web Settings

Server Mode

* Username

* Password

Client Config It already exists.

Save

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-22 OpenVPN client configuration in Import Config method

Parameter	Description
Server Mode	Select a server authentication mode. The options are Account, Certificate, Account & Certificate and Pre-Shared Key. ● Account: Enter the correct username and password and upload the CA certificate on the client. The CA certificate information is embedded in the client configuration file. ● Certificate: Upload the CA certificate and client certificate and enter the correct private key on the client. All the information is embedded in the client configuration file. ● Account & Certificate: Enter the correct username, password, and private key and upload the CA certificate, and client certificate on the client. The information of the CA certificate, client certificate, and private key is embedded in the client configuration file. ● Static Key: Upload the pre-shared key file apart from the client configuration file.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Username/Password	Enter the username and password configured on the server.
Client Config	Click Browse , select the client configuration file exported from the server, and upload the file.
Pre-Shared Key	This parameter is available only when Server Mode is set to Static Key . Click Browse , select the pre-shared key file, and upload the file.
Working Mode	This parameter is available only when Server Mode is set to Static Key . ● NAT: The client can access the server network, but the server cannot access the client network. ● Router: The server can access the client network.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

2. Web Settings

Turn on **Enable** to enable the OpenVPN function, set **OpenVPN Type** to **Client** and **Client Config** to **Web Settings**, configure parameters such as **Device Mode** and **Device Mode**, and click **Save** to make the configuration take effect.

- (1) Basic Settings

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Enable ☒

OpenVPN Type ☐ Server ☒ Client

Client Config ☐ Import Config ☒ Web Settings

Device Mode TUN

Server Mode Account

* Username ? openvpn

* Password ?

Protocol UDP

* Server Address IP/Domain

* Server Port ID 1194

1-65535

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-23 OpenVPN client configuration in Web Settings method

Parameter	Description
Device Mode	Specify the mode of the EG device that functions as a client. The options are TUN and TAP . The value must be the same as that configured on the server. When the EG device works as a server, it supports the TUN mode only.
Server Mode	Select a client authentication mode. The options are Account , Certificate , and Account & Certificate . ● Account: Enter the correct username and password and upload the CA certificate on the client. ● Certificate: Upload the correct CA certificate, client certificate, and private key file on the client. ● Account & Certificate: Enter the correct username and password, and upload the CA certificate, client certificate, and private key file on the client.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Username/Password	Enter the username and password configured on the server.
Protocol	Select the protocol running on the device. The options are UDP and TCP . The value must be the same as that configured on the server.
Server Address	Enter the address or domain name of the server to be connected.
Server Port ID	Enter the port number of the server to be connected.
CA Certificate	Click Browse , select the CA certificate file with the file name extension .ca , and upload the file.
Client Key	Click Browse , select the client private file with the file name extension .key , and upload the file.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Client Certificate	Click Browse , select the client certificate file with the file name extension .crt , and upload the file.
Client Certificate Key	Specify the client certificate key if the client certificate provided by the server (such as the MikroTik server) is encrypted twice.

(2) Advanced Settings

Click **Advanced Settings** to configure the advanced parameters. Keep the default settings unless otherwise specified.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Advanced Settings

Use Explicit Signature for Server Certificate ?

☒

TLS Authentication ?

☐

Cipher ?

AES-128-CBC

▼

Auth ?

SHA1

▼

Allow Data Compression ?

Yes

▼

Use Route Pushed by Server ?

Yes

▼

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-24 OpenVPN client configuration in Web Settings method

Parameter	Description
Use Explicit Signature for Server Certificate	Specify whether to verify the server certificate using explicit signature. By default, this function is enabled. If the server certificate does not use explicit signature, for example, the MikroTik server, you need to disable this function. Otherwise, the connection fails.
TLS Authentication	Specify whether to enable TLS authentication for the server. If this function is enabled, you need to upload the TLS certificate file.
Cipher	Select a data compression algorithm. The value must be the same as that configured on the server. Otherwise, the connection fails.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Auth	Select an MD5 algorithm for data packet verification. The options are SHA1 , MD5 , SHA256 , and NULL . The value must be the same as that configured on the server. Otherwise, the connection fails.
Allow Data Compression	Specify whether to allow data compression. After this function is enabled, the transmitted data can be compressed by using the LZO algorithm. The value must be the same as that configured on the server.
Use Route Pushed by Server	Specify whether to use the routes pushed by the server. If this function is disabled, the device cannot accept the routes pushed by the server. If the server needs to access LAN devices, you must set this parameter to Yes .

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

11.4.4 Viewing the OpenVPN Tunnel Information

Choose **One-Device > Gateway > Config > VPN > OpenVPN > Tunnel List**.

After the server and client are configured, you can view the OpenVPN tunnel connection status. If the tunnel is established successfully, the client tunnel information is displayed in the tunnel list of the server.

[Export Log File](#)

☐	Username	Server/Client	Status	Real IP Address	Virtual IP Address
☐	openvpn	Server	OK	10.52.48.43	10.80.12.1

Total 1 < 1 > 10/page

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-25 OpenVPN tunnel information

Parameter	Description
Username	Indicate the username used by the client for identity authentication. By default, the username displayed on the server is openvpn .
Server/Client	Indicate the role of the local end of the tunnel, which can be client or server.
Status	Indicate the tunnel establishment status.
Real IP Address	Indicate the real IP address used by the local end to connect to the VPN.
Virtual IP Address	Indicate the local virtual IP address of the tunnel. The virtual IP address of the OpenVPN client is allocated by the OpenVPN server.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

11.4.5 Typical Configuration Example

1. Networking Requirements

The enterprise wants to allow the client network to dial up to the server through OpenVPN, implementing mutual access between the server and client.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.


Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

2. Networking Diagram

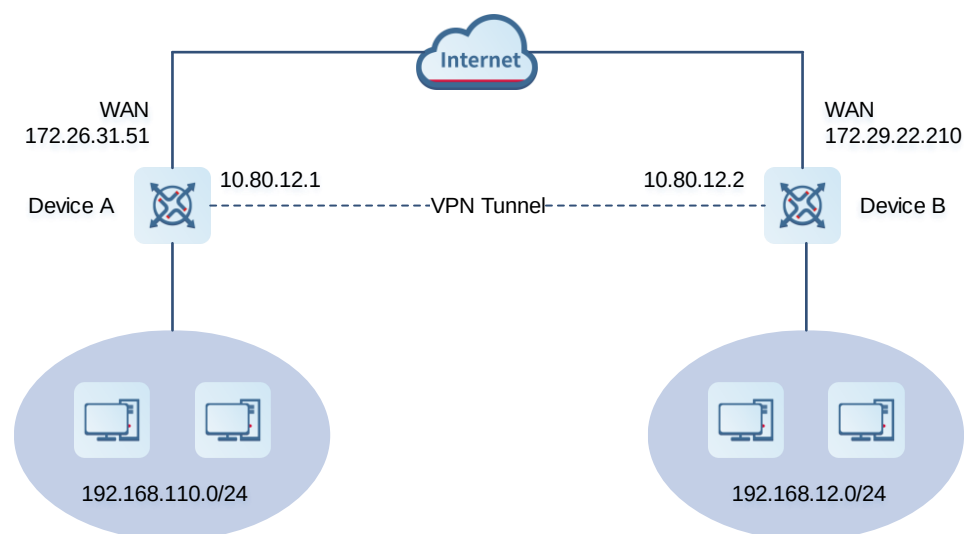

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

3. Configuration Roadmap

- Configure Device A as the OpenVPN server.
- Configure Device B as the OpenVPN client.
- The server needs to push the local LAN network segment to the client to allow the client to access the server in the LAN.

4. Configuration Steps

- Configure Device A.
- (1) Log in to the web management system and choose **One-Device > Gateway > Config > VPN > OpenVPN > OpenVPN** to access the OpenVPN page.
 - (2) Turn on Enable to enable the OpenVPN function, set OpenVPN Type to Server, select a server mode and protocol, enter the port number (1194 by default) and server address (external IP address of the local device), and click **Save**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Enable ☒

OpenVPN Type ☒ Server ☐ Client

Server Mode

Protocol

* Server Address

* Port ID 1-65535

* IP Range

* Deliver Route +

Flow Control ☒ Disable ☐ Enable

advanced Setting

Client Config

Export

Save

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-26 OpenVPN server configuration

Parameter	Description
Server Mode	Select an authentication mode. In this example, select Account . In scenarios with high security requirements, select Account & Certificate .
Protocol	Select UDP unless otherwise specified. When the network status between two encrypted tunnel ends is poor, such as high latency or heavy packet loss, select TCP .
Server Address	Enter the WAN interface address of the server, which is 172.26.31.51 .
Port ID	The default value is 1194 . Keep the default value unless otherwise specified. If the port is in use or disabled in the current network, change to an available port number.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
IP Range	Specify the network segment of the OpenVPN address pool. The first available in the address pool is allocated to the server, and the other addresses are allocated to clients. For example, if this parameter is set to 10.80.12.0/24 , the VPN virtual address of the server is 10.80.12.1.
Deliver Route	Add routes to the corresponding network segment if the client wants to the LAN network segment where the server resides.

- (3) Click **Advanced Settings** to configure more advanced parameters. If the device connects to other EG devices in the Reye network, you are advised to keep the default values for advanced settings. If the device connects to devices from another vendor, keep the parameter settings consistent on the connected devices.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

TLS Authentication  ☐

Allow Data Compression 

Yes 

Route All Traffic over VPN 

No 

Cipher 

AES-128-CBC 

Deliver DNS 

Example: 1.1.1.1 

Auth

SHA1

- (4) Click **Export** to export the compressed package of the client parameter configuration. Download the compressed package to the local device and decompress it for setting the OpenVPN client in subsequent steps.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Client Config



Export

- (5) Choose **One-Device > Gateway > Config > VPN > VPN Account** and add an OpenVPN user account.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add User



Service Type (?)

* Username

* Password

Status ☒

Cancel

OK

● Configure Device B

- (1) Log in to the web management system and access the OpenVPN page.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (2) Turn on Enable to enable the OpenVPN function and set OpenVPN Type to Client. Two methods are available for configuring the client. The Import Config method is recommended.
 - o **Import Config:**

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Enable ☒

OpenVPN Type ☐ Server ☒ Client

Client Config ☒ Import Config ☐ Web Settings

Server Mode

* Username

* Password

Client Config [It already exists.](#)

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

OpenVPN client configuration in Import Config method

Parameter	Description
Client Config	Select Import Config .
Server Mode	The value must be the same as that on the server. In this example, select Account .
Username & Password	Enter the username and password configured on the server.
Client Config	Click Browse , select the client configuration file exported from the server, and upload the file.

- **Web Settings:**

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Enable ☒

OpenVPN Type ☐ Server ☒ Client

Client Config ☐ Import Config ☒ Web Settings

Device Mode

Server Mode

* Username

* Password

Protocol

* Server Address

* Server Port ID 1-65535

----- Advanced Settings -----

CA Certificate

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

OpenVPN client configuration in Web Settings method

Parameter	Description
Client Config	Select Web Settings .
Device Mode	The value must be the same as that on the server. In this example, select TUN .
Server Mode	The value must be the same as that on the server. In this example, select Account .
Username & Password	Enter the username and password configured on the server.
Protocol	The value must be the same as that on the server. In this example,

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
	select UDP .
Server Address	Enter the public network IP address of the server, which is 172.26.31.51 .
Server Port ID	Enter the port number used by the server, such as 1194 .

Import the corresponding files according to the value of **Server Mode**.

If **Server Mode** is set to **Certificate** or **Account & Certificate**, you need to import the CA certificate file, client certificate file, and client private key file. If **Server Mode** is set to **Account**, you only need to import the CA certificate file. If the client certificate is encrypted, you also need to enter the pre-shared key specified by **Client Certificate Key**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

CA Certificate	.crt	Browse
Client Key	.key	Browse
Client Certificate	.crt	Browse
Client Certificate Key		?

Click **Advanced Settings** to configure more parameters. Configure **Use Route Pushed by Server** to specify whether to accept routes pushed by the server. The value must be the same as that on the server. If the client is connected to a non-EG device, such as MikroTik server outside China, you need to turn off **Use Explicit Signature for Server Certificate**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

----- Advanced Settings -----

Use Explicit Signature for ☒
Server Certificate ?

TLS Authentication ? ☐

Cipher ? AES-128-CBC ▾

Auth ? SHA1 ▾

Allow Data Compression ? Yes ▾

Use Route Pushed by Yes ▾
Server ?

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (3) After the configuration is completed, click Save to make the configuration take effect.

5. Verifying Configuration

After the server and client are configured, view the two tunnel end information in the tunnel list.

- Client:

[Export Log File](#)

Username	Server/Client	Status	Real IP Address	Virtual IP Address
OpenVpnUser1	Client	Connecting...	10.52.48.43	

Total 1 < **1** > 10/page

- Server:

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

[Export Log File](#)

Username	Server/Client	Status	Real IP Address	Virtual IP Address
openvpn	Server	OK	10.52.48.43	10.80.12.1

Total 1 < 1 > 10/page

11.5 Configuring WireGuard VPN

11.5.1 Overview

1. WireGuard VPN Overview

Conventional VPN protocols such as OpenVPN and IPsec have certain limitations, such as slow connection speed due to the complexity of the encryption and encapsulation processes. This is where WireGuard VPN comes in. It is a new OpenVPN protocol and is widely recognized for its high efficiency, security, and ease of use.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

WireGuard operates at Layer 3 of the Open System Interconnection (OSI) model and supports IPv4 and IPv6. Simplified design and encryption technologies of WireGuard minimize system overhead, delivering high-speed connections and resulting in lower latency.

WireGuard follows the principles of simplicity and uses modern encryption technologies. Its working principle is as follows:

- (1) **Key exchange and handshake:** When a client initiates a connection request to the remote server, key exchange is performed. Public and private key pairs are generated for each of the client and server, which exchange public keys to establish a secure communication channel.
- (2) **Tunnel creation:** WireGuard creates a virtual network interface on each of the client and server and establishes an encrypted tunnel to transmit data packets.
- (3) **Data packet transmission:** The sender uses the public key of the receiver to encrypt data packets.
- (4) **Decryption:** After receiving encrypted data packets, the receiver uses its own private key to decrypt the data packets.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

2. Applicable Scenarios

WireGuard VPN on the Ruijie Reyee RG-EG series gateways supports client and server configurations and displays the tunnel link after a successful connection. WireGuard VPN is applicable to the following scenarios:

- End-to-end VPN: connects two or more network nodes to enable communication, data sharing, and resource access between networks. In this scenario, an RG-EG gateway can function as the server or client of WireGuard VPN and interconnect with another RG-EG gateway or a third-party device.
- Mobile access VPN: allows mobile users to securely access specified network resources from anywhere. In this scenario, the RG-EG gateway can serve as the WireGuard VPN server, and mobile devices connect to the VPN through the configuration of the WireGuard VPN client.

11.5.2 Configuring the WireGuard VPN Server

Caution

- A WireGuard VPN server must have a public IP address. Otherwise, a VPN tunnel cannot be established.
 - Intranet access supports only IPv4.
-

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.


Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management


Choose **One-Device > Gateway > Config > VPN > WireGuard VPN > WireGuard VPN Server**.

- (1) Click **Add** on the right of **Policy List**.

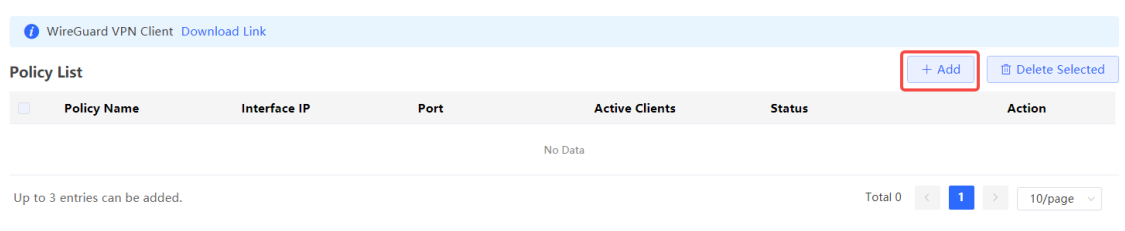

The screenshot shows the 'WireGuard VPN Client' interface. At the top, there is a 'Download Link' button. Below it is the 'Policy List' section, which contains a table with columns: Policy Name, Interface IP, Port, Active Clients, Status, and Action. The table is currently empty, displaying 'No Data'. To the right of the table, there is a '+ Add' button (highlighted with a red box) and a 'Delete Selected' button. Below the table, there is a message 'Up to 3 entries can be added.' and a pagination control showing 'Total 0', a page number '1' (highlighted in blue), and '10/page'.

- (2) Set **Policy Name** and toggle on **Status**.



The screenshot shows the 'Policy Name' field, which is a text input box with a red asterisk indicating it is required. Below it is the 'Status' field, which is a toggle switch currently set to 'On' (blue).

- (3) Set related parameters of the server.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Local Configuration

* Server IP ?	IP/Domain
* Port	
* Public Key	qC...ivoz  
* Private Key	<input "="" type="text" value="CE...mA="/>
* Interface IP ?	
* DNS Server ?	

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-27 Local Configuration Parameters of a WireGuard VPN Server

Parameter	Description
Server IP	Specify a public IP address or a domain name of a VPN server to establish a connection with a VPN client.
Port	Specify the port number on which a VPN server listens. The port number is used to receive connection requests from a VPN client. WireGuard uses UDP by default and the default port number is 51820.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Public Key	Specify the public key of a server. The public key is used to encrypt data packets transmitted in a VPN tunnel. During the exchange of WireGuard keys, the public key of a server will be sent to a client so that the client can securely send information to the server. The public and private keys are automatically generated by the system. You can click the copy icon to copy the public key of the server, and click the refresh icon to generate a new public and private key pair. * Public Key q' ivo' Copy Refresh * Private Key C <input "="" type="text" value="ZvmA="/>
Private Key	Specify the private key of a server. The private key is used to decrypt encrypted information received from a client and encrypt information to be sent to the client.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Interface IP	Specify the IP address of a tunnel interface on a server, which is used to identify the server connected to a VPN tunnel. A client will communicate with the server with this IP address.
DNS Server	Specify the DNS server for resolving a domain name when Server IP is set to the domain name.

- (4) In the **Client** area, click **Add** to add a client.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Client

+ Add

Delete Selected

☐	Username	Interface IP	Action
No Data			

Cancel

OK

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management



* Username

* Interface IP

* Public Key  

Accessible IP Range ☒ Interface IP only ☐ Custom



Pre-Shared Key  

Download Config File

File



To connect to the client automatically, download the VPN configuration file and upload it to the client for VPN setup.

[Download](#)



Multiple WireGuard clients should not share the same VPN configuration file.



Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Click **OK** to save the configuration. A prompt is displayed. After a client is added, the **Download Config File** function is unavailable.

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

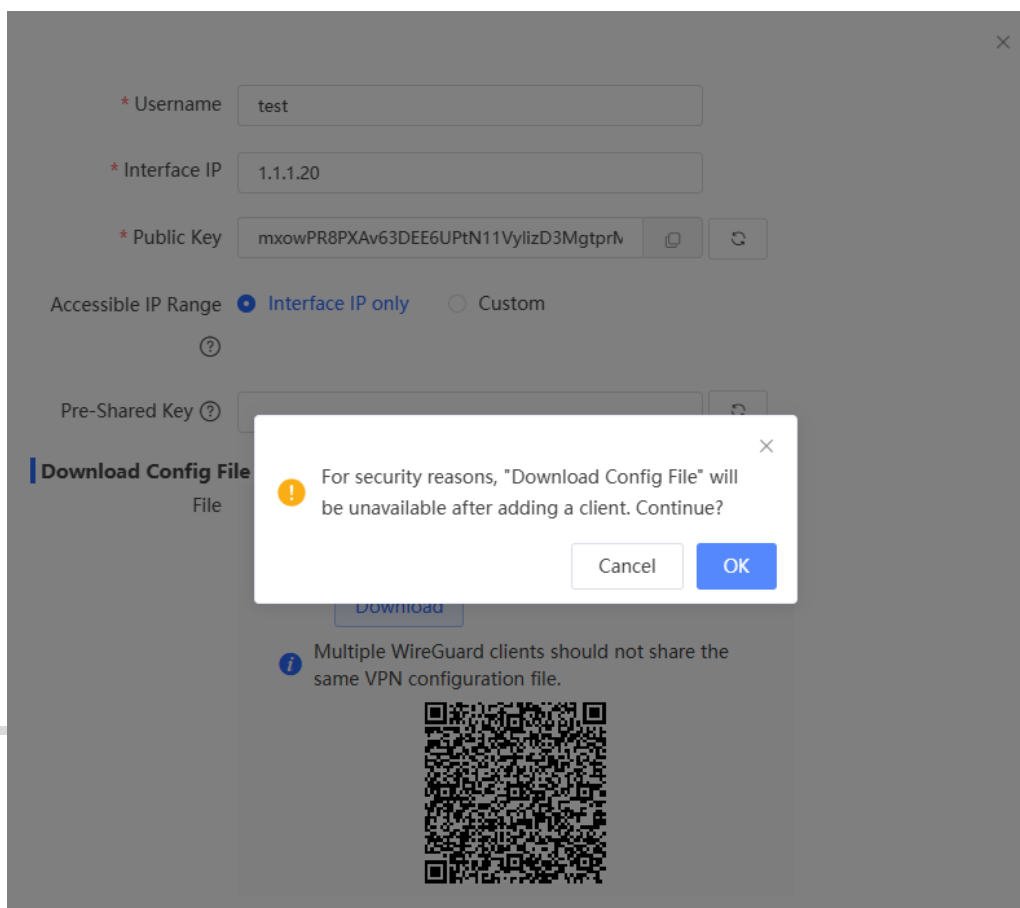

The screenshot displays the Ruijie Cloud configuration interface. The main form includes fields for Username (test), Interface IP (1.1.1.20), and Public Key (mxowPR8PXA63DEE6UPtN11VylzD3Mgtprlv). Below these fields are radio buttons for Accessible IP Range, with 'Interface IP only' selected. A Pre-Shared Key field is also visible. A 'Download Config File' button is present, but a modal dialog box is overlaid on top of it. The dialog box contains a warning icon and the text: 'For security reasons, "Download Config File" will be unavailable after adding a client. Continue?'. The dialog has 'Cancel' and 'OK' buttons. At the bottom of the interface, there is a QR code and a note: 'Multiple WireGuard clients should not share the same VPN configuration file.'

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-28 Parameters of Adding a Client on a WireGuard VPN Server

Parameter	Description
Username	Specify the client identifier, which is used to identify a client during the authentication. A username is typically unique to identify a client.
Interface IP	Specify the IP address of a tunnel interface on a client. The IP address is used to identify the client connected to a VPN tunnel.
Public Key	Specify the public key of a client, which is used to encrypt data packets transmitted in a VPN tunnel.
Accessible IP Range	Specify the client IP address range that is allowed to access a server. ● Interface IP only: Access is allowed only through the interface IP address, that is, only the client with the interface IP address can access the server. ● Custom: You can add the intranet addresses of the clients so that they can also access the server.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Pre-Shared Key	Specify a pre-shared key, which improves link security. The keys on the client and server must be consistent.
Download Config File	Click Download to download the configuration file. After the configuration file is uploaded to the clients, the configuration is automatically complete. After the configuration is complete on the clients, the QR code is displayed. The content of the QR code is the same as that of the exported configuration file, which facilitates the configuration of mobile clients by scanning the QR code. Multiple WireGuard clients should not share the same VPN configuration file.

11.5.3 Configuring a WireGuard VPN Client

Choose **One-Device > Gateway > Config > VPN > WireGuard VPN > WireGuard VPN Client**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.


Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (1) Click **Add** on the right of **Policy List**.

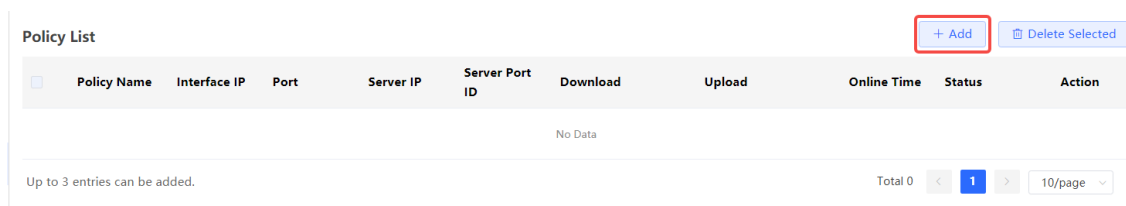

- (2) Set **Policy Name** and toggle on **Status**.



- (3) Set **Configuration Mode**.

- o Manual: Manually enter the configuration parameters related to the client and server.

Configuration Mode ☒ Manual ☐ File

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- o File: Click **Select**, select the configuration file downloaded from the server, and complete the configuration automatically.

Configuration Mode ☐ Manual ☒ File

Select

- (4) Configure the client parameters.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Local Configuration

* Interface IP (?)

* Port

* Public Key

oXK3jvsSsCb/JqPyJc+gEF2ZCbqvyRkAFPJhtV

* Private Key

YDhhjnQ5u23CmcWsrJRYaeaf/FC9fAedVP2Bi83OAH,

* Bound Interface (?)

Auto

DNS Server (?)

Accessible IP Range

☐ All (?)

☒ Custom

(?)

* Primary IP/Mask

Add

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 11-29 Local Configuration Parameters of a WireGuard VPN Client

Parameter	Description
Interface IP	Specify the IP address of a tunnel interface on a client. The IP address is used to identify the client connected to a VPN tunnel.
Port	Specify the UDP port number used by the client to communicate with the VPN server. The value must be the same as that configured on the server.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Public Key	Specify the public key of a client, which is used to encrypt data packets transmitted in a VPN tunnel. During the WireGuard key exchange, the public key of a client will be sent to a server so that the server can securely send information to the client. The public and private keys are automatically generated by the system. You can click the copy icon to copy the public key of the client, and click the refresh icon to generate a new public and private key pair. * Public Key e...   * Private Key 4...

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Private Key	Specify the private key of the client. The private key is used to decrypt encrypted information received from the server and encrypt information to be sent to the server.
Bound Interface	In the scenario of multiple WAN ports, you can configure this parameter to specify the outbound interface of VPN traffic. You are advised to set this parameter to Auto .
DNS Server	Specify the DNS server for resolving a domain name when Server IP is set to the domain name.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Accessible IP Range	Specify the IP address range of a server to be accessed by a client. ● All: Force the client-generated IPv4 traffic to be routed through the VPN tunnel. ● Custom: You can add the intranet address of the server so that data is transmitted through a VPN tunnel only when the client accesses the corresponding network segment.

- (5) Set related parameters of the server.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Server Config

* Server IP ?

* Port

* Public Key

Table 11-30 Server Config Parameters on a WireGuard VPN Client

Parameter	Description
Server IP	Specify a public IP address or a domain name of a VPN server to establish a connection with a VPN client.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Port	Specify the port number on which a VPN server listens. The port number is used to receive connection requests from a VPN client. The value must be the same as that on the server.
Public Key	Specify the public key of a server. The public key is used to encrypt data packets transmitted in a VPN tunnel. The value must be the same as that on the server.

- (6) (Optional) Click **Advanced Settings** to set advanced parameters.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

----- Advanced Settings -----

Pre-Shared Key (?)

* Heartbeat Interval s (?)

Table 11-31 Advanced Settings Parameters on a WireGuard VPN Client

Parameter	Description
Pre-Shared Key	Specify the key shared by both communication parties for authentication and encrypted communication in advance. The key is used to enhance the security of the handshake process. The value must be the same as that configured on the server.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Heartbeat Interval	Specify the interval at which a client sends heartbeat packets to a server, which is used to detect the connection liveliness. If the server does not receive any heartbeat signal from the client within the specified interval, the connection is considered to be disconnected and is closed.

- (7) Click **OK**.

11.5.4 Checking the Status of a WireGuard VPN Connection

1. Checking the Server Connection Status

Choose **One-Device > Gateway > Config > VPN > WireGuard VPN > WireGuard VPN Server**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

WireGuard VPN Client [Download Link](#)

Policy List

+ Add

Delete Selected

☐	Policy Name	Interface IP	Port	Active Clients	Status	Action
				No Data		

Up to 3 entries can be added.

Total 0 < 1 > 10/page

Active Clients indicates the number of clients that have successfully connected to the server. Click the number in the **Active Clients** column to display the real-time upload and download rates of a client. **Online Time** indicates the last time of a successful handshake between the server and client.

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

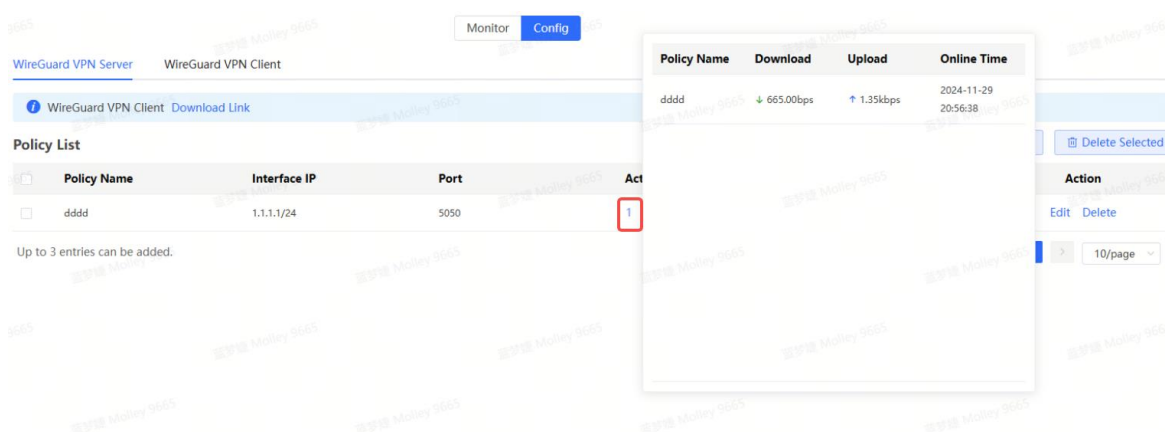

2. Checking the Client Connection Status

Choose **One-Device > Gateway > Config > VPN > WireGuard VPN > WireGuard VPN Client**.

If a client successfully connects to a server, upload and download rates as well as the onboarding time are displayed in the policy list.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede22ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Policy List										+ Add Delete Selected	
☐	Policy Name	Interface IP	Port	Server IP	Server Port ID	Download	Upload	Online Time	Status	Action	
No Data											
Up to 3 entries can be added.										Total 0	1 10/page

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

12 SD-WAN

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

13 System Management

13.1 System Logs

For medium to large-scale network projects, network administrators often use third-party software to interface with all devices, monitoring system metrics and identifying any abnormal behavior to ensure system health and security. Devices usually support network management protocols such as SNMP and Syslog for seamless integration.

13.1.1 Viewing System Logs

Go to the configuration page.

- In SON mode:
 - Choose **Network-Wide** > **System** > **Syslog**.
 - Choose **One-Device** > **Config** > **System** > **Syslog**.
- In standalone mode: Choose **System** > **Syslog**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

The **Log List** displays the operation logs of the local device. You can filter the logs by specific dates or modules on the **View Log** page. You can also export the log list and log files to your local system for storage, viewing, or backup.

Device Router

Batch Config

Log List

Export Log List

Start Time - End Time

Search by Module/Message ID/S

Time	Module	Message ID	Severity	Description
2024-09-30 16:13:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:12:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 94
2024-09-30 16:11:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:10:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:09:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:08:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:07:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 92
2024-09-30 16:06:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:05:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 94
2024-09-30 16:04:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 96

Total 1024 1 2 3 4 5 6 ... 103 10/page

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.


Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- On the **Syslog** page in Network-Wide mode, you can view the logs of specific devices.

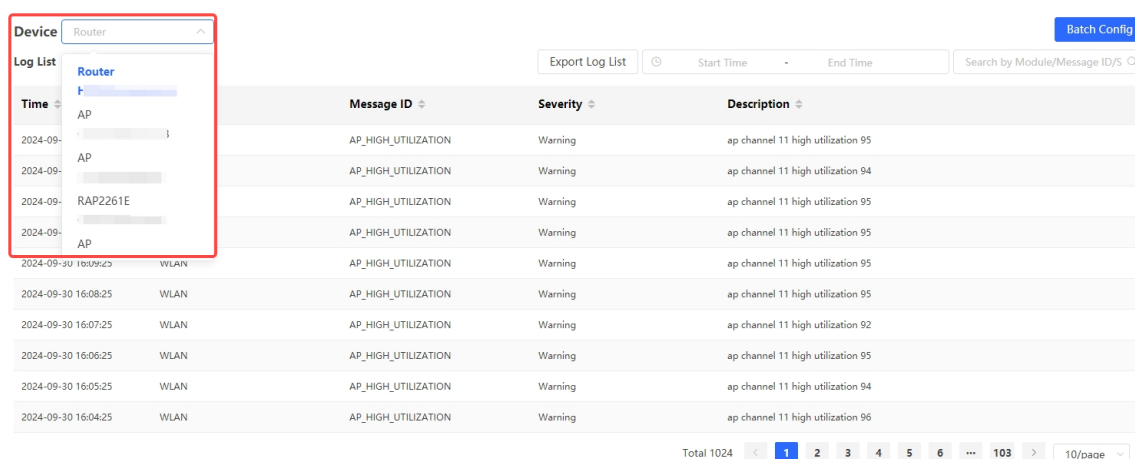

Time	Message ID	Severity	Description
2024-09-30 16:09:23	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:08:25	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 94
2024-09-30 16:07:25	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:06:25	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:05:25	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:04:25	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 96

- To view logs for a specific date, click **Start Time**, select the start and end time, and then click **OK** to filter the logs accordingly.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

The screenshot displays the 'Log List' section of the Ruijie Cloud management interface. At the top, there is a 'Device' dropdown menu set to 'Router' and a 'Batch Config' button. Below this is a search bar with 'Export Log List' and a date range selector (Start Time - End Time). The main area contains a table with columns: Time, Module, Message ID, and Severity. The table lists several log entries for 'WLAN' modules with 'AP_HIGH_UTILIZATION' messages, all marked as 'Warning'. To the right of the table is a calendar interface for selecting dates. The calendar shows '2024 September' and '2024 October'. The date '2024-09-10' is selected. Below the calendar, there is a 'Clear' button and an 'OK' button. At the bottom, there is a pagination bar showing 'Total 1024' and a page number '1' out of '103'.

Time	Module	Message ID	Severity
2024-09-30 16:13:25	WLAN	AP_HIGH_UTILIZATION	Warning
2024-09-30 16:12:25	WLAN	AP_HIGH_UTILIZATION	Warning
2024-09-30 16:11:25	WLAN	AP_HIGH_UTILIZATION	Warning
2024-09-30 16:10:25	WLAN	AP_HIGH_UTILIZATION	Warning
2024-09-30 16:09:25	WLAN	AP_HIGH_UTILIZATION	Warning
2024-09-30 16:08:25	WLAN	AP_HIGH_UTILIZATION	Warning
2024-09-30 16:07:25	WLAN	AP_HIGH_UTILIZATION	Warning
2024-09-30 16:06:25	WLAN	AP_HIGH_UTILIZATION	Warning
2024-09-30 16:05:25	WLAN	AP_HIGH_UTILIZATION	Warning
2024-09-30 16:04:25	WLAN	AP_HIGH_UTILIZATION	Warning

- To view the logs of a specific module, enter the module name in the search box to access its operation logs.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Device Router Batch Config

Log List Export Log List Start Time - End Time WLAN

Time	Module	Message ID	Severity	Description
2024-09-30 16:13:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:12:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 94
2024-09-30 16:11:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:10:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:09:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:08:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:07:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 92
2024-09-30 16:06:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:05:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 94
2024-09-30 16:04:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 96

Total 949 1 2 3 4 5 6 ... 95 10/page

- To download the log files, click **Download Local Log File** to save the compressed log file to your local device for storage and backup. To export the log list, click **Export Log List** to download the log list in .csv format for viewing on your computer.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- o Syslog page in Network-Wide mode.

Specification

Only **Export Log list** is supported on the syslog page in Network-Wide mode, but **Download Local Log File** is not supported. To download the log file, click **One-Device > Config > System > Syslog** to access the device configuration page.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Device Router

Log List

Export Log List

Start Time - End Time

Search by Module/Message ID/S

Batch Config

Time	Module	Message ID	Severity	Description
2024-09-30 16:13:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:12:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 94
2024-09-30 16:11:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:10:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:09:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:08:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:07:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 92
2024-09-30 16:06:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:05:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 94
2024-09-30 16:04:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 96

Total 1024

1 2 3 4 5 6 ... 103

10/page

- Syslog page in Standalone mode.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Time	Module	Message ID	Severity	Description
2024-09-30 16:21:26	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 96
2024-09-30 16:20:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 93
2024-09-30 16:19:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 94
2024-09-30 16:18:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 94
2024-09-30 16:17:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:16:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:15:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 94
2024-09-30 16:14:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 94
2024-09-30 16:13:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:12:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 94

13.1.2 Configuring System Logs

Go to the configuration page.

- In SON mode:
 - Choose **Network-Wide > System > Syslog**. Click **Batch Config**.

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

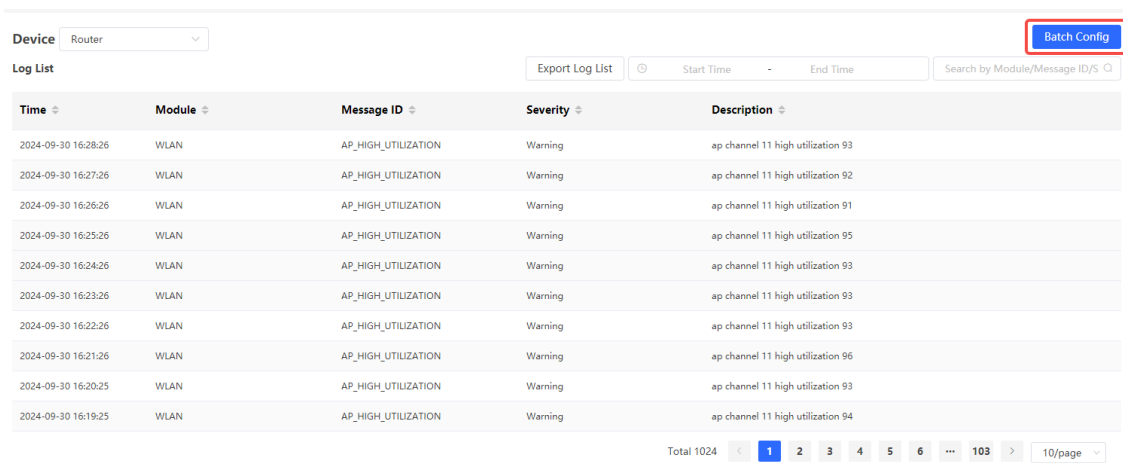

The screenshot displays the 'Log List' section of the Ruijie Cloud management interface. At the top, there is a 'Device' dropdown menu set to 'Router' and a 'Batch Config' button. Below these are filters for 'Export Log List', 'Start Time', 'End Time', and a search bar. The main area contains a table with columns for Time, Module, Message ID, Severity, and Description. The table lists ten log entries, all with a 'Warning' severity and a description of 'ap channel 11 high utilization' followed by a percentage. At the bottom right, there is a pagination bar showing 'Total 1024' logs, with page 1 selected out of 103 pages, and a '10/page' dropdown.

Time	Module	Message ID	Severity	Description
2024-09-30 16:28:26	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 93
2024-09-30 16:27:26	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 92
2024-09-30 16:26:26	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 91
2024-09-30 16:25:26	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 95
2024-09-30 16:24:26	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 93
2024-09-30 16:23:26	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 93
2024-09-30 16:22:26	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 93
2024-09-30 16:21:26	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 96
2024-09-30 16:20:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 93
2024-09-30 16:19:25	WLAN	AP_HIGH_UTILIZATION	Warning	ap channel 11 high utilization 94

- Choose **One-Device > Config > System > Syslog**. Click **Log Settings**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

The screenshot shows the 'Log Settings' page. At the top, there are tabs for 'View Log' and 'Log Settings'. Below this, the 'SYSLOG' section has a toggle switch that is currently turned on. Under 'Save Log', there are two options: 'Local device' and 'Enable', both with toggle switches. The 'Enable' toggle is also turned on. Below these, there is a 'Filter Rule' dropdown menu set to 'default' and an 'Edit' link. Further down, the 'Remote log server' section has a note 'Up to 4 entries can be added.' and an 'Add' button. Below this is a table with columns: 'Enable', 'Protocol', 'IP/Domain', 'Port', 'Rate Limiting', 'Log Format', 'Filter Rule', and 'Action'. The table is currently empty, showing 'No Data'. At the bottom of the page, there is a 'Save' button.

- In standalone mode, choose **System > Syslog**. Click **Log Settings**.

1. Enabling Syslog

Toggle on **SYSLOG** to enable the SYSLOG protocol. When enabled, the device can connect with a remote log server to send log information over the network.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

SYSLOG

Save Log

Local device

Enable

Filter Rule

Remote log server

default

Up to 4 entries can be added.

Save

Edit

Add

Enable	Protocol	IP/Domain	Port	Rate Limiting	Log Format	Filter Rule	Action
No Data							

2. Configuring Local Logs

Local log saving is enabled by default. Click **Edit**, and then **Add** to create filtering rules for device operation logs, allowing you to exclude certain operation logs (like debug messages from all modules) from being displayed in the log list.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

⚠ Caution

When local log saving is disabled, all actions performed on the device will no longer be displayed in the log list. Please exercise caution.

SYSLOG

Save Log

Local device

Enable

Filter Rule

default

2 Edit

Remote log server

Up to 4 entries can be added.

Add

Enable	Protocol	IP/Domain	Port	Rate Limiting	Log Format	Filter Rule	Action
No Data							

Save

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

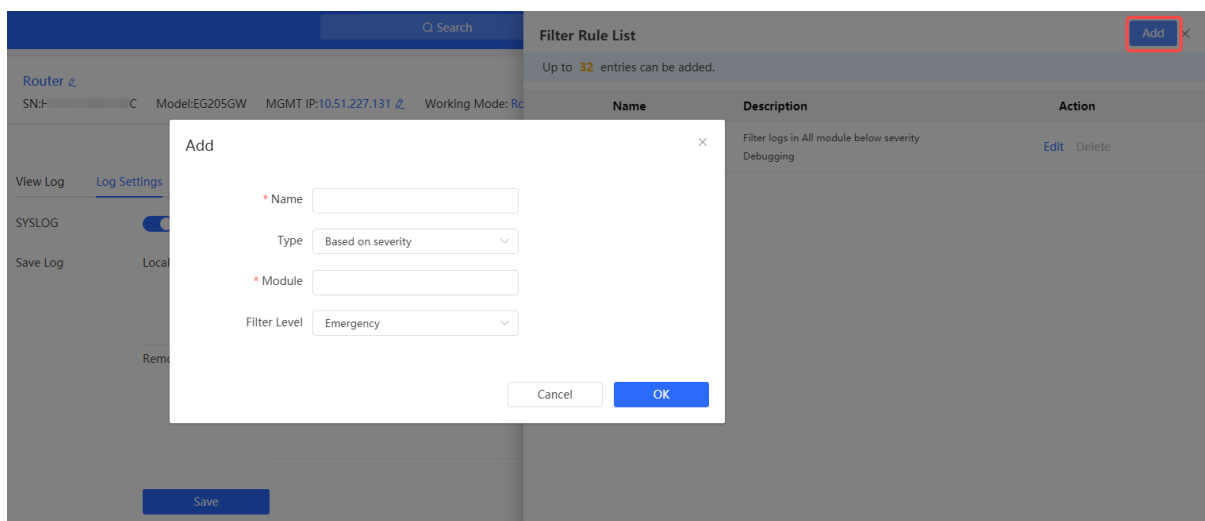

3. Configuring Remote Log Server

Click **Add** next to the **Remote log server** to add basic information of the remote log server.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

SYSLOG

Save Log

Local device

Enable

Filter Rule

default

Edit

Remote log server

Up to 4 entries can be added.

Add

Enable	Protocol	IP/Domain	Port	Rate Limiting	Log Format	Filter Rule	Action
No Data							

Save

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

Enable ☒

* IP/Domain

IPv4

* Port

514

Protocol

UDP

Rate Limiting

No Limit by Default

* Log Format ⓘ

☒ RFC3164 ☐ RFC5424

Filter Rule

default

[Edit](#)

Cancel

OK

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 13-1 Remote Log Server Configuration Parameters

Parameter	Description	Default Value
Enable	Enable or disable the remote log server. When enabled, the device will send its operation logs to the remote log server.	Enabled
IP/Domain	IP address or domain name of the remote log server. The IP address can be an IPv4 or IPv6 address.	N/A
Port	Port number of the remote log server.	514
Protocol	Protocol for communication between the device and the remote log server. Currently only UDP is supported.	UDP
Rate Limiting	The highest rate at which the device can send log data to the remote log server.	No limit

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description	Default Value
Log Format	The format of logs sent to the remote log server. RFC3164: <Priority> second-level local time Hostname Module Name % Message Identifier: Log Message. RFC5424: <Priority> microsecond-level UTC time Hostname Module % Process ID Message Identifier - Log Message.	RFC3164
Filter Rule	Rules for filtering device operation logs. Any logs that are filtered out will not be sent to the remote log server.	default is selected.

4. Batch Configuration

Go to the configuration page.

Choose **Network-Wide > System > Syslog**. Click **Batch Config**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Device	AP					Batch Config
Log List		Export Log List	Start Time	-	End Time	Search by Module/Message ID/S
Time	Module	Message ID	Severity	Description		
2024-09-26 14:43:08	EWEB	LOGIN	Informational	remotelp 172.17.97.103 login successful		

On the **Log Settings** page in Network-Wide mode, select the targeted devices and configure the log settings. Then, click **Save** to apply the settings to the selected devices.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

[← Back](#) **Log Settings**

Specified Devices

This feature will not take effect if configured on devices that do not support it.

Search by Device Name/SN/IP/VN

☒	Username	Model	SN	IP/MAC	Action
☒	Router	EG205GW	F- C	10.51.227.131 - 5	View Configuration It
☐	AP	RAP2260(E)	C- B	192.168.110.55 5- }	View Configuration It
☐	AP	RAP2370(H)	C-	192.168.110.249 [- 1	View Configuration It
☐	RAP2261E	RAP2261(E)	C-	192.168.110.29 1-	View Configuration It
☐	AP	RAP1200(E)	A- 4	192.168.110.22 E- :3	View Configuration It

Total 16 < 1 2 3 4 > 5/page

Below is the shared configuration template used by devices on this network, not the current configuration of any specific device.

SYSLOG

Save Log

Local device

Enable

Filter Rule

default

Edit

Remote log server

Up to 4 entries can be added.

Add

Enable	Protocol	IP/Domain	Port	Rate Limiting	Log Format	Filter Rule	Action
No Data							

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.


Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

After the log settings are successfully applied, click **View Configuration** to view the log settings of individual devices.

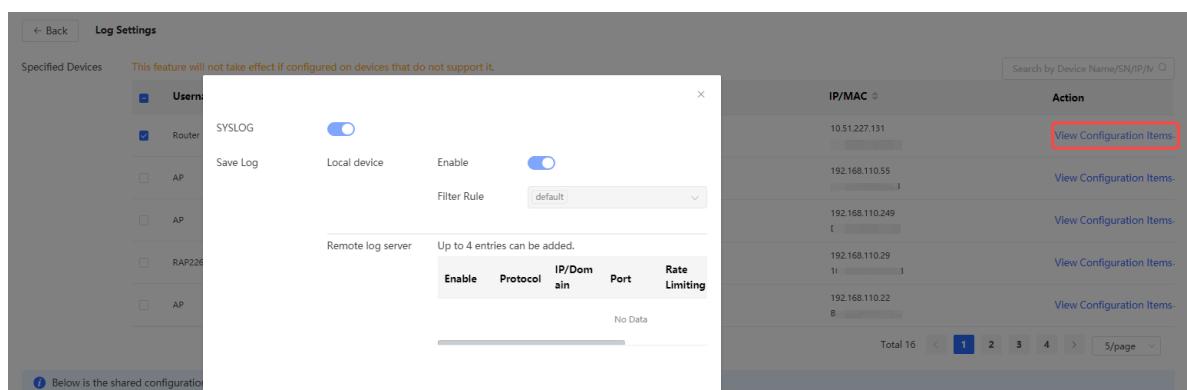

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

13.2 Setting the Login Password

Choose **Network-Wide > Workspace > Network-Wide > Password**.

Enter the old password and new password. After saving the configuration, log in again using the new password.

Caution

In the self-organizing network mode, the login password of all devices in the network will be changed synchronously.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

 Change the login password. Please log in again with the new password later.

*

Old Management Password

Enter old management password of the project.

*

New Management Password

The management passwords of the network-wide devices must be consistent.

There are four requirements for setting the password:

- The password must contain 8 to 31 characters.
- The password must contain uppercase and lowercase letters, numbers and three types of special characters.
- The password cannot contain admin.
- The password cannot contain question marks, spaces, and Chinese characters.

*

Confirm Password

Enter new management password again.

Password Hint

Enter a hint that can help you remember the management password.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

13.3 Setting the Session Timeout Duration

Choose **One-Device > Gateway > Config > System > Login > Session Timeout**.

If no operation is performed on the Web page within a period of time, the session is automatically disconnected. When you need to perform operations again, enter the password to log in again. The default timeout duration is 3600 seconds, that is, 1 hour.

* Session Timeout (?) seconds

Save

13.4 Restoring Factory Settings

13.4.1 Restoring the Current Device to Factory Settings

Choose **One-Device > Gateway > Config > System > Backup > Reset**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Click **Reset** to restore the current device to the factory settings.

 You can reset the device to factory settings by clicking the Factory Reset button below. If you want to retain the current configuration while performing a factory reset, then [back up the profile](#) the configuration file prior to the reset.



Reset

Tips



Resetting the device will clear the current settings and reboot the device. Do you want to continue?

Cancel

OK

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Caution

The operation will clear all configuration of the current device. If you want to retain the current configuration, back up the configuration first. (For details, see Section [13.10 Configuring Backup and Import](#).) Therefore, exercise caution when performing this operation.

13.4.2 Restoring All Devices to Factory Settings

Choose **Network-Wide > System > Reset**.

Click **All Devices**, select whether to enable **Keep Account and Password**, and click **Reset All Devices**. All devices in the network will be restored to factory settings.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

 You can reset the device to factory settings by clicking the Factory Reset button below. If you want to retain the current configuration while performing a factory reset, then [back up the profile](#) the configuration file prior to the reset. 

Select ☐ master device ☒ All Devices

Retain bound account ☒ [Selecting this checkbox will allow the cloud account to maintain its project management privileges without requiring you to rebind your account.](#)

Reset All Devices

⚠ Caution

The operation will clear all configuration of all devices in the network. Therefore, exercise caution when performing this operation.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

13.5 Configuring SNMP

13.5.1 Overview

The Simple Network Management Protocol (SNMP) is a protocol for managing network devices. Based on the client/server model, it can achieve remote monitoring and control of network devices.

SNMP uses a manager and agent architecture. The manager communicates with agents through the SNMP protocol to retrieve information such as device status, configuration details, and performance data. It can also be used to configure and manage devices.

SNMP can be used to manage various network devices, including routers, switches, servers, firewalls, etc. You can achieve user management through the SNMP configuration interface and monitor and control devices through the third-party software.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

13.5.2 Global Configuration

1. Overview

The purpose of global configuration is to enable the SNMP service and make the SNMP protocol version (v1/v2c/v3) take effect, so as to achieve basic configuration of local port, device location, and contact information.

SNMP v1: As the earliest version of SNMP, SNMP v1 has poor security, and only supports simple community string authentication. SNMP v1 has certain flaws, such as plaintext transmission of community strings and vulnerability to attacks. Therefore, SNMP v1 is not recommended for modern networks.

SNMP v2c: As an improved version of SNMP v1, SNMP v2c supports richer functions and more complex data types, with enhanced security. SNMP v2c performs better than SNMP v1 in terms of security and functionality, and is more flexible. It can be configured according to different needs.

SNMP v3: As the newest version, SNMP v3 supports security mechanisms such as message authentication and encryption compared to SNMP v1 and SNMP v2c. SNMP v3 has achieved significant improvements in security and access control.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

2. Configuration Steps

Choose **Network-Wide** > **Workspace** > **Network-Wide** > **SNMP** > **Global Config**

- (1) Enable the SNMP service.

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

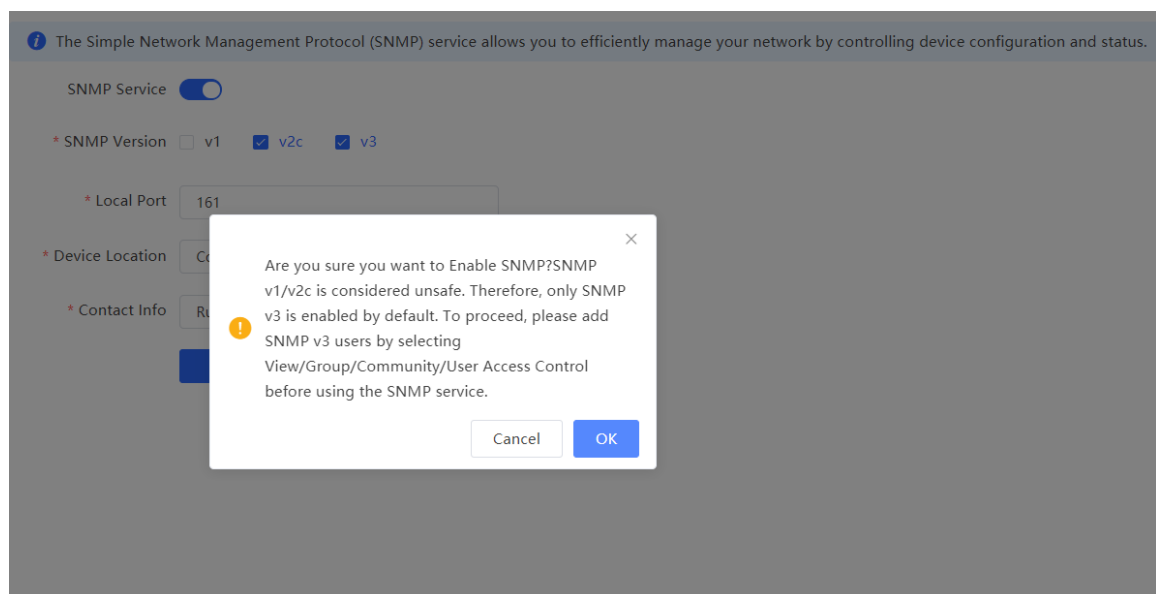

When it is enabled for the first time, SNMP v3 is enabled by default. Click **OK**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (2) Set SNMP service global configuration parameters.

SNMP Service ☒

* SNMP Version ☒ v1 ☒ v2c ☒ v3

* Local Port

161

* Device Location

Company

* Contact Info

Ruijie@Ruijie.com

Save

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 13-2 Global Configuration Parameters

Parameter	Description
SNMP Server	Indicates whether SNMP service is enabled.
SNMP Version	Indicates the SNMP protocol version, including v1, v2c, and v3 versions.
Local Port	The port range is 1 to 65535.
Device Location	1-64 characters. Chinese characters, full-width characters, question marks, and spaces are not allowed.
Contact Info	1-64 characters. Chinese characters, full-width characters, question marks, and spaces are not allowed.

- (3) After the SNMP service is enabled, click **Save** to make basic configurations such as the SNMP protocol version number take effect.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

13.5.3 View/Group/Community/User Access Control

1. Configuring Views

- Overview

Management Information Base (MIB) can be regarded as a database storing the status information and performance data of network devices. It contains a large number of object identifiers (OIDs) to identify the status information and performance data of these network devices.

Views in SNMP can limit the range of MIB nodes that the management system can access, thereby improving the security and reliability of network management. Views are an indispensable part of SNMP and need to be configured or customized according to specific management requirements.

A view can have multiple subtrees. The management system can only access MIB nodes in these subtrees, and cannot access other unauthorized MIB nodes. This can prevent unauthorized system administrators from accessing sensitive MIB nodes, thereby protecting the security of network devices. Moreover, views can also improve the efficiency of network management and speed up the response from the management system.

- Configuration Steps

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Choose **Network-Wide > Workspace > Network-Wide > SNMP > View/Group/Community/Client Access Control**

- (1) Click **Add** under the **View List** to add a view.

View List + Add Delete Selected

☐	View Name	Action
☐	all	
☐	none	
☐	public_view	Edit Delete
☐	system	Edit Delete

Up to 20 entries can be added.

Total 4 < **1** > 10/page

- (2) Configure basic information of a view.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

* View Name

OID

Example: .1.3

Add Included Rule

Add Excluded Rule

Rule/OID List

🗑 Delete Selected

Up to 100 entries are allowed.

☐

Rule

OID

Action

No Data

Total 0

10/page

<

1

>

Go to page

1

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 13-3 View Configuration Parameters

Parameter	Description
View Name	Indicates the name of the view. 1-32 characters. Chinese or full width characters are not allowed.
OID	Indicates the range of OIDs included in the view, which can be a single OID or a subtree of OIDs.
Type	There are two types of rules: included and excluded rules. ● The included rule only allows access to OIDs within the OID range. Click Add Included Rule to set this type of view. ● Excluded rules allow access to all OIDs except those in the OID range. Click Add Excluded Rule to configure this type of view.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Note

A least one OID rule must be configured for a view. Otherwise, an alarm message will appear.

- (3) Click **OK**.

2. Configuring v1/v2c Users

- Overview

When the SNMP version is set to v1/v2c, user configuration is required.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

SNMP Service ☒

* SNMP Version ☒ v1 ☒ v2c ☐ v3

* Local Port

* Device Location

* Contact Info

Save

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

⚠ Note

Select the SNMP protocol version, and click **Save**. The corresponding configuration options will appear on the **View/Group/Community/User Access Control** page.

● Configuration Steps

Choose **Network-Wide > Workspace > Network-Wide > SNMP > View/Group/Community/Client Access Control**

- (1) Click **Add** in the **SNMP v1/v2c Community Name List** pane.

SNMP v1/v2c Community Name List

+ Add

Delete Selected

☐	Community Name	Access Mode	MIB View	Action
☐	snmp_v2c_group	Read-Only	all	Edit Delete

Up to 20 entries can be added.

Total 1

<1>

10/page

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (2) Add a v1/v2c user.

Add

×

* Community Name

* Access Mode

* MIB View [Add View +](#)

Cancel

OK

1 Configuration Guide

SD-WAN

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 13-4 v1/v2c User Configuration Parameters

Parameter	Description
Community Name	- At least 8 characters. - It must contain at least three character categories, including uppercase and lowercase letters, digits, and special characters. - Admin, public or private community names are not allowed. - Question marks, spaces, and Chinese characters are not allowed.
Access Mode	Indicates the access permission (read-only or read & write) for the community name.
MIB View	The options under the drop-down box are configured views (default: all, none).

Note

- Community names cannot be the same among v1/v2c users.
- Click **Add View** to add a view.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

3. Configuring v3 Groups

- Overview

SNMP v3 introduces the concept of grouping to achieve better security and access control. A group is a group of SNMP users with the same security policies and access control settings. With SNMP v3, multiple groups can be configured, each with its own security policies and access control settings. Each group can have one or more users.

- Prerequisites

When the SNMP version is set to v3, the v3 group configuration is required.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

SNMP Service ☒

* SNMP Version ☐ v1 ☐ v2c ☒ v3

* Local Port

* Device Location

* Contact Info

Save

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

⚠ Note

Select the SNMP protocol version, and click **Save**. The corresponding configuration options will appear on the **View/Group/Community/User Access Control** page.

● Configuration Steps

Choose **Network-Wide > Workspace > Network-Wide > SNMP > View/Group/Community/Client Access Control**

- (1) Click **Add** in the **SNMP v3 Group List** pane to create a group.

SNMP v3 Group List

						+ Add	Delete Selected
☐	Group Name	Security Level	Read-Only View	Read & Write View	Notification View	Action	
☐	default_group	Auth & Security	all	none	none	Edit	Delete

Up to 20 entries can be added.

Total 1 [<](#) **1** [>](#) 10/page [v](#)

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (2) Configure v3 group parameters.

Add

×

* Group Name

* Security Level

Allowlist & Security

▼

* Read-Only View

all

▼

Add View +

* Read & Write View

all

▼

Add View +

* Notification View

none

▼

Add View +

Cancel

OK

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 13-5 v3 Group Configuration Parameters

Parameter	Description
Group Name	Indicates the name of the group. ● 1-32 characters. ● Chinese characters, full-width characters, question marks, and spaces are not allowed.
Security Level	Indicates the minimum security level (authentication and encryption, authentication but no encryption, no authentication and encryption) of the group.
Read-Only View	The options under the drop-down box are configured views (default: all, none).
Read & Write View	The options under the drop-down box are configured views (default: all, none).
Notify View	The options under the drop-down box are configured views (default: all, none).

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Note

- A group defines the minimum security level, read and write permissions, and scope for users within the group.
 - The group name must be unique. To add a view, click **Add View**.
-

(3) Click **OK**.

4. Configuring v3 Users

- Prerequisites

When the SNMP version is set to v3, the v3 group configuration is required.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

SNMP Service ☒

* SNMP Version ☐ v1 ☐ v2c ☒ v3

* Local Port

* Device Location

* Contact Info

Save

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

⚠ Note

Select the SNMP protocol version, and click **Save**. The corresponding configuration options will appear on the **View/Group/Community/User Access Control** page.

● Configuration Steps

Choose **Network-Wide > Workspace > Network-Wide > SNMP > View/Group/Community/Client Access Control**.

- (1) Click **Add** in the **SNMP v3 Client List** pane to add a v3 user.

SNMP v3 Client List

+ Add

Delete Selected

	Username	Group Name	Security Level	Auth Protocol	Auth Password	Encryption Protocol	Encrypted Password	Action
☐								

No Data

Up to 50 entries can be added.

Total 0 < 1 > 10/page

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (2) Configure v3 user parameters.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

* Username

Username

* Group Name

default_group

* Security Level

Auth & Security

* Auth Protocol

MD5

* Auth Password

* Encryption Protocol

AES

* Encrypted Password

Cancel

OK

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 13-6 v3 User Configuration Parameters

Parameter	Description
Username	● At least 8 characters. ● It must contain at least three character categories, including uppercase and lowercase letters, digits, and special characters. ● Admin, public or private community names are not allowed. ● Question marks, spaces, and Chinese characters are not allowed.
Group Name	Indicates the group to which the user belongs.
Security Level	Indicates the security level (authentication and encryption, authentication but no encryption, and no authentication and encryption) of the user.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Auth Protocol, Auth Password	Authentication protocols supported: MD5/SHA/SHA224/SHA256/SHA384/SHA512. Authentication password: 8-31 characters. Chinese characters, full-width characters, question marks, and spaces are not allowed. It must contain at least three character categories, including uppercase and lowercase letters, digits, and special characters. Note: This parameter is mandatory when the security level is authentication and encryption, or authentication but no encryption.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Encryption Protocol, Encryption Password	Encryption protocols supported: DES/AES/AES192/AES256. Encryption password: 8-31 characters. Chinese characters, full-width characters, question marks, and spaces are not allowed. It must contain at least three character categories, including uppercase and lowercase letters, digits, and special characters. Note: This parameter is mandatory when the security level is authentication and encryption.

⚠ Note

- The security level of v3 users must be greater than or equal to that of the group.
- There are three security levels, among which authentication and encryption requires the configuration of authentication protocol, authentication password, encryption protocol, and encryption password. Authentication but no encryption only requires the configuration of authentication protocol and encryption protocol, while no authentication and encryption does not require any configuration.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

13.5.4 SNMP Service Typical Configuration Examples

1. Configuring SNMP v2c

● Application Scenario

You only need to monitor the device information, but do not need to set and deliver it. A third-party software can be used to monitor the data of nodes like 1.3.6.1.2.1.1 if v2c version is configured.

● Configuration Specification

According to the user's application scenario, the requirements are shown in the following table:

Table 13-7 User Requirement Specification

Item	Description
View range	Included rule: the OID is .1.3.6.1.2.1.1, and the custom view name is "system".

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Item	Description
Version	For SNMP v2c, the custom community name is "snmp_v2c_group", and the default port number is 161.
Read & write permission	Read-only permission.

● Configuration Steps

- (1) In the global configuration interface, select v2c and set other settings as default. Then, click **Save**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

SNMP Service ☒

* SNMP Version ☐ v1 ☒ v2c ☐ v3

* Local Port

161

* Device Location

Company

* Contact Info

Ruijie@Ruijie.com

Save

- (2) Add a view on the **View/Group/Community/Client Access Control** interface.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- a Click **Add** in the **View List** pane to add a view.
- b Enter the view name and OID in the pop-up window, and click **Add Included Rule**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

* View Name

system

OID

.1.3.6.1.2.1.1

Add Included Rule

Add Excluded Rule

Rule/OID List

Delete Selected

Up to 100 entries are allowed.

☐	Rule	OID	Action
☐	Included	.1.3.6.1.2.1.1	Delete

Total 1

10/page

< 1 >

Go to page

1

Cancel

OK

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- c Click **OK**.
-
- (3) On the View/Group/Community/Client Access Control interface, enter the SNMP v1/v2c community name.
 - a Click **Add** in the **SNMP v1/v2c Community Name List** pane.
 - b Enter the group name, access mode, and view in the pop-up window.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

* Community Name	snmp_v2c_group
* Access Mode	Read-Only
* MIB View	system Add View +

Cancel

OK

c Click **OK**.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

2. Configuring SNMP v3

● Application Scenario

You need to monitor and control devices, and use the third-party software to monitor and deliver device information to public nodes (1.3.6.1.2.1). The security level of v3 is authentication and encryption.

● Configuration Specification

According to the user's application scenario, the requirements are shown in the following table:

Table 13-8 User Requirement Specification

Item	Description
View range	Included rule: the OID is .1.3.6.1.2.1, and the custom view name is "public_view".

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Item	Description
Group configuration	Group name: default_group Security level: authentication and encryption Select public_view for a read-only view. Select public_view for a read & write view. Select none for a notify view.
Configuring v3 Users	User name: snmp_v3_user Group name: default_group Security level: authentication and encryption Authentication protocol/password: MD5/Ruijie123 Encryption protocol/password: AES/Ruijie123
Version	For SNMP v3, the default port number is 161.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

● Configuration Steps

- (1) On the global configuration interface, select v3, and change the port number to 161. Set other settings to defaults. Then, click **Save**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

SNMP Service ☒

* SNMP Version ☐ v1 ☐ v2c ☒ v3

* Local Port

161

* Device Location

Company

* Contact Info

Ruijie@Ruijie.com

Save

- (2) Add a view on the **View/Group/Community/Client Access Control** interface.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- a Click **Add** in the **View List** pane.
- b Enter the view name and OID in the pop-up window, and click **Add Included Rule**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

* View Name public_view

OID .1.3.2.6.1.2.1

Add Included Rule

Add Excluded Rule

Rule/OID List

Delete Selected

Up to 100 entries are allowed.

☐	Rule	OID	Action
☐	Included	.1.3.2.6.1.2.1	Delete

Total 1 10/page < 1 > Go to page 1

Cancel

OK

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- c Click **OK**.
- (3) On the View/Group/Community/Client Access Control interface, add an SNMP v3 group.
 - a Click **Add** in the **SNMP v3 Group List** pane.
 - b Enter the group name and security level on the pop-up window. As this user has read and write permissions, select `public_view` for read-only and read & write views, and select none for notify views.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add



* Group Name

default_group

* Security Level

Auth & Security



* Read-Only View

public_view



[Add View +](#)

* Read & Write View

public_view



[Add View +](#)

* Notification View

none



[Add View +](#)

Cancel

OK

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- c Click **OK**.
-
- (4) On the View/Group/Community/Client Access Control interface, add an SNMP v3 user.
 - a Click Add in the SNMP v3 Client List pane.
 - b Enter the user name and group name in the pop-up window. As the user's security level is authentication and encryption, enter the authentication protocol, authentication password, encryption protocol, and encryption password.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

* Username

* Group Name

* Security Level

* Auth Protocol

* Auth Password

* Encryption Protocol

* Encrypted Password

Cancel

OK

c Click **OK**.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

13.5.5 Configuring Trap Service

Trap is a notification mechanism of the Simple Network Management Protocol (SNMP) protocol. It is used to report the status and events of network devices to administrators, including device status, faults, performance, configuration, and security management. Trap provides real-time network monitoring and fault diagnosis services, helping administrators discover and solve network problems in a timely manner.

1. Enabling Trap Service

Enable the trap service and select the effective trap version, including v1, v2c, and v3 versions.

Choose **Network-Wide > Workspace > Network-Wide > SNMP > Trap Setting**

- (1) Enable the trap service. When the trap service is enabled for the first time, the system will pop up a prompt message. Click **OK**.

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

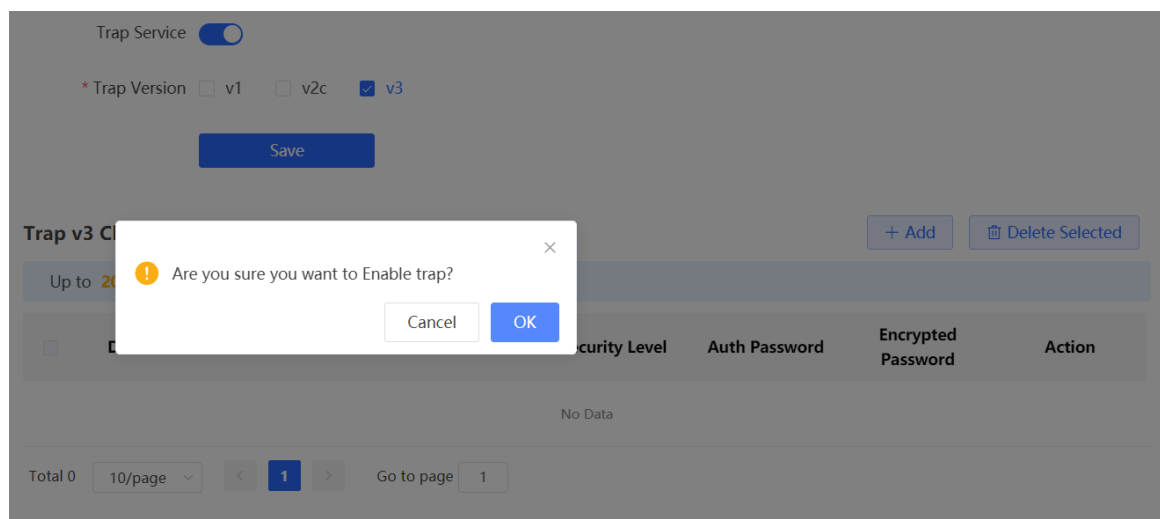

- (2) Set the trap version. The trap versions include v1, v2c, and v3.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Trap Service ☒

* Trap Version ☐ v1 ☐ v2c ☒ v3

Save

- (3) After the trap service is enabled, click **Save** for the configuration to take effect.

2. Configuring Trap v1/v2c Users

● Overview

Trap is a notification mechanism that is used to send alerts to administrators when important events or failures occur on devices or services. Trap v1/v2c are two versions in the SNMP protocol for network management and monitoring.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Trap v1 is the first version that supports basic alert notification functionality. Trap v2c is the second version, which supports more alert notification options and advanced security features.

By using trap v1/v2c, administrators can promptly understand problems on the network and take corresponding measures.

- Prerequisites

Once trap v1 and v2c versions are selected, it is necessary to add trap v1/v2c users.

- Procedure

Choose **Network-Wide > Workspace > Network-Wide > SNMP > Trap Setting**

- (1) Click **Add** in the **Trap v1/v2c Client List** pane to add a trap v1/v2c user.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Trap v1/v2c Client List

[+ Add](#)[Delete Selected](#)

Up to 20 entries are allowed.

☐	Dest Host IP	Version Number	Port ID	Community Name	Action

No Data

Total 0

10/page

<

1

>

Go to page

1

- (2) Configure trap v1/v2c user parameters.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

* Dest Host IP

* Version Number

* Port ID

* Community
Name/Username

Cancel

OK

1 Configuration Guide

SD-WAN

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 13-9 Trap v1/v2c User Configuration Parameters

Parameter	Description
Dest Host IP	IP address of the trap peer device. An IPv4 or IPv6 address is supported.
Version Number	Trap version, including v1 and v2c.
Port ID	The port range of the trap peer device is 1 to 65535.
Community Name/User Name	Community name of the trap user. ● At least 8 characters. ● It must contain at least three character categories, including uppercase and lowercase letters, digits, and special characters. ● Admin, public or private community names are not allowed. ● Question marks, spaces, and Chinese characters are not allowed.

Note

- The destination host IP address of trap v1/ v1/v2c users cannot be the same.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- Community names of trap v1/ v1/v2c users cannot be the same.
-

- (3) Click **OK**.

3. Configuring Trap v3 Users

- Overview

Trap v3 is a network management mechanism based on the SNMP protocol. It is used to send alert notifications to administrators. Unlike previous versions, trap v3 provides more secure and flexible configuration options, including authentication and encryption features.

Trap v3 offers custom conditions and methods for sending alerts, as well as the recipients and notification methods for receiving alerts. This enables administrators to have a more accurate understanding of the status of network devices and to take timely measures to ensure the security and reliability of the network.

- Prerequisites

When the v3 version is selected for the trap service, it is necessary to add a trap v3 user.

- Configuration Steps

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Choose **Network-Wide > Workspace > Network-Wide > SNMP > Trap Setting**

- (1) Click **Add** in the **Trap v3 User** pane to add a trap v3 user.

Trap Service ☒

* Trap Version ☐ v1 ☐ v2c ☒ v3

Save

Trap v3 Client List **+ Add** Delete Selected

Up to 20 entries are allowed.

☐	Dest Host IP	Port ID	Username	Security Level	Auth Password	Encrypted Password	Action
No Data							

Total 0

- (2) Configure trap v3 user parameters.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

* Dest Host IP	Support IPv4/IPv6	* Port ID	
* Username		* Security Level	Auth & Security
* Auth Protocol	MD5	* Auth Password	
* Encryption Protocol	AES	* Encrypted Password	

Cancel

OK

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 13-10 Trap v3 User Configuration Parameters

Parameter	Description
Dest Host IP	IP address of the trap peer device. An IPv4 or IPv6 address is supported.
Port ID	The port range of the trap peer device is 1 to 65535.
Username	Name of the trap v3 user. ● At least 8 characters. ● It must contain at least three character categories, including uppercase and lowercase letters, digits, and special characters. ● Admin, public or private community names are not allowed. ● Question marks, spaces, and Chinese characters are not allowed.
Security Level	Indicates the security level of the trap v3 user. The security levels include authentication and encryption, authentication but no encryption, and no authentication and encryption.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Auth Protocol, Auth Password	Authentication protocols supported: MD5/SHA/SHA224/SHA256/SHA384/SHA512. Authentication password: 8-31 characters. Chinese characters, full-width characters, question marks, and spaces are not allowed. It must contain at least three character categories, including uppercase and lowercase letters, digits, and special characters. Note: This parameter is mandatory when the security level is authentication and encryption, or authentication but no encryption.

1 Configuration Guide

SD-WAN

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Encryption Protocol, Encryption Password	Encryption protocols supported: DES/AES/AES192/AES256. Encryption password: 8-31 characters. Chinese characters, full-width characters, question marks, and spaces are not allowed. It must contain at least three character categories, including uppercase and lowercase letters, digits, and special characters. Note: This parameter is mandatory when the security level is authentication and encryption.

Note

The destination host IP address of trap v1/ v1/v2c users cannot be the same.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

13.5.6 Trap Service Typical Configuration Examples

1. Configuring Trap v2c

● Application Scenarios

During device monitoring, if the device is suddenly disconnected or encounters an abnormality, and the third-party monitoring software cannot detect and handle the abnormal situation in a timely manner, you can configure the device with a destination IP address of 192.168.110.85 and a port number of 166 to enable the device to send a v2c trap in case of an abnormality.

● Configuration Specification

According to the user's application scenario, the requirements are shown in the following table:

Table 13-11 User Requirement Specification

Item	Description
IP address and port number	The destination host IP is 192.168.110.85, and the port number is 166.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Item	Description
Version	Select the v2 version.
Community name/User name	Trap_user

● Configuration Steps

- (1) Select the v2c version in the **Trap Setting** interface and click **Save**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Trap Service ☒

* Trap Version ☐ v1 ☒ v2c ☐ v3

[Save](#)

Trap v1/v2c Client List [+ Add](#) [Delete Selected](#)

Up to 20 entries are allowed.

☐	Dest Host IP	Version Number	Port ID	Community Name	Action
No Data					

Total 0

- (2) Click **Add** in the Trap v1/v2c Client List to add a trap v2c user.
- (3) Enter the destination host IP address, version, port number, user name, and other information. Then, click **OK**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add



* Dest Host IP

* Version Number

* Port ID

* Community
Name/Username

Cancel

OK

2. Configuring Trap v3

- Application Scenarios

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

During device monitoring, if the device is suddenly disconnected or encounters an abnormality, and the third-party monitoring software cannot detect and handle the abnormal situation in a timely manner, you can configure the device with a destination IP address of 192.168.110.87 and a port number of 167 to enable the device to send a v3 trap, which is a safer trap compared with v1/v2c traps.

● Configuration Specification

According to the user's application scenario, the requirements are shown in the following table:

Table 13-12 User Requirement Specification

Item	Description
IP address and port number	The destination host IP is 192.168.110.87, and the port number is 167.
Version and user name	Select the v3 version and trapv3_user for the user name.
Authentication protocol/authentication password	Authentication protocol/password: MD5/Ruijie123
Encryption protocol/encryption password	Encryption protocol/password: AES/Ruijie123

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

● Configuration Steps

- (1) Select the v3 version in the **Trap Setting** interface and click **Save**.

Trap Service ☒

* Trap Version ☐ v1 ☐ v2c ☒ v3

Save

Trap v3 Client List **+ Add** **Delete Selected**

Up to 20 entries are allowed.

☐	Dest Host IP	Port ID	Username	Security Level	Auth Password	Encrypted Password	Action
No Data							

Total 0

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (2) Click **Add** in the Trap v3 Client List to add a trap v3 user.
- (3) Enter the destination host IP address, port number, user name, and other information. Then, click **OK**.

Add ×

* Dest Host IP	192.168.110.87	* Port ID	167
* Username	trap_v3_user	* Security Level	Auth & Security
* Auth Protocol	MD5	* Auth Password	Ruijie123
* Encryption Protocol	AES	* Encrypted Password	Ruijie123

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

13.6 Configure IEEE 802.1X authentication

13.6.1 Overview

IEEE 802.1X is a port-based network access control standard that provides secure access services for LANs.

On an IEEE 802 LAN, a user can directly access network resources without authentication and authorization as long as it can connect to a network device. This uncontrolled behavior can bring security risks to the network. The IEEE 802.1X protocol was proposed to address the security issues on an IEEE 802 LAN.

The IEEE 802.1X protocol supports three security applications: Authentication, Authorization, and Accounting, abbreviated as AAA.

- **Authentication:** Determines whether a user can obtain access, and restricts unauthorized users.
- **Authorization:** Authorizes services available for authorized users, and controls the permissions of unauthorized users.
- **Accounting:** Records the usage of network resources by users, and provides a basis for traffic billing.

The 802.1X feature can be deployed on networks to control user authentication, authorization, and more.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.


Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

An 802.1X network uses a typical client/server architecture, consisting of three entities: client, access device, and authentication server. A typical architecture is shown here.

Figure 13-1 Typical Architecture of 802.1X Network

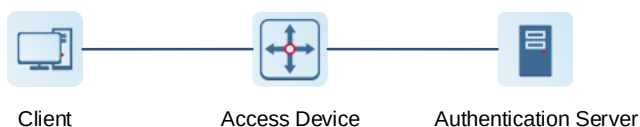

- The client is usually an endpoint device which can initiate 802.1X authentication through the client software. The client must support the Extensible Authentication Protocol over LANs (EAPoL) on the local area network.
- The access device is usually a network device (AP or switching device) that supports the IEEE 802.1X protocol. It provides an interface for clients to access the local area network, which can be a physical or a logical interface.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Note

- The RG-EG gateway device itself does not support the IEEE 802.1X authentication, and can only serve as the primary device to support 802.1X global configuration and deliver the configuration to APs and switching devices on the entire network.
 - To achieve IEEE 802.1X authentication, ensure that the network includes an AP or switching device.
-
- The authentication server can realize user authentication, authorization, and accounting. Usually a RADIUS server is used as the authentication server.

13.6.2 Configuring 802.1X Globally

The gateway device supports the 802.1X global configuration, and can synchronously deliver the configuration to APs and switching devices on the network.

Choose **Network-Wide > Workspace > Network-Wide > 802.1x Authentication > 802.1x Authentication**.

- (1) Click the **802.1x Authentication** tab to configure global configuration for 802.1x wireless authentication.
- (2) Select the authentication device group, and enable the global 802.1x authentication.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

You will be prompted to enable this feature or not. Click **OK**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

The screenshot shows the '802.1x Authentication' configuration page. At the top, there is a 'Device Group' dropdown menu set to 'Default'. Below this, the 'Global 802.1x Authentication' toggle switch is turned on. A blue link 'Go to Wi-Fi' is visible. A confirmation dialog box is overlaid in the center, asking 'Are you sure you want to Enable global 802.1x authentication?' with 'Cancel' and 'OK' buttons. At the bottom, there is a 'Client Packet Timeout Duration' field set to '30' seconds, with an 'Override' button below it.

802.1x Authentication Device Group: Default

Global 802.1x Authentication ☒

[Go to Wi-Fi](#)

Set the security mode of the SSID to 802.1X (Enterprise).

Escape

Re-authen

Are you sure you want to Enable global 802.1x authentication?

Cancel OK

* Client Packet Timeout Duration 30 s

Override

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (3) Click **Go to Wi-Fi**, and set the encryption method of SSID to **802.1x (Enterprise)**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

802.1x Authentication Device Group: Default

Global 802.1x ☒

Authentication

[Go to Wi-Fi](#)

Set the security mode of the SSID to 802.1X (Enterprise).

Escape SSID ☐

Re-authentication ☐



* Client Packet
Timeout Duration

30

s

Override

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Edit

* SSID  test

Purpose  **General** | IoT | Guest

Band  ☒ **2.4G** ☒ **5G**

No available frequency band? Log in to Ruijie Cloud to add or re-identify the target frequency band. [Re-identify](#) [View Causes](#)

Encryption ☐ Open ☐ Security ☒ **802.1x (Enterprise)**

* Security  WPA2-802.1X

Server Group Select  [Edit](#)

[advanced Setting](#)

Cancel

OK

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- (4) Configure global parameters.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

802.1x Authentication Device Group: Default

Global 802.1x ☒

Authentication

[Go to Wi-Fi](#)

Set the security mode of the SSID to 802.1X (Enterprise).

Escape SSID ☐

Re-authentication ☐



* Client Packet Timeout Duration

Override

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 13-13 Description of Global 802.1x Authentication Configuration

Parameter	Description
Escape SSID	Once this feature is enabled, when the authentication server is unavailable, the system will create a temporary Wi-Fi network for users. If this function is enabled, it is necessary to set the Escape SSID, encryption type, and Wi-Fi password.
Re-authentication	Once this feature is enabled, the system regularly re-authenticates users. Users who do not match the information on the server will be automatically disconnected. If this function is enabled, it is necessary to set the re-authentication cycle, which is 21600 seconds by default.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Client Packet Timeout Duration	The timeout period during which the client waits for a response from the authentication server. If this timer expires, authentication is considered failed. The value range is 10 seconds to 60 seconds. The default value is 30 seconds.

- (5) Click **Override**.

13.6.3 Configuring the RADIUS Server

1. Prerequisites

Before configuration, ensure that the RADIUS server is ready, and that the IP address and shared key of the RADIUS server are configured.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

2. Configuration Steps

Choose **Network-Wide** > **Workspace** > **Network-Wide** > **802.1x Authentication** > **RADIUS Server Management**.

- (1) Click the **RADIUS Server Management** tab.
- (2) Click **Add Server Group** to configure related server parameters.

RADIUS Server Management

Add Server Group

Server Group Name	Server IP	Auth Port	Accounting Port	Shared Password	Action

No Data

Up to 20 entries can be added.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Add

×

* Server Group Name

Server 1

* Server IP

* Server Name

* Auth Port

* Accounting Port ?

* Shared Password

* Match Order ?

+ Add Server

Cancel

OK

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Table 13-14 Description of RADIUS Server Management Configuration

Parameter	Description
Server IP	IP address of the RADIUS server.
Auth Port	The port number for the RADIUS server to perform user authentication.
Accounting Port	The port number for the RADIUS server to perform user accounting.
Shared Password	Shared key of the RADIUS server.
Match Order	The system supports up to five RADIUS servers. A larger value indicates a higher priority.

- (3) Enter the server global configuration parameters, and click **Save**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Server global configuration

Proxy Server ☐

* Packet Retransmission Interval s

* Packet Retransmission Count time

Server Detection ☐

MAC Address Format

Save

Table 13-15 Description of Server Global Configuration

Parameter	Description
Proxy Server	After this function is enabled, local device will act as a proxy for the RADIUS server to send RADIUS messages.

1 Configuration Guide

SD-WAN

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
Packet Retransmission Interval	Configure the interval during which the device sends a request to a RADIUS server before confirming that the RADIUS server is unreachable.
Packet Retransmission Count	Configure the number of times that the device sends requests to a RADIUS server before confirming that the RADIUS server is unreachable.
Server Detection	If this function is enabled, it is necessary to set the server detection cycle, server detection times, and server detection username. Determines the server status and whether to enable functions such as the escape function.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Parameter	Description
MAC Address Format	Configure the format of the MAC address used in attribute 31 (Calling-Station-ID) of a RADIUS message. The following formats are supported: ● Dotted hexadecimal format. For example, 00d0.f8aa.bbcc. ● IETF format. For example: 00-D0-F8-AA-BB-CC. ● Unformatted (default). For example: 00d0f8aabbcc

13.6.4 Checking Authentication User List

When the 802.1x feature is configured on the entire network, and a terminal is authenticated and connected to the network, you can view the list of authenticated users.

Choose **Network-Wide > Workspace > Network-Wide > 802.1x Authentication > Wireless User List/ Wired User List**.

Click **Wireless User List** or **Wired User List** to view specific user information.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

 The client going offline will not disappear immediately. Instead, the client will stay in the list for a more minutes.

Wireless User List

Refresh↓ Batch Logout

☐	Name	IP	MAC Address	Online Time	Connect SSID	Access Name	Action
No Data							

Total 0

<1>

10/page

Click **Refresh** to view the latest user list.

If you want to disconnect a user from the network, select the user and click **Logout** under the **Action** column. You can also select multiple users and click **Batch Logout** to disconnect selected users.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

13.7 Configuring Reboot

13.7.1 Rebooting the Current Device

Choose **One-Device > Gateway > Config > System > Reboot > Reboot**.

Click **Reboot**, and the device will be restarted. Please do not refresh or close the page during the reboot process.

After the device is rebooted, the browser will be redirected to the login page.

 Do not power off the device during reboot.

Reboot

13.7.2 Rebooting All Devices in the Network

Choose **Network-wide > System > Reboot > Reboot**.

Select **All Devices**, and click **Reboot All Device** to reboot all devices in the current network.

1 Configuration Guide

SD-WAN

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

 Do not power off the device during reboot.

Select

☐ master device

☒ All Devices

☐ Specified Devices

Reboot

Caution

The operation takes some time and affects the whole network. Therefore, exercise caution when performing this operation.

13.7.3 Rebooting the Specified Device

Choose **Network-Wide** > **Workspace** > **Network-Wide** > **Reboot** > **Reboot**.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Select the required devices from the list and click **Reboot**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Reboot

Scheduled Reboot

 Do not power off the device during reboot.


Select

☐ master device

☐ All Devices

☒ Specified Devices

hostname/Device Model 

☐		Username	Model	SN
☐		Gateway	EG1000	

Total 1



1



10/page



Reboot

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

13.8 Configuring Scheduled Reboot

Confirm that the system time is accurate to avoid network interruption caused by device reboot at wrong time. For details about how to configure the system time, see Section [13.9 Setting and Displaying System Time](#).

Choose **Network-Wide > Workspace > Network-Wide > Reboot > Scheduled Reboot**.

Turn on **Enable**, and select the date and time of scheduled reboot every week. Click **Save**. When the system time matches the scheduled reboot time, the device will restart. You are advised to set scheduled reboot time to off-peak hours.

Caution

The operation affects the whole network. Therefore, exercise caution when performing this operation.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

1. After this feature is enabled, the device will reboot at the scheduled time.
 2. You are advised to set the scheduled reboot time in the early morning or other service idle time.
- Note: When the upstream device is rebooted at the scheduled time, all downstream devices connected to it will also be rebooted.

Scheduled Reboot ☒

Repeats on ☒ Mon ☒ Tue ☒ Wed ☒ Thu ☒ Fri ☒ Sat ☒ Sun

Reboot Time :

Save

13.9 Setting and Displaying System Time

Choose **Network-Wide > System > System Time**.

You can view the current system time. If the time is incorrect, check and select the local time zone. If the time zone is correct but time is still incorrect, click **Edit** to manually set the time. In addition, the device supports

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Network Time Protocol (NTP) servers. By default, multiple servers serve as the backup of each other. You can add or delete the local server as required.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

i Configure and view system time (the device has no RTC module, and time settings are not saved upon restart).

Current Time ⓘ 2023-12-12 14:29:25

Edit

* Time Zone (GMT+7:00)Asia/Bangkok ▼

* NTP Server ⓘ 0.cn.pool.ntp.org Add

1.cn.pool.ntp.org Delete

cn.pool.ntp.org Delete

pool.ntp.org Delete

asia.pool.ntp.org Delete

europa.pool.ntp.org Delete

ntp1.aliyun.com Delete

Save

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Click **Current Time**, and the current system time will be filled in automatically.

Edit



* Time

🕒 Select a time.

Current Time

Cancel

OK

13.10 Configuring Backup and Import

Choose **Network-Wide > System > Backup & Import**.

Configuration backup: Click **Backup** to download a configuration file locally.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Configuration import: Click **Browse**, select a backup file on the local PC, and click **Import** to import the configuration file. The device will restart.

-  If the target version is much later than the current version, some configuration may be missing.
1. Before importing the configuration file, you are advised to [Reset](#) the device.
 2. After the configuration file is imported, the device will reboot automatically.

Backup Config ?

Backup Config

Backup

Import Config ?

File Path

Choose a file

Browse

Import

13.11 Configuring LEDs

Choose **Network-Wide** > **Workspace** > **Wireless** > **LED**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

- Configuring the LED status of network-wide APs

Click **Open All** or **Close All** to enable or disable the LEDs of all APs on the network.

LED ?		Batch Operation		✓ Open All	Close all	IP/MAC/hostname/SN/S
	Username	Model	SN	IP Address	Action	
	AP	RAP73HD	G	192.168.110.113		
	R260AP	RAP2260(G)	G	192.168.110.48		
	2261E	RAP2261(E)	M	192.168.110.41		
	2260G	RAP2260(G)	M	192.168.110.76		
Total 4		<	1	>	10/page	

- Configuring the LED status of selected APs

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Click **Batch Operation**, select the desired APs, and click **Open Selected** or **Close Selected** to enable or disable the LED status of the selected APs.

LED ?		Batch Operation		✓ Open All	Close all	IP/MAC/hostname/SN/S Q
	Username	Model	SN	IP Address	Action	
	AP	RAP73HD	G1SK48F000415	192.168.110.113		
	R260AP	RAP2260(G)	C C	192.168.110.48		
	2261E	RAP2261(E)	I 1	192.168.110.41		

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

LED ?		Exit Batch Operation		Open Selected	Close Selected	IP/MAC/hostname/SN/S Q
		Username	Model	SN	IP Address	Action
☐		AP	RAP73HD	C	192.168.110.113	☐
☒		R260AP	RAP2260(G)	I	192.168.110.48	☒
☒		2261E	RAP2261(E)	N	192.168.110.41	☒

- Configuring the LED status of a single AP

Toggle on or off the switch in the **Action** column to enable or disable the LED status of the corresponding AP.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

LED ?	Batch Operation ✓ Open All Close all IP/MAC/hostname/SN/S				
	Username	Model	SN	IP Address	Action
	AP	RAP73HD		192.168.110.113	
	R260AP	RAP2260(G)		192.168.110.48	
	2261E	RAP2261(E)		192.168.110.41	

13.12 Configuring Diagnostics

13.12.1 Network Check

When a network error occurs, perform **Network Check** to identify the fault and take the suggested action.

Choose **One-Device** > **Gateway** > **Config** > **Diagnostics** > **Network Check**.

Click **Start** to perform the network check and show the result.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Start

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Recheck

100%

WAN/LAN Cable Connection



Negotiation Speed



WAN Port Configuration



DHCP IP Address Allocation



WAN and LAN IP Conflicts



Loop Detection



DHCP Server Conflict



IP Conflicts



Routing Configuration



Next-Hop Connectivity



DNS Configuration



IP Session Count



✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

If a network error occurs, its symptom and suggested action will be displayed.

Cloud Service Configuration

Check Cloud Service

Result : The device is not enabled with cloud service. Cloud service may fail to start.

Suggestion : Please restore the device to factory settings or contact Ruijie technical support.

13.12.2 Alerts

Click **Alert Center** in the navigation bar.

The **Alert List** page displays possible problems on the network environment and device. All types of alerts are followed by default. You can click **Unfollow** in the **Action** column to unfollow this type of alert.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

⚠ Caution

After unfollowing a specified alert type, you will not discover and process all alerts of this type promptly. Therefore, exercise caution when performing this operation.

View and manage alarms.

Alert List

View Unfollowed Alert

Expand	Alerts	Suggestion	Action
▼	The IP address of the downlink device is already in use.	Please check the IP address of the downlink device. If it is a static IP address, please change the IP address.	Delete Unfollow

Device Name	SN	Type	Time	Details	Action
RG310G-E	N 39	EG310G-E	2023-12-12 14:32:05	An IP address conflict occurs. IP address: 10.52.48.106. Conflicting MAC address: f0:74:8d:b1:9d:e3 and 00:d0:f8:12:5a:2c	Delete

Total 1 < 1 > 10/page

Click **View Unfollowed Alert** to view the unfollowed alert. You can follow the alert again in the pop-up window.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

View Unfollowed Alert



The IP address of the downlink device is already in use.

[Re-follow](#)

Cancel

13.12.3 Network Tools

1. Ping

Choose **One-Device** > **Gateway** > **Config** > **Diagnostics** > **Network Tools**.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

The **Ping** command is used to detect the network connectivity.

Select **Ping** as the diagnosis mode, select the IP type, enter the destination IP address or website address, configure the ping count and packet size, and click **Start** to test the network connectivity between the device and the IP address or website. If "Ping failed" is displayed, the device is not reachable to the IP address or website.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Tool  ☒ Ping ☐ Traceroute ☐ DNS Lookup

Type ☒ IPv4 ☐ IPv6

* IP Address/Domain

* Ping Count

* Packet Size Bytes

Start

Stop

Result

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

2. Traceroute

Choose **One-Device > Gateway > Config > Diagnostics > Network Tools**.

The **Traceroute** function is used to identify the network path from one device to another. On a simple network, the network path may pass through only one routing node or none at all. On a complex network, packets may pass through dozens of routing nodes before reaching their destination. The traceroute function can be used to judge the transmission path of data packets during communication.

Select **Traceroute** as the diagnosis mode, select the IP type, and enter a destination IP address or the maximum TTL value used by the URL and traceroute, and click **Start**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Tool  ☐ Ping ☒ Traceroute ☐ DNS Lookup

Type ☒ IPv4 ☐ IPv6

* IP Address/Domain

* Max TTL

Start

Stop

Result

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

3. DNS Lookup

Choose **One-Device > Gateway > Config > Diagnostics > Network Tools**.

DNS Lookup is used to query the information of network domain name or diagnose DNS server problems. If the device can ping through the IP address of the Internet from your web page but the browser cannot open the web page, you can use the DNS lookup function to check whether domain name resolution is normal.

Select **DNS Lookup** as the diagnosis mode, enter a destination IP address or URL, and click **Start**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Tool  ☐ Ping ☐ Traceroute ☒ DNS Lookup

* IP Address/Domain

www.google.com

DNS

8.8.8.8

Start

Stop

Server: 8.8.8.8

Address: 8.8.8.8#53

Name: www.google.com

Address 1: 159.138.20.20

Address 2: 2a03:2880:f11a:83:face:b00c:0:25de

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

13.12.4 Packet Capture

Choose **One-Device > Gateway > Config > Diagnostics > Packet Capture**.

If the device fails and troubleshooting is required, the packet capture result can be analyzed to locate and rectify the fault.

Select an interface and a protocol and specify the host IP address to capture the content in data packets. Select the file size limit and packet count limit to determine the conditions for automatically stopping packet capture. (If the file size or number of packets reaches the specified threshold, packet capture stops and a diagnostic package download link is generated.) Click **Start** to execute the packet capture command.

Caution

The packet capture operation may occupy many system resources, causing network freezing. Therefore, exercise caution when performing this operation.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Interface ?

ALL

▼

Protocol ?

ALL

▼

IP Address ?

File Size Limit ?

2M

▼

Available Memory **776.54** M

Packet Count Limit ?

500

▼

PCAP file

[Click to download the PCAP file.](#) ⓘ

[Click to delete the file.](#)

Start

Stop

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Packet capture can be stopped at any time. After that, a download link is generated. Click this link to save the packet capture result in the PCAP format locally. Use analysis software such as Wireshark to view and analyze the result.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Interface ?

ALL

Protocol ?

ALL

IP Address ?

File Size Limit ?

2M

Available Memory **776.54 M**

Packet Count Limit ?

500

File Size: **106.77K**

Captured on: **2023-12-07 19:02:45**

PCAP file

[Click to download the PCAP file](#)

[Click to delete the file.](#)

Start

Stop

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

13.12.5 Fault Collection

Choose **One-Device > Gateway > Config > Diagnostics > Fault Collection**.

When the device fails, you need to collect the fault information. Click **Start**. The configuration files of the device will be packed into a compressed file. Download the compressed file locally and provide it to R&D personnel for fault locating.

 Compress the configuration file for engineers to identify fault.

Start

13.12.6 Viewing Flow Statistics

Choose **One-Device > Gateway > Config > Diagnostics > Flow Statistic**.

On the **Flow Table Packet Counters Page**, you can view the details of packets received by the device, including protocol, aging time, state, source IP address, destination IP address, source port, destination port, and so on.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Flow Table Packet Counters Page

protocol	aging_time	state1	src	dst	sport	dport	packets	bytes	state2	src_down	dst_down	sport_down	dport_down	packets_down	bytes_down	mark	use
udp	3	-	127.0.0.1	127.0.0.1	45982	53	1	71	-	127.0.0.1	127.0.0.1	53	45982	1	71	0	2
udp	1	-	192.168.2.5	192.168.2.1	39498	53	1	59	-	192.168.2.1	192.168.2.5	53	39498	1	169	1	2
udp	5	-	10.52.48.43	192.168.5.28	49271	53	1	58	-	192.168.5.28	10.52.48.43	53	49271	1	166	1	2
icmp	2	-	10.52.48.43	223.5.5.5	type=8 code=0	id=16145	1	84	-	223.5.5.5	10.52.48.43	type=0 code=0	id=16145	1	84	1	2
udp	4	-	192.168.2.2	192.168.2.1	59258	53	1	63	-	192.168.2.1	192.168.2.2	53	59258	1	430	1	2
udp	4	-	10.52.48.43	172.30.44.20	40322	53	1	63	-	172.30.44.20	10.52.48.43	53	40322	1	430	1	2
udp	2	-	127.0.0.1	127.0.0.1	36339	53	2	118	-	127.0.0.1	127.0.0.1	53	36339	2	260	0	2

⚠ Note

If the preceding troubleshooting steps fail to resolve the issue, and remote assistance from technical support is needed, you can contact them to assist in enabling the developer mode. The technical support team can then perform diagnostics to identify and address the issue effectively.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

13.13 Performing Upgrade and Checking System Version

Caution

You are advised to back up the configuration before upgrading the router.

Version upgrade will restart the device. Do not refresh or close the browser during the upgrade process.

13.13.1 Online Upgrade

Choose **One-Device > Gateway > Config > System > Upgrade > Online Upgrade**.

The current page displays the current system version and allows you to detect whether a later version is available. If a new version is available, click **Upgrade Now** to perform online upgrade. If the network environment does not support online upgrade, click **Download File** to download the upgrade installation package locally and then perform local upgrade.

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Note

Online upgrade will retain the current configuration.

Do not refresh the page or close the browser during the upgrade process. After successful upgrade, you will be redirected to the login page automatically.

Online Upgrade

Local Upgrade

 Online upgrade will keep the current configuration.
systool.upgradeWarningTip

Current Version ReyeeOS 2.000.0000.000 (Latest version)

13.13.2 Local Upgrade

Choose **One-Device > Gateway > Config > System > Upgrade > Local Upgrade**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

You can view the current software version and device model. If you want to upgrade the device with the configuration retained, select **Keep Config**. Click **Browse**, select an upgrade package on the local PC, and click **Upload** to upload the file. The device will be upgraded.


Model

Current Version

☐ Retain Configuration ☒ (If the target version is much later than the current version, you are advised not to retain the configuration.)

File Path

13.14 Switching System Language

Click  in the upper-right corner of the Web page.

Click a required language to switch the system language.

1 Configuration Guide

SD-WAN

✓ Specification


This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

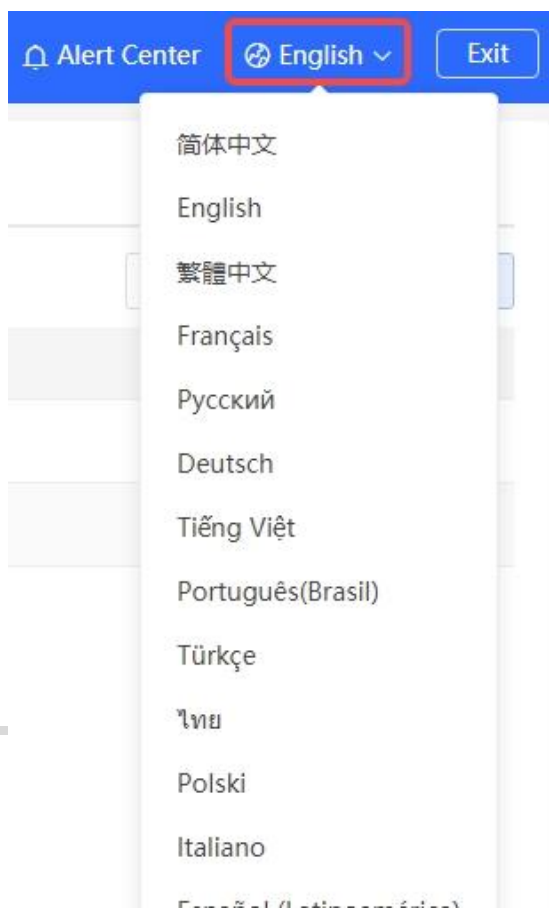

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

13.15 Configuring Cloud Service

13.15.1 Overview

The Cloud Service feature provides powerful remote network management and operation capabilities, making it convenient and efficient to manage geographically dispersed networks with diverse device types. This feature supports wireless devices, switches, and gateways, enabling unified network management and visualized monitoring and operation. Additionally, it also offers various components such as real-name authentication, dedicated Wi-Fi, and passenger flow analysis, allowing for flexible expansion of network services.

By configuring Cloud Service, you can conveniently manage networks through Ruijie Cloud or the Ruijie Reyee app.

13.15.2 Configuration Steps

Choose **One-Device > Gateway > Config > System > Cloud Service**.

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

If the device is not currently associated with a cloud account, simply follow the on-screen instructions to add it to the network. Open up the Ruijie Reyee app, click the scan icon at the upper left corner on the **Project** page, and enter the device's management password.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Scan to Connect Device to Ruijie Cloud for Remote Management



1

Open Ruijie Reyee

2

Scan the QR code

3

Connect to Ruijie Cloud

If the device cannot connect to Ruijie Cloud through QR code scanning, you can click the Configure Cloud Service button to connect the device to Ruijie Cloud.

[Configure Cloud Service](#)

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Once the device is associated with a cloud account, it will automatically be bound to a cloud server based on its geographic location.

Caution

Exercise caution when modifying cloud service configurations as improper modifications may lead to connectivity issues between the device and the cloud service.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Project Name:lg

Account: 18)

Unbind the account if you no longer wish to manage this project remotely.

Unbind

Cloud Server

✓ On-Premises Private Cloud Connected [Configure Cloud Service](#)

To change the Cloud Service configurations, select the cloud server from the **Cloud Server** drop-down list, enter the domain name and IP address, and click **Save**.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Cloud Server

☒ On-Premises Private Cloud Connected [Cancel](#)

This device is connected to Ruijie Cloud. The IP is 18.18.18.18, Exercise caution when modifying the cloud service configuration to ensure uninterrupted device connectivity.

Cloud Server [Reset](#)

* Domain Name [Configure IP](#)

Upload Certificate [Browse](#)

[Save](#)

Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Note

If the server selected is not **Other Cloud**, the system automatically fills in the domain name and IP address of the cloud server. When **Other Cloud** is selected, you need to manually configure the domain name and IP address and upload the cloud server certificate. .

13.15.3 Unbinding Cloud Service

Choose **One-Device > Gateway > Config > System > Cloud Service**.

You can click **Unbind** to unbind the account if you no longer wish to manage this project remotely.

1 Configuration Guide

SD-WAN

✓ Specification

This feature can only be configured in Ruijie Cloud.

Small and medium-sized chain businesses usually require service interconnectivity between their headquarters and branch offices for purposes such as supervision, information tracking, and video conferencing. These services demand high real-time performance and reliability. Moreover, pre-configuration and batch configuration features are often necessary during project deployment, in order to improve network deployment efficiency.

Ruijie Cloud's SD-WAN solution can effectively meet the above requirements and has the following advantages compared with traditional WAN solutions:

- (1) **Networking without public IP addresses:** Networking without public IP addresses enables remote connectivity across any broadband connection. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=017d4b240fbc443c9b383d63c35c5aac>.
- (2) **Visualized monitoring:** Map-based network monitoring provides a clear, intuitive overview of the entire network, projects, and links, with one-click alarm analysis. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=d48a89fb844a4795bf0f3967245597fd>.
- (3) **Batch configuration:** A template can be applied across multiple projects, eliminating the need for repetitive operations. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=586ede226ec04f0f9fe32ce1fdb34f56>.
- (4) **Pre-configuration deployment:** Templates can be created beforehand, which are automatically delivered to devices upon network connection, facilitating zero-touch provisioning onsite. For details, see <https://cloud.ruijienetworks.com/help/#!/ArticleList?id=6436c96a5cf94b9c97b92f863ff8bf06>.

System Management

Account: 1 

Unbind the account if you no longer wish to manage this project remotely.

Unbind

14 FAQs

14.1 Login Failure

- What can I do if I fail to log in to the Web management system?
 - (1) Confirm that the network cable is correctly connected to the LAN port of the device, and the corresponding indicator is flashing or solid on.
 - (2) Before you access the Web management system page, you are advised to configure the PC to automatically obtain an IP address, so the DHCP-enabled device automatically allocates an IP address to the PC. If you want to specify a static IP address to the PC, ensure that the IP address of the PC and the IP address of the device's LAN port are in the same network segment. For example, if the LAN port IP address is 192.168.110.1 and subnet mask is 255.255.255.0, set the PC IP address to 192.168.110.X (X representing any integer in the range of 2 to 254) and the subnet mask to 255.255.255.0.
 - (3) Run the ping command to test the connectivity between the PC and device. If ping fails, check the network settings.
 - (4) If you still cannot log in to the **Device Management** page after the preceding steps, restore the device to factory settings.

14.2 Password Loss/Factory Setting Restoration

- What can I do if I forget the login password? How can I restore the device to factory settings?

When the device is powered, press and hold the **Reset** button on the panel for 5 seconds. The device will restore factory settings after restart. Then, you can log in to the Web page of the device using the default IP address 192.168.110.1.

14.3 Internet Access Failure

- What can I do if the Internet access through PPPoE Dial-Up fails?
 - (1) Check whether the PPPoE account and password are correct. Please see Section [2.5.3 Forgetting the PPPoE Account](#) for details.
 - (2) Check whether the IP address allocated by the ISP conflicts with the IP address existing on the router.
 - (3) Check whether the MTU setting of the device meets the requirements of the ISP.

The default MTU is 1500. Please see Section [4.3.3 Modifying the MTU](#) for details.
 - (4) Check whether VLAN tagging should be configured for PPPoE.

VLAN tagging is disabled by default. Please see Section [4.3.5 Configuring the VLAN Tag](#) for details.